


Appendix 2: Construction Plans

Street, Grading and Drainage, Landscape & Irrigation Plans

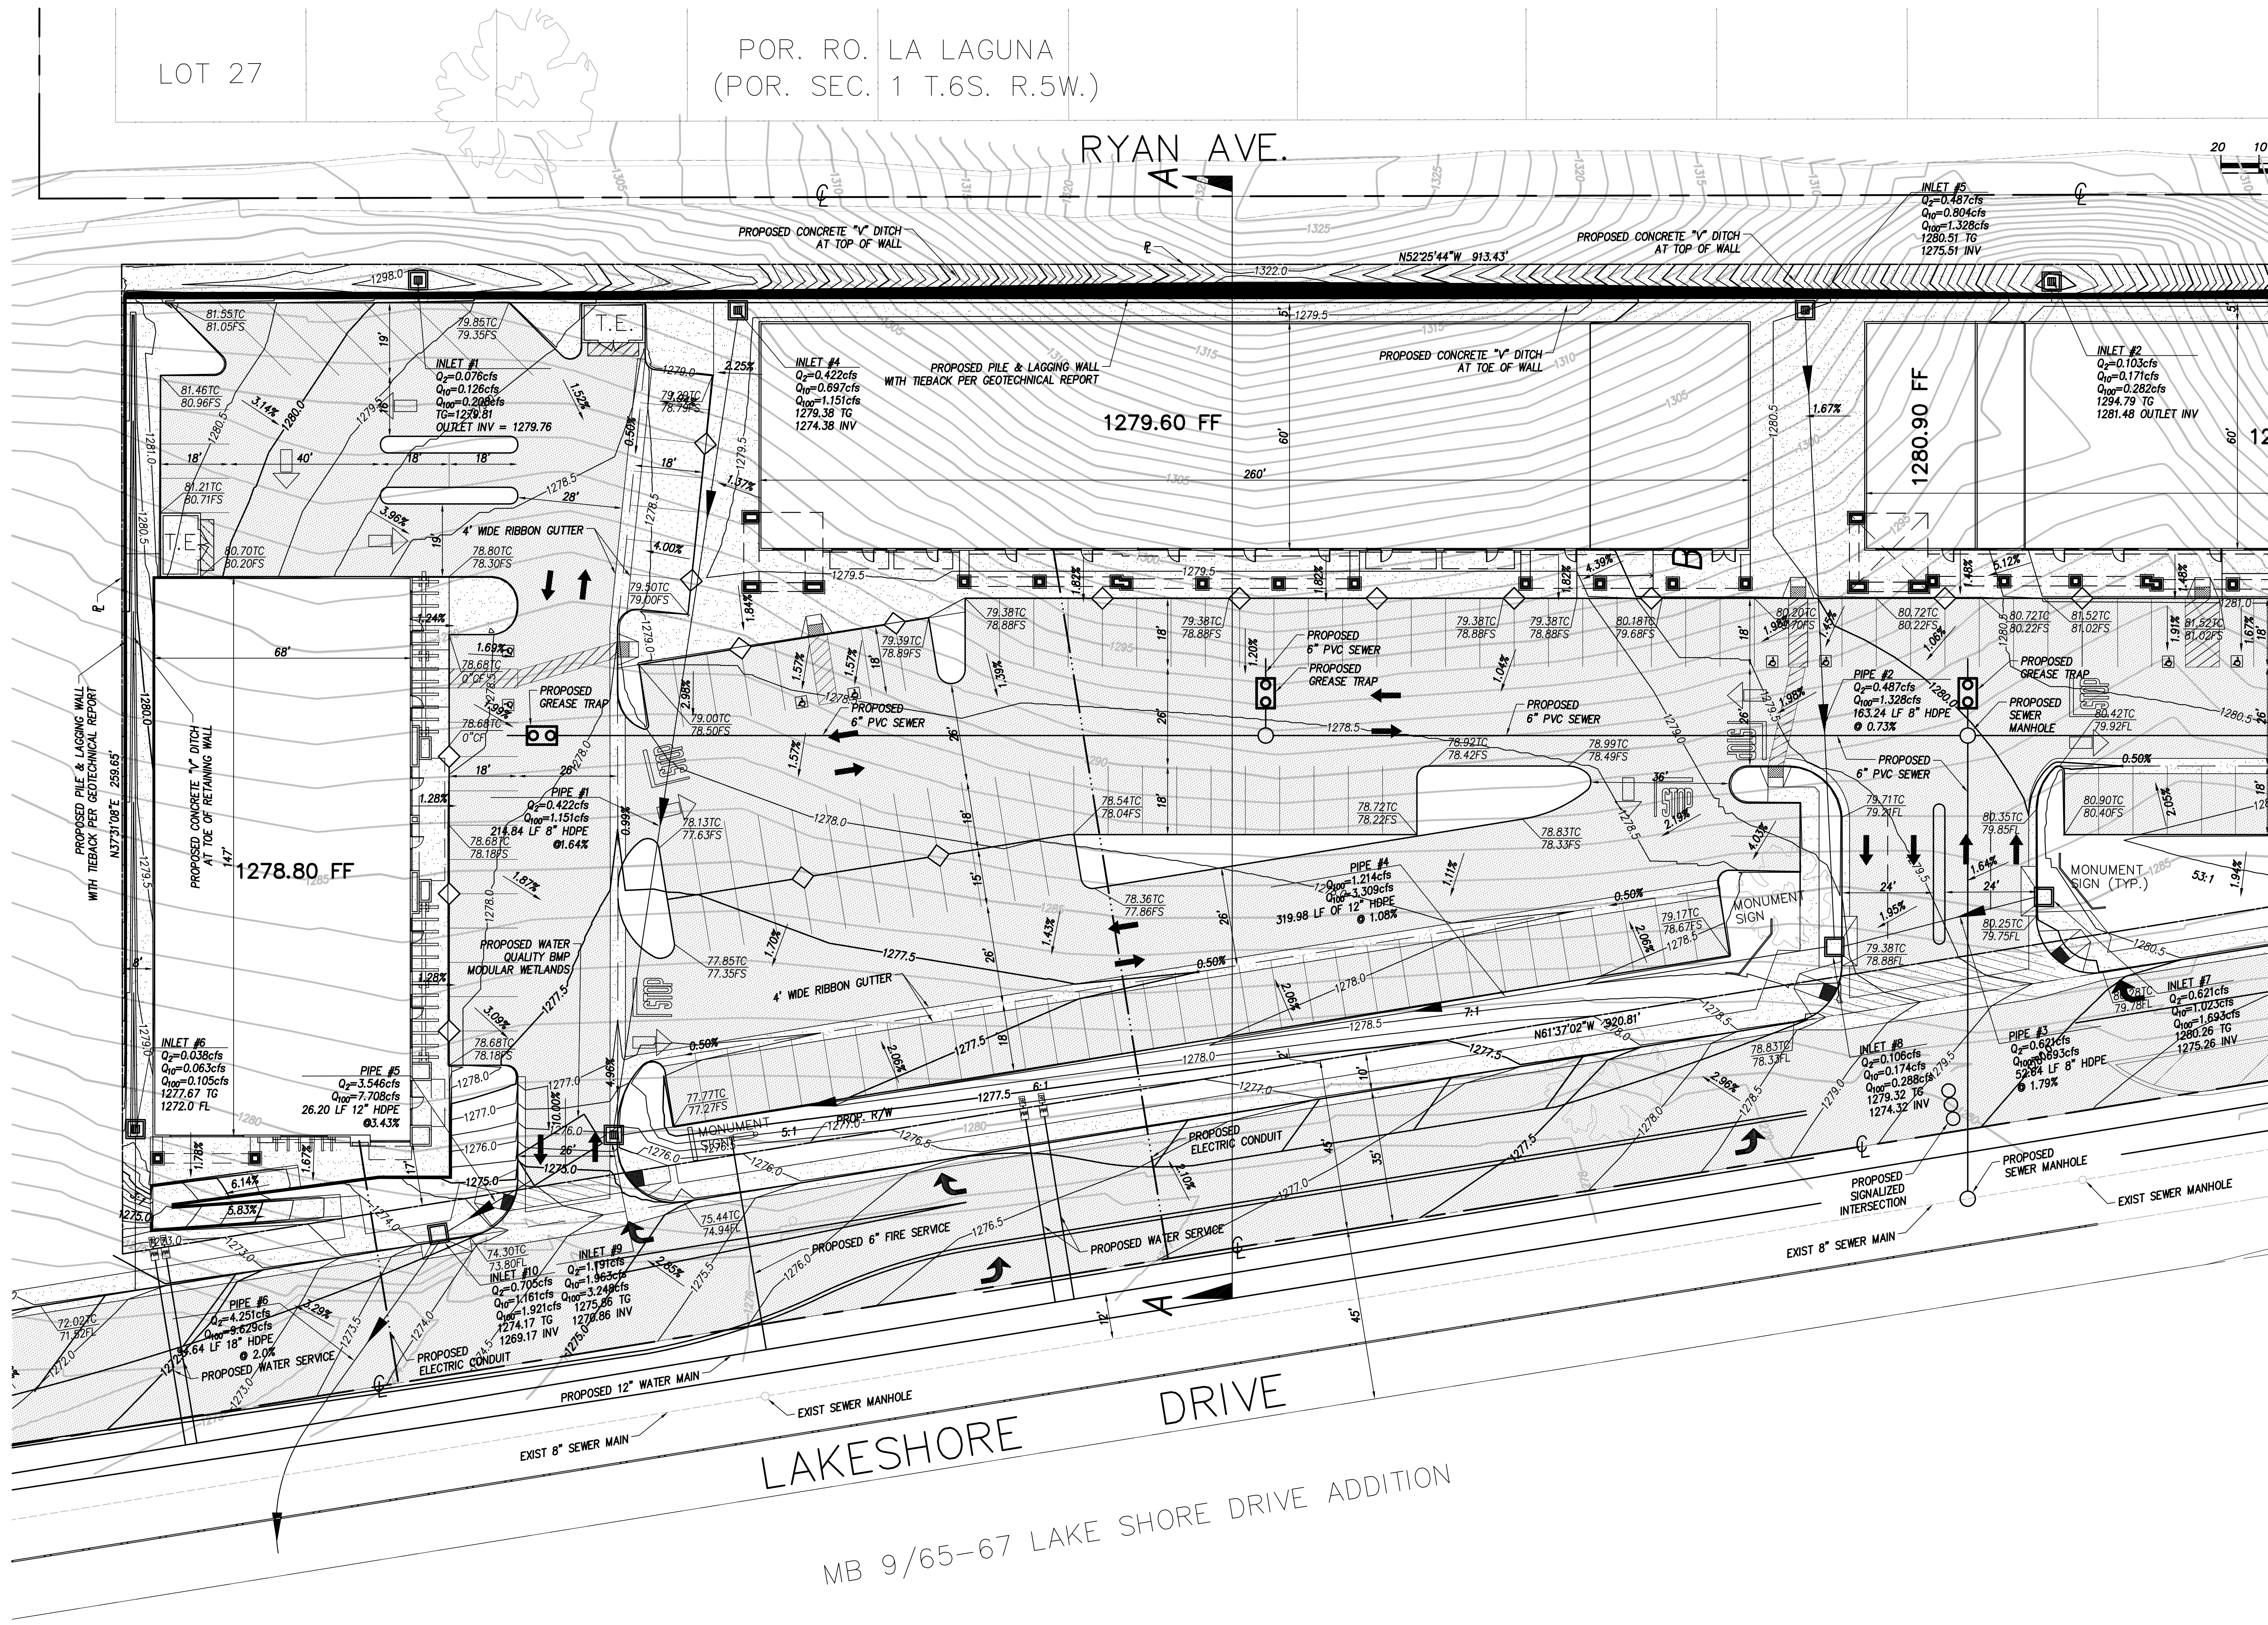


MATCHLINE SEE SHEET NO. 2


LOT 27

POR. RO. LA LAGUNA
(POR. SEC. 1 T.6S. R.5W.)

RYAN AVE.



18543 YORBA LINDA BL. #235
YORBA LINDA, CA 92886
714.749.3077




DRAWING ISSUE RECORD
DATE DESCRIPTION

REVISION RECORD
NO. DATE DESCRIPTION

PROJECT NAME

LAKEVIEW PLAZA
LAKESHORE DRIVE
LAKE ELSINORE, CALIFORNIA

PROFESSIONAL SEAL



SHEET TITLE

PRELIMINARY
GRADING PLAN

SHEET NUMBER

1 of 3

DATE: 8/14/19

MB 9/65-67 LAKE SHORE DRIVE ADDITION



LOT 10

RYAN AVE.


MANNING ST.

EXIST 8" SEWER MAIN

LAKE SHORE DRIVE

MB 9/65-67 LAKE SHORE DRIVE ADDITION

THE VALUES SHOWN HEREON ARE FOR PLAN CHECK ESTIMATING PURPOSES ONLY. CONTRACTOR SHALL PERFORM OWN QUANTITY ESTIMATE FOR BIDDING AND CONSTRUCTION. VOLUMES BASED ON A FINISH GRADE 8" BELOW DESIGN GRADES.


[illegible]

REVISION RECORD

PROJECT NAME

LAKEVIEW PLAZA
LAKESHORE DRIVE
LAKE ELSINORE, CALIFORNIA

PROFESSIONAL SEAL



SHEET TITLE

**PRELIMINARY
GRADING PLAN**

SHEET NUMBER

2 of 3


DATE: 8/14/19



PROJECT NAME

LAKEVIEW PLAZA
LAKE SHORE DRIVE
LAKE ELSINORE, CALIFORNIA

PROFESSIONAL SEAL



SHEET TITLE

**GRADING
SECTION**

SHEET NUMBER

3 of 3


DATE: 8/14/19



SCALE: HORIZ.: 1"=10'
VERT: 1"=5'

REVISIONS	BY

(949) 855-4413
 FAX 830-4465
 55A
 230111 Moulton Parkway
 PLANNING • RESEARCH
 Suite J12 • Laguna Hills, CA 92653



STAN SMITH ASSOCIATES

LANDSCAPE ARCHITECTURE

230111 Moulton Parkway

PLANNING • RESEARCH


Suite J12 • Laguna Hills, CA 92653

PRELIMINARY

PLANTING PLAN


THE LAKEVIEW PLAZA
 CORNER OF LAKESHORE DRIVE
 AND MANNING STREET
 LAKE ELSINORE, CA

DRAWN	SSA
CHECKED	SS
DATE	07/30/2019
SCALE	1"=40'-0"
JOB NO.	
SHEET	
L-1	
OF	SHEETS

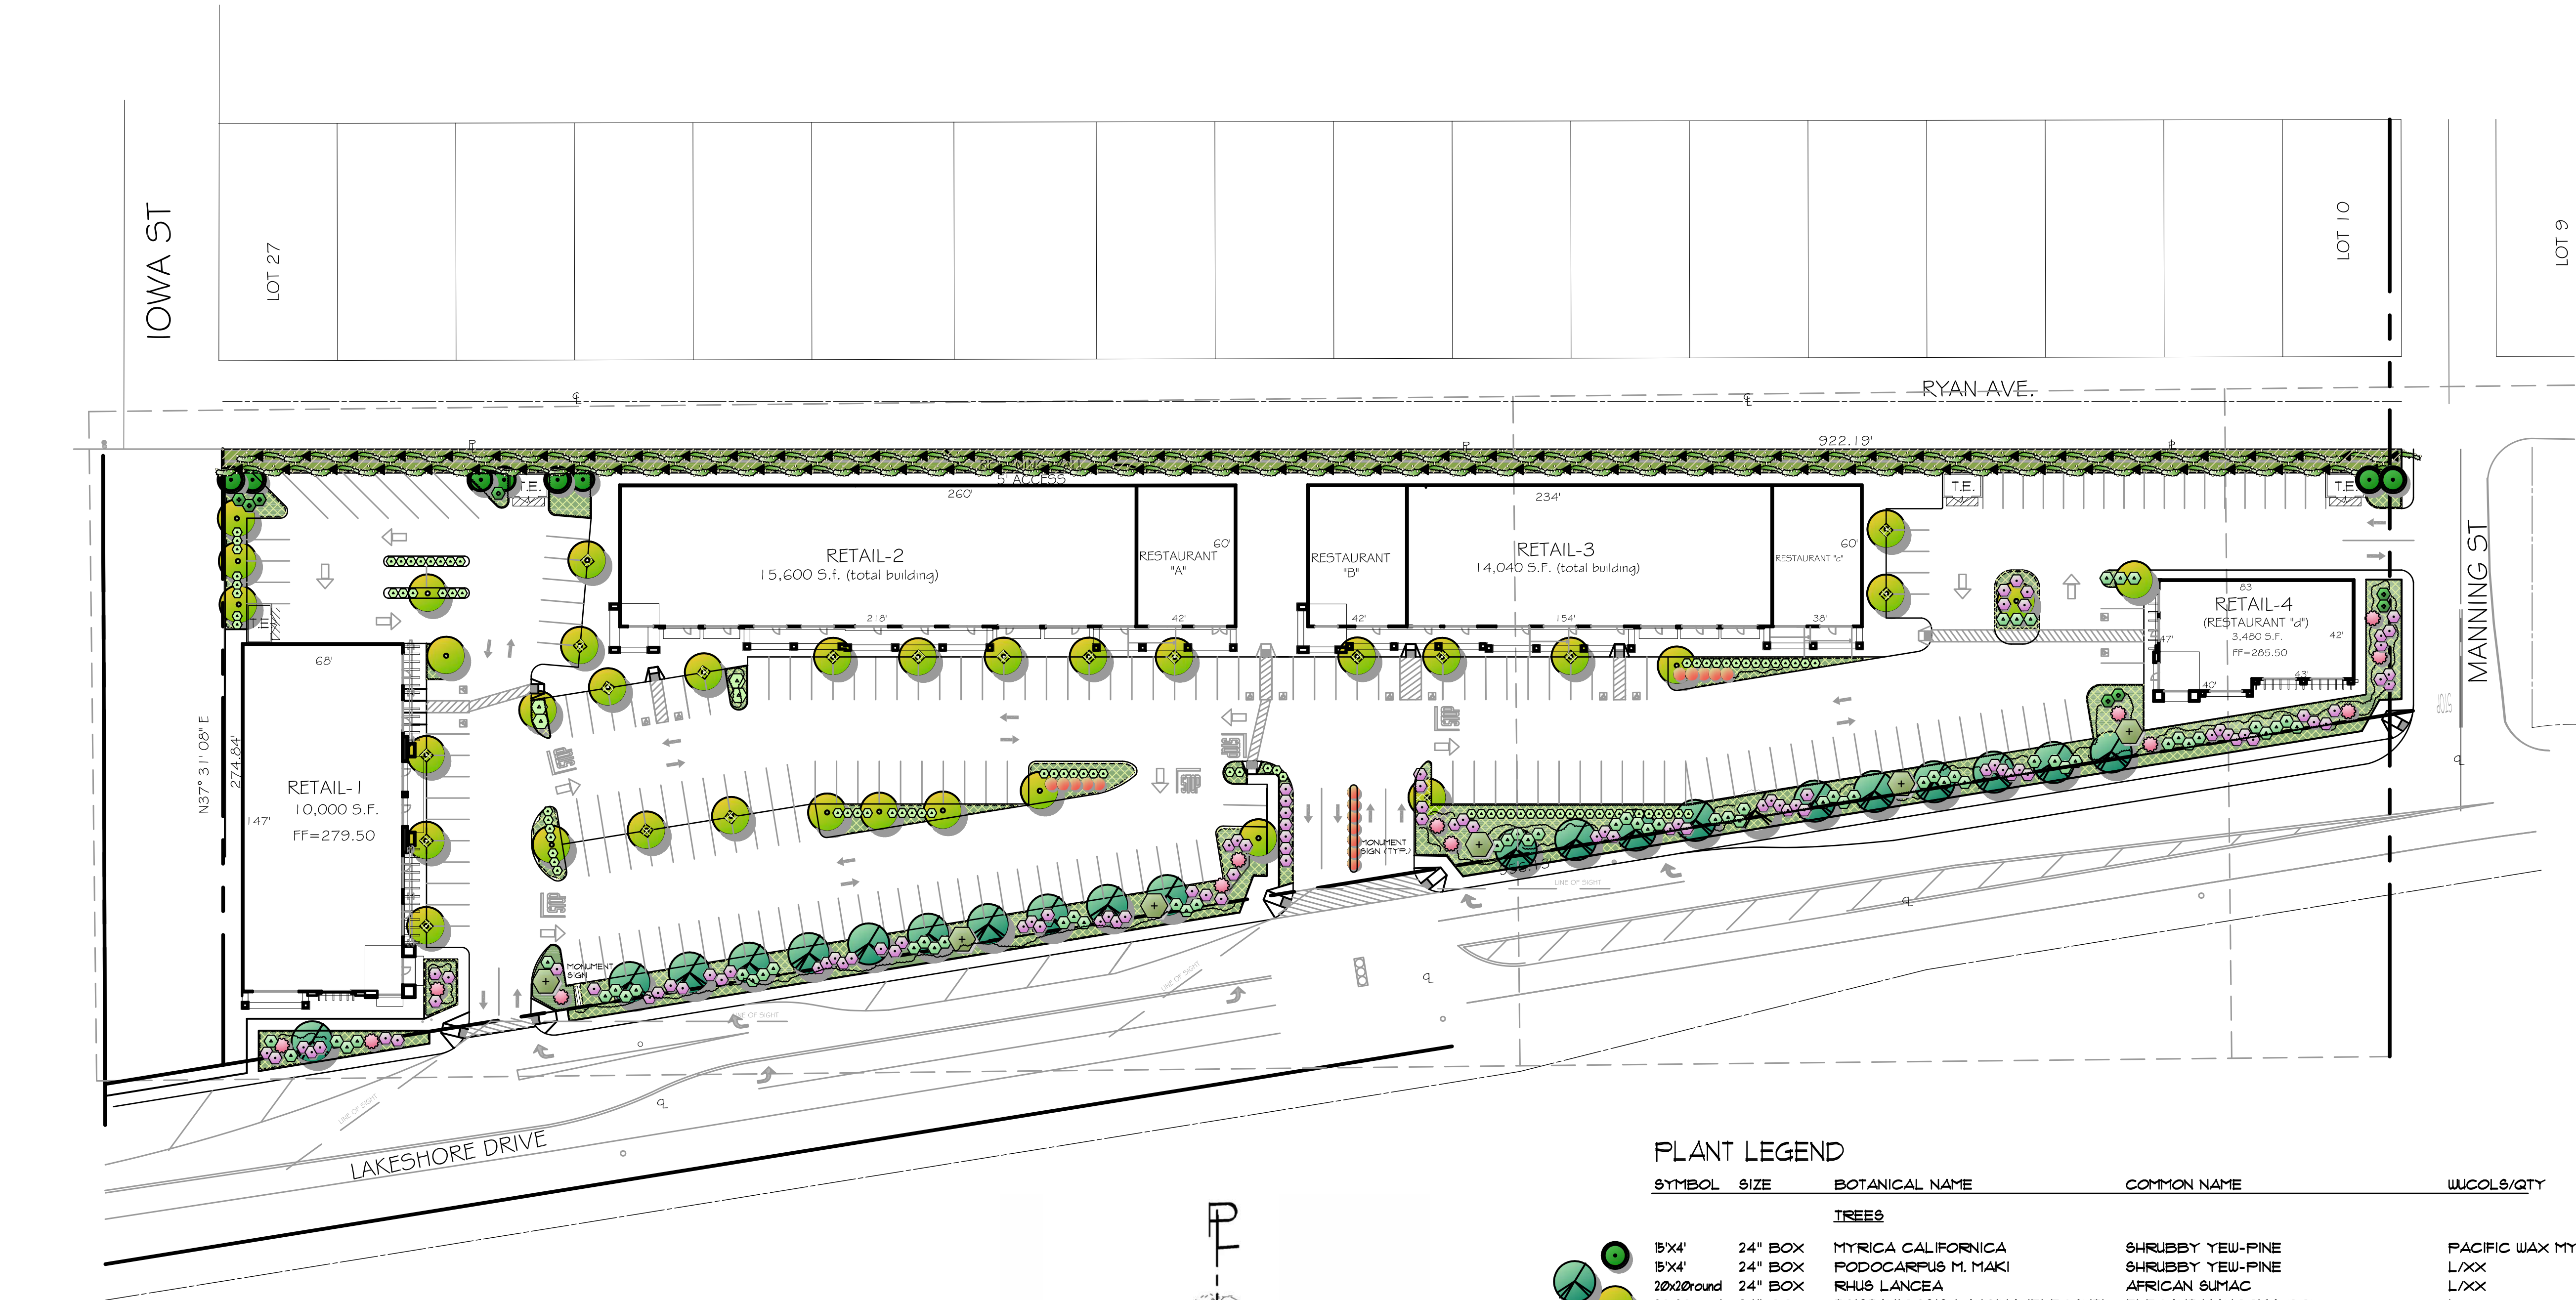



PLANTING NOTES

- CONTRACTOR SHALL VERIFY LOCATION OF ALL UNDERGROUND UTILITIES AND SERVICES PRIOR TO ANY DIGGING. CONTRACTOR ASSUMES FULL RESPONSIBILITY FOR ALL DAMAGE CAUSED BY FAILURE TO DO SO.
- PLANT MAINTENANCE WORK SHALL CONSIST OF APPLYING WATER, WEEDING, FERTILIZING PER SPECIFICATIONS.
- THE ENTIRE PROJECT IS TO BE MAINTAINED FOR A PERIOD OF 60 CALENDAR DAYS, COMMENCING FROM THE TIME ALL ITEMS OF WORK HAVE BEEN COMPLETED TO THE SATISFACTION OF THE LANDSCAPE ARCHITECT.
- CONTRACTOR SHALL BE RESPONSIBLE FOR DISEASE AND PEST CONTROL DURING THE MAINTENANCE PERIOD.
- CONTRACTOR SHALL RAISE OR LOWER SPRINKLER HEADS TO PROPER LEVEL IF PLANT MATERIAL OBSTRUCTS FULL COVERAGE.
- CONTRACTOR TO VERIFY WITH SOIL ANALYSIS, THE SOIL AMENDMENT AND CONTACT THE LANDSCAPE ARCHITECT IF THERE ARE ANY INADEQUATE AMENITIES.
- ALL SHRUBS AND GROUND COVER TO BE INSTALLED 1" ABOVE BACKFILL GRADE. COMPACT BACKFILL TO REMOVE MAJOR SETTLING OF PLANT MATERIAL.
- PLANTS CALLED OUT ON PLAN ARE CONSIDERED IN CLUSTERS EVEN IF NOT ATTACHED BY CONNECTING LINES. CALLOUTS WILL HAVE TOTAL COUNTS NEEDED.
- ALL PALM HEIGHTS CONSIDERED BROWN TRUNK HEIGHTS.
- ALL PLANTING BEDS TO RECEIVE 2" DEPTH OF FIR BARK MULCH - "FOREST FLOOR" OR EQUAL.
- ALL TREES WITHIN FIVE FEET (5') OF HARDSCAPE OR WALLS TO BE INSTALLED WITH A ROOT BARRIER.
- CONTRACTOR SHALL ENSURE THAT ALL TOP SOILS HAVE A MINIMUM OF 4" HORIZONTAL SEPARATION FROM BUILDING WEEP SCREED AND ALL SOIL SHALL SLOPE AWAY FROM THE BUILDING.

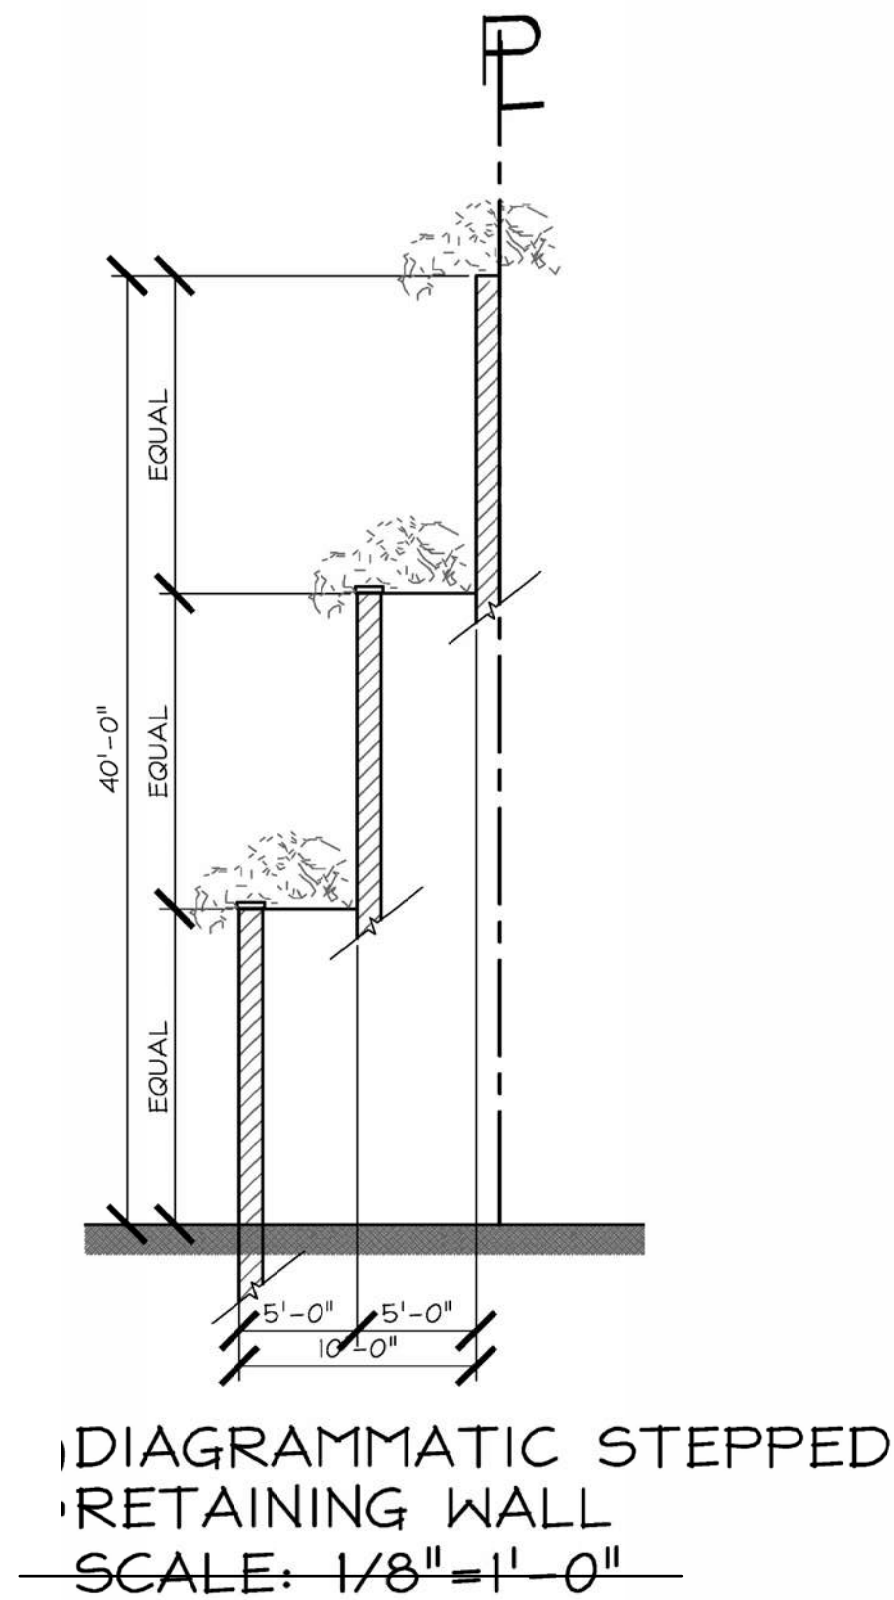

PLANT LEGEND

SYMBOL	SIZE	BOTANICAL NAME	COMMON NAME	WUCOLS/QTY
TREES				
	15'x4"	MYRICA CALIFORNICA	SHRUBBY YEW-PINE	PACIFIC WAX MYRTLE
	15'x4"	PODOCARPUS N. MAKI	SHRUBBY YEW-PINE	L/XX
	10x20round	RHUS LANCEA	AFRICAN SUMAC	L/XX
	10x20round	TRISTANIA LAURINA 'ELEGANT'	ELEGANT KANOOKA BOX	L/XX
SHRUBS				
	10x10'spec	CERCIS OCCIDENTALIS	WESTERN REDBUD	L/XX
	3x3dome	EUPHORBIA CARACIAS	DOVE EUPHORBIA	L/XX
	8'x8' (HEDGE)/24" BOX	FORESTIERA NEOMEXICANA	NEW MEXICAN PRIVET	L/XX
	8'x8'	MELALEUCA N. 'LITTLE NESSIE'	LITTLE NESSIE SHOUTY HONEY-MYRTLE	L/XX
	4'x4'	NERIUM OLEANDER 'PETITE PINK'	PETITE PINK OLEANDER	L/XX
	2'x2'	PITTOSPORUM C. 'NANA'	MINATURE KARO	L/XX
	8'x8'	PYRACANTHA COCCINEA	FIRETHORN	L/XX
GROUND COVERS				
	8'x8'	ROSMARINUS O. PROSTRATUS	PROSTRATE ROSEMARY	L/XX
	8'x8'	TRACHELOSPERMUM JASMINOIDES	STAR JASMINE	L/XX
VINES				
	VINE	PARTHENOCISSIS TRICUSPIDATA	BOSTON IVY	M/XX

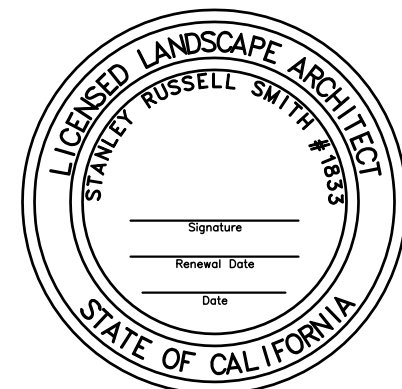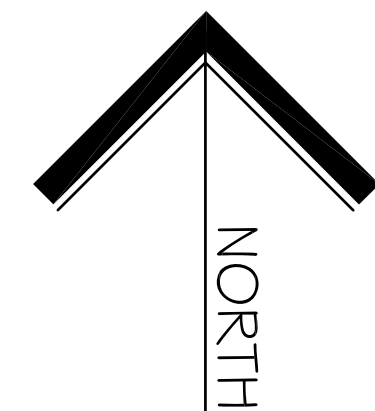

Appendix 3: Soils Information

Geotechnical Study and Other Infiltration Testing Data



soil PACIFIC INC.

Geotechnical and Environmental Services

February 13, 2019
Project No. A-6749-18

Mr. Shahin Motamed
Lake View Center LLC.
18103 Skypark Center # B -2
Irvine Ca 92614

**SUBJECT: Soil and Foundation Evaluation Report
Proposed Commercial Buildings
Lots 14-17 APN Numbers; 375 - 092 - 002, 003, 004, 005, & 006
Lake Shore Drive, Lake Elsinore, California**

Dear Sir;

Pursuant to your authorization, we are pleased to submit our report for the subject project. Our evaluation was conducted in October 2018. This evaluation consists of field exploration; sub-surface soil sampling; laboratory testing; engineering evaluation and preparation of the following report containing a summary of our conclusions and recommendations.

The opportunity to be of service is appreciated. Should any questions arise pertaining to any portion of this report, please contact this firm in writing for further clarification.


Respectfully submitted,

Soil Pacific, Inc.

Yones Kabir
President

Hoss Eftekhari
RCE

David Bramwell
CEG



**Soil and Foundation Evaluation Report
Proposed Commercial Buildings
Lots 14-17 APN Numbers; 375 - 092 - 002, 003, 004, 005, & 006
Lake Shore Drive, Lake Elsinore, California**

Prepared For:

**Mr. Shahin Motamed
Lake View Center LLC.
18103 Skypark Center # B -2
Irvine Ca 92614**

Prepared by:

**SOIL PACIFIC INC.
675 N. ECKHOFF STREET, SUITE A
ORANGE, CALIFORNIA 92868
Tel. (714) 879 1203**

**February 13, 2019
Project No. A-6749-18**

Table of Contents

Section 1.0 Preliminary Evaluation

- 1.1 Site Description
- 1.2 Planned land Use
- 1.3 Field Exploration
- 1.4 Laboratory Testing
 - 1.4.1 Classification
 - 1.4.2 Expansion
 - 1.4.3 Direct Shear

Section 2.0 Conclusions

- 2.1 Earth Materials
- 2.2 Foundations
- 2.3 Bearing Materials
- 2.4 Groundwater
- 2.5 CBC Seismic Design Parameters
- 2.6 Chemical Contents
- 2.7 Liquefaction Study/Secondary Seismic Hazard Zonation

Section 3.0 Recommendations

- 3.1 Clearing and Site Preparation
- 3.2 Site Preparation and Excavations
- 3.3 Stability of Temporary Cuts
- 3.4 Foundations
 - 3.4.1 Bearing Value
 - 3.4.2 Isolated Square Pad Footings
 - 3.4.3 Foundation Settlement
 - 3.4.4 Concrete Type
 - 3.4.5 Slabs-on-garde
- 3.5 Utility Trench Backfill
- 3.6 Seismic Design and Construction
- 3.7 Surface and Subsurface Drainage Provisions
- 3.8 Conventional Retaining Wall
- 3.9 Concrete Driveway
- 3.10 Storm Water Management
- 3.11 Observation and Testing

Illustrations

Appendix A Field Exploration

Appendix B Laboratory Testing

Appendix C References

Appendix D General Earthwork & Grading Specifications

**Soil and Foundation Evaluation Report
Proposed Commercial Buildings
Lots 14-17 of Lake Shore Drive, Lake Elsinore, California**

LIMITATIONS

Between exploratory excavations and/or field testing locations, all subsurface deposits, consequent of their anisotropic and heterogeneous characteristics, can and will vary in many important geotechnical properties. The results presented herein are based on the information in part furnished by others and as generated by this firm, and represent our best interpretation of that data benefiting from a combination of our earthwork related construction experience, as well as our overall geotechnical knowledge. Hence, the conclusions and recommendations expressed herein are our professional opinions about pertinent project geotechnical parameters which influence the understood site use; therefore, no other warranty is offered or implied.

All the findings are subject to field modification as more subsurface exposures become available for evaluations. Before providing bids, contractors shall make thorough explorations and findings. Soil Pacific Inc., is not responsible for any financial gains or losses accrued by persons/firms or third party from this project.

In the event the contents of this report are not clearly understood, due in part to the usage of technical terms or wording, please contact the undersigned in writing for clarification.

SECTION 1.0 PRELIMINARY EVALUATION

1.1 Site Description

The area covered by our investigation consists of a property identified as Lots 14-17 APN Numbers; 375 - 092 - 002, 003, 004, 005, & 006 and located at Lake Shore Drive, Lake Elsinore, California.

The property is comprised of 5 parcels within a mixed used zone of the City of Lake Elsinore. The subject site is located within 500 feet north of Elsinore Lake. The item parcels limited at the north by Ryan Avenue, at the east side by Manning Street, and at the west by Iowa Street (a projected Street). Site access will be provided from Lake Shore Drive.

The parcels are attached and formed a trapezoidal shaped vacant and undeveloped land. The entire property is a part of a south facing descending slope with steeper flank at the north. The slope angle toward the south/southwest becoming more gentle and flattened.

The average elevation of the site is about 1300 feet above the main sea level. Maximum height of slope is 90 feet. Property sheet flow is toward south southeast.

1.2 Planned Land Use

It is understood that the proposed construction will consist of commercial buildings. Site plan or conceptual development plan is underway and it is ready to review.

1.3 Field Exploration

A subsurface exploration program was performed under the direction of our staff engineer from SPI in September 2018. The exploration involved the excavation of four (2) exploratory borings (TP-1, TP-2, TP-3 and TP-4). Sub-surface test pit opening was limited to 5-10 feet below grade. The borings were advanced utilizing a backhoe. Earth materials encountered within the exploratory borings were classified and logged by the field engineer in accordance with the visual-manual procedures of the Unified Soil Classification System (USCS), ASTM Test Standard D2488. Following our exploration, borings were loosely backfilled with the soil cuttings. The approximate locations of the exploratory borings are shown on the Exploration Location Map Figure A-1-1. Descriptive boring logs are presented in Appendix A.

1.4 Laboratory Testing

1.4.1. Classification

Soils were classified visually according to the Unified Soil Classification System. Moisture content and dry density determinations were made for the samples taken at various depths in the

exploratory excavations. Results of moisture-density and dry-density determinations, together with classifications, are shown on the boring logs, Appendix A.

1.4.2 Expansion

An expansion index test was performed on a representative sample of on-site soils at proposed garde in accordance with the California Building Code. Soil expansion potential at proposed building area have very low or null for potential of expansion ($EI=0$).

1.4.3 Direct Shear

Shear strength parameters are determined by means of strain-controlled, double plain, direct shear tests performed in general accordance with ASTM D-3080. Generally, three or more specimens are tested, each under a different normal load, to determine the effects upon shear resistance and displacement, and strength properties such as Mohr strength envelopes. The direct shear test is suited to the relatively rapid determination of consolidated drained strength properties because the drainage paths through the test specimen are short, thereby allowing excess pore pressure to be dissipated more rapidly than with other drained stress tests. The rate of deformation is determined from the time required for the specimen to achieve fifty percent consolidation at a given normal stress. The test can be made on all soil materials and undisturbed, remolded or compacted materials. There is however, a limitation on maximum particle size. Sample displacement during testing may range from 10 to 20 percent of the specimen's original diameter or length.

The sample's initial void ratio, water content, dry unit weight, degree of saturation based on the specific gravity, and mass of the total specimen may also be computed. The shear test results are plotted on the attached shear test diagrams and unless otherwise noted on the shear test diagram, all tests are performed on undisturbed, saturated samples.

Lots 14-17 of Lake Shore Drive, Lake Elsinore, California

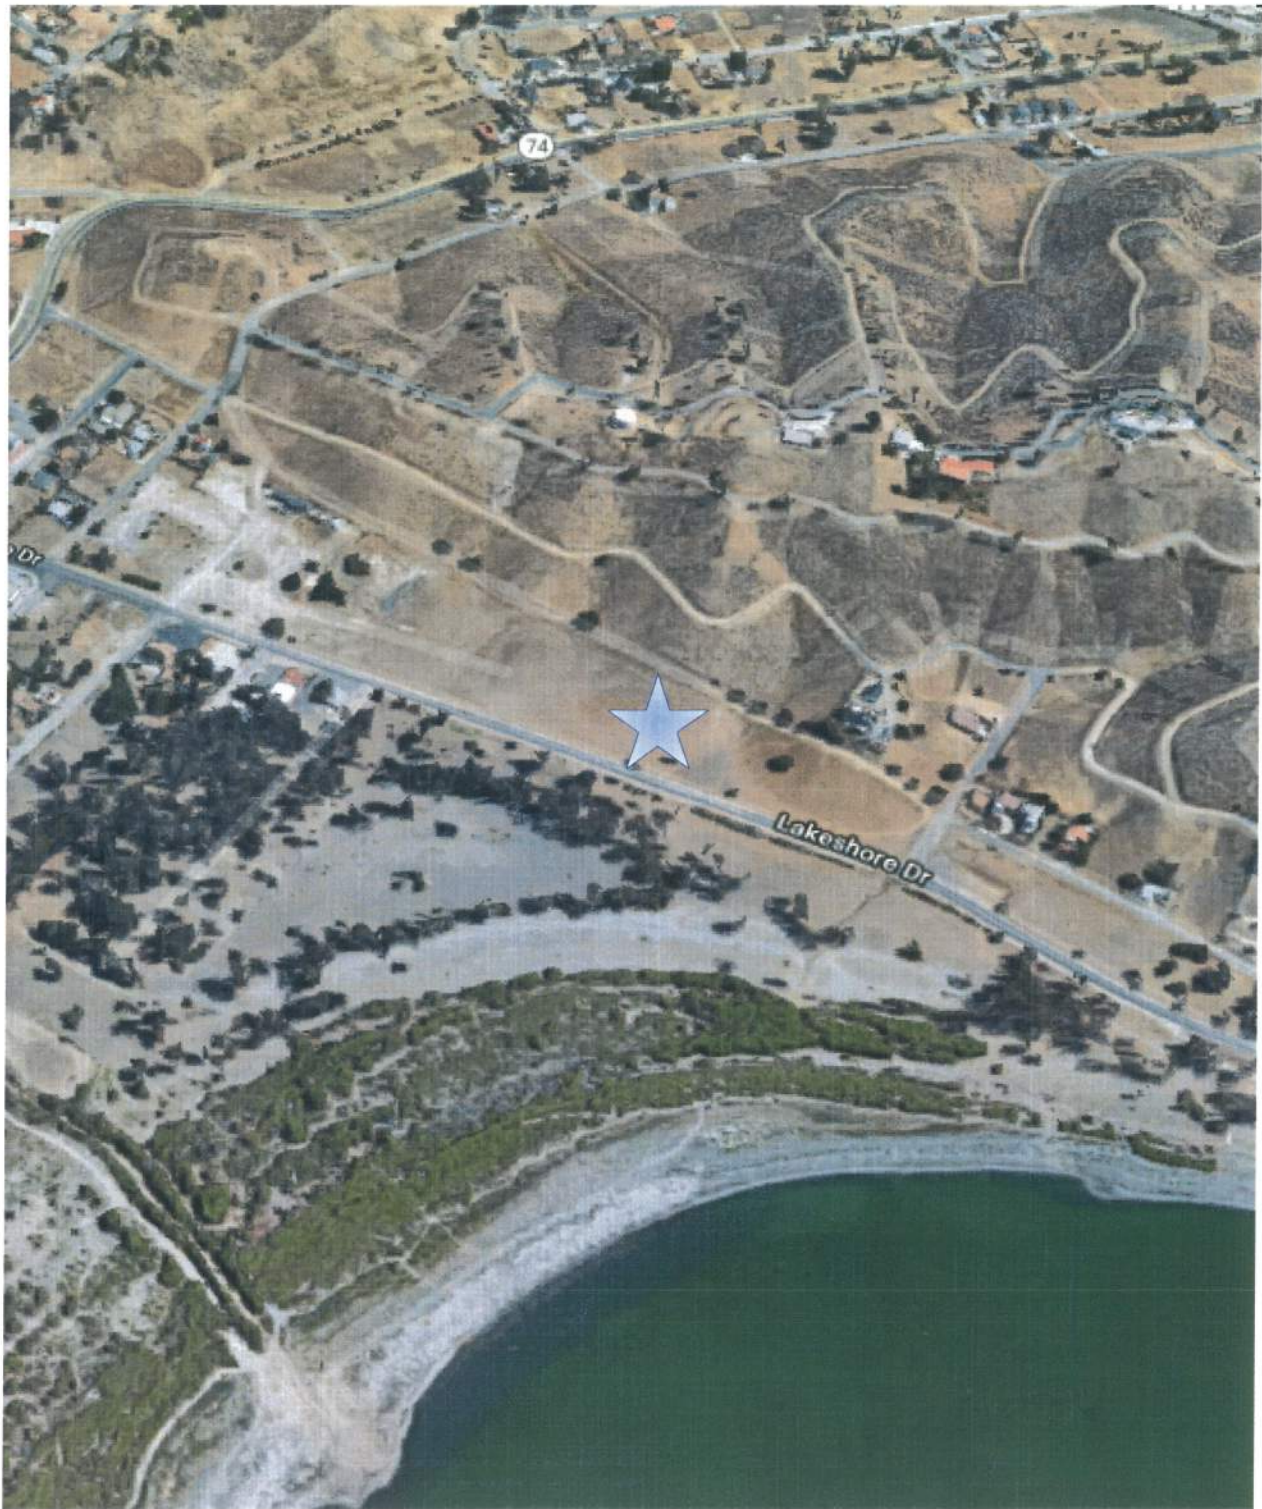


Fig. 1: Site aerial photo.

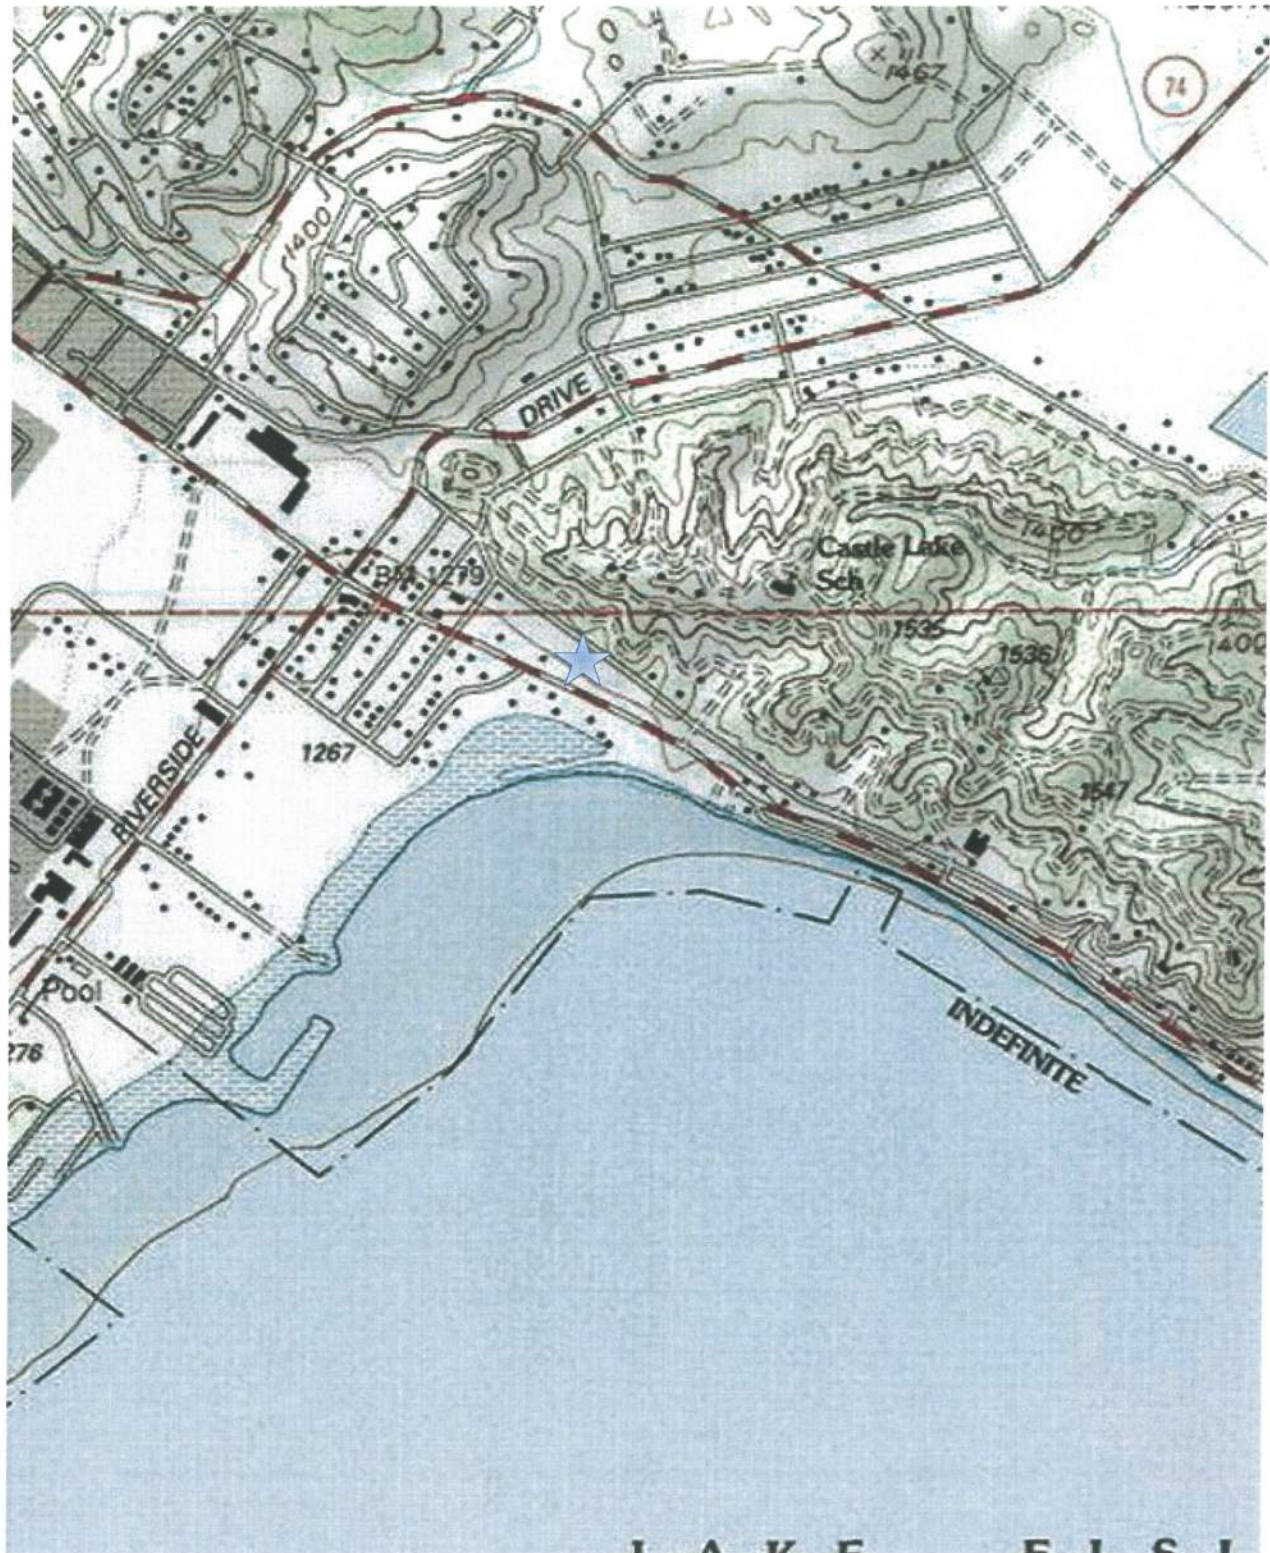


Figure 2: Site Topographic Map (USGS AAGS)

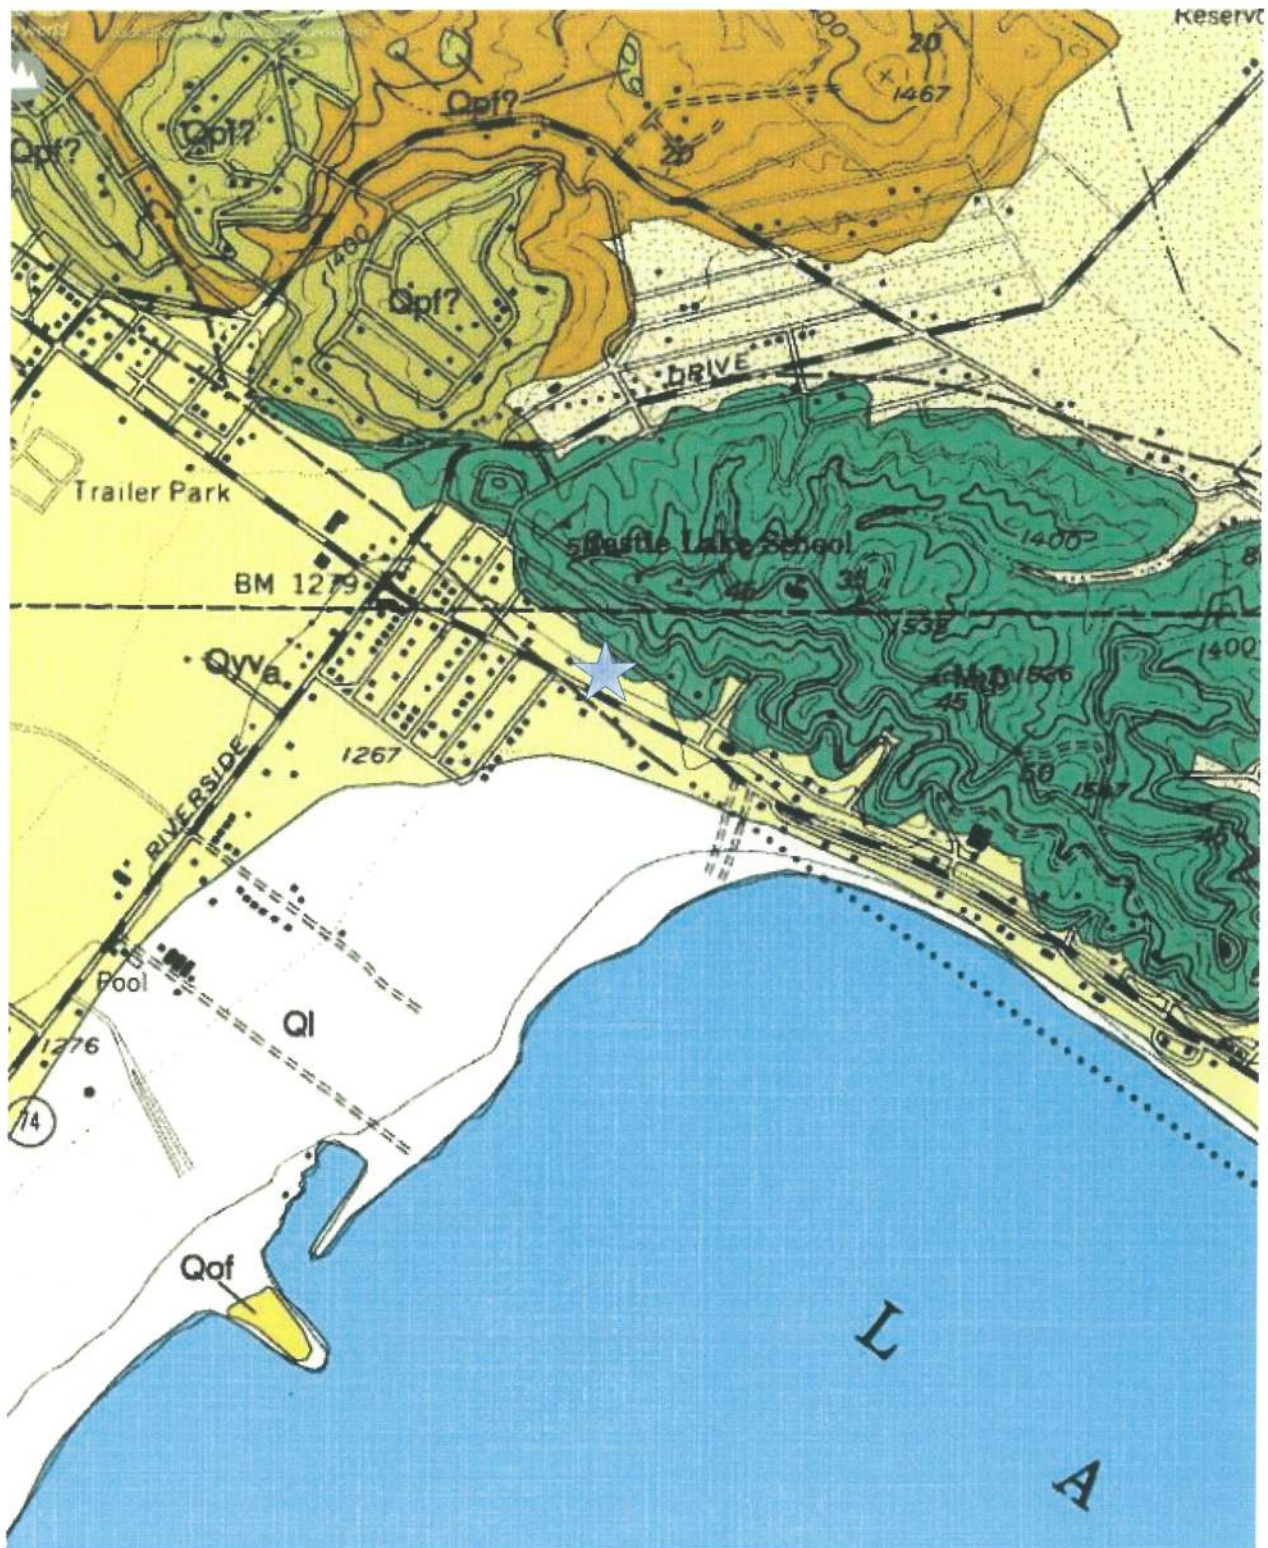


Figure 3: Site geological map.

Section 2.0 Conclusions

The proposed construction is considered feasible from a soils engineering standpoint. All earthwork should be performed in accordance with applicable engineering recommendations presented herein or applicable Agency Codes, whichever are the most stringent.

2.1 Site Condition

Based on the "Topographic Plan" outline, slopes of the ribs are inclined between 3.0:1 (horizontal to vertical) and 3.5:1; with the slope through the southwesterly part of the parcel inclined between 8.0:1 and 14.0:1. A southwest descending drainage course, from Ryan Ave. to Lakeshore Dr., crosses the parcel at about mid -point. An undocumented artificial fill has been constructed to provide access of Ryan Ave. across the drainage, with a culvert being installed through the fill to allow draining waters to pass.

2.2 Regional Geology

The subject parcel is in the northern part of the Peninsular Range Province. Morton, D.M. and Weber, F.H., 1998, "Geologic Map of the Elsinore 7.5' Quadrangle, Riverside County, California, USGS Open-File Report 03-281", indicates the northern part of the subject parcel is underlain by Mesozoic age (Mzp) black and fissile phyllite with foliation planes striking to the northeast and dipping moderately to the southeast. The Morton map identifies that the southern part of the parcel is underlain by Holocene to Late Pleistocene age (Qyva), sand, silt, and clay unconsolidated, alluvial deposits.

Morton and Weber mapping places the Glen Ivy and Willard Faults, both with Quaternary activity, at 500 feet southwest and 1.5 miles southwest, respectively, of the subject parcel. CDMG, 1975, "Fault Map of California" locates traces of the San Jacinto and San Andreas Faults (both having Holocene displacements) being, respectively, 20.2 and 33.3 miles northeast of the parcel; The CDMG map places the Banning and Newport-Inglewood Faults (both with Quaternary displacements), respectively, at 27.4 miles northeast and 26.8 miles southwest of the site. Additionally, the CDMG map plots thermal springs at Lakeshore Drive 1.1 miles southeast of the parcel.

2.3 Site Geology

Our Engineering Geologist has utilized the following sources of information to establish the geologic conditions at the subject property: the geologic map by Morton and Weber, referenced above; Google Earth air photos; CDMG and CGS publications; the "Geotechnical Plan", referenced above; and reconnaissance mapping of exposures, and logging of five (5) borings, when accompanying Soil Pacific for the site investigation on 29 January 2019.

Please refer to plt plan A-1-1 and four cross section A-A', B-B', C-C' and D-D' developed across the site arbitrarily to show the position of the bedrock throughout the site, proposed development and position of proposed building after the site grading.

Four geologic units are exposed, encountered in the borings, and mappable on the subject parcel: (Qaf); alluvium and colluvium (Qal/Qcol) – which is correlative with Morton's alluvium (Qyva); a phyllite, or slate, bedrock (Mzp); and an igneous bedrock (Khg).

Artificial fill

Artificial fill (Qaf) is located at the drainage course, and in the upper part of borings B-1 and B-4, along Ryan Ave. The toe of the fill at the drainage course, and culvert, on the south side of the dirt road, may encroach on the parcel.

Alluvium

The alluvium and colluvium (Qal/Qcol) are found in the western and southwestern parts of the parcel; and were encountered in borings B-3, -4 and, -5. In B -3 and -4, the alluvium is a clay (cl) of five (5) and three (3) feet thickness, respectively. With B-5, a clay (cl) alluvium is found between ground surface and 15 feet below ground surface (bgs); and between 15 and 20 feet bgs the alluvium is a clayey gravel (gc).

Bedrock

The phyllite/slate bedrock (Mzp) is exposed in cuts and encountered in the borings along Ryan Ave.; and in boring B-4. The cuts provided measurements of the foliation planes striking between N. 66- and 75-degrees E. with moderate to steep dips to the southeast – these attitudes being conformable to the Morton mapping. In the borings B-1, B-3, and B-4, the phyllite underlies the artificial fill, alluvium, or colluvium; in B-2, the phyllite is found at ground surface. Additionally, in borings B-1 through B-3, the phyllite can be mapped as weathered, slightly weathered, or relatively fresh (refer to cross section A-A').

At boring B-5, a highly weathered/decomposed, igneous granitic bedrock was encountered underlying the alluvial deposits. This unit is most probable correlative with Morton's Cretaceous age granitics (Khg) that crop out near the subject parcel.

Considering the mappable condition of the phyllite bedrock (Mzp) through the parcel, and without additional site-specific, subsurface information, the contact between the phyllite (Mzp) and igneous (Khg) bedrock is interpreted to be a nonconformity.

2.4 Foundations

All newly designed isolated pad or continuous foundation must be embedded into firm and approved bedrock formation in order to avoid a cut and fill transition.

2.5 Bearing Materials

The existing alluvial soils were discovered by exploring with test pit were mainly porous and or subject to settlement by time. These materials are not an appropriate bearing materials. Therefore, proper site grading, engineering and construction of buttress may be required. As an alternative pile foundation may be designed to support the proposed building.

2.6 Groundwater

The site is located within the buffer zone of Lakeshore Valley Basin (California Department of Water Resources, [CDWR], 2018). Groundwater depth varies within the area and flow direction beneath the subject site is toward the south-southwest. No groundwater wells were listed on the property; however, several groundwater wells are listed in the site vicinity.

During our investigation, groundwater was not encountered within 10 feet of sub-surface exploration below the existing grade. The depth of groundwater may fluctuate depending upon the time and period of the year.

2.7 CBC Seismic Design Parameters

Earthquake loads on earthen structures and buildings are a function of ground acceleration, which may be determined from the site-specific acceleration response spectrum. To provide the design team with the parameters necessary to construct the site-specific acceleration response spectrum for this project, we used two computer applications that are available on the United States Geological Survey (USGS) website, <http://geohazards.usgs.gov/>.

Specifically, the Design Maps website <http://geohazards.usgs.gov/designmaps/us/application.php> was used to calculate the ground motion parameters. 2008 PSHA Interactive Deaggregation website <http://geohazards.usgs.gov/deaggint/2008/> can be used to determine the appropriate earthquake magnitude if specific design is required.

The printout attached in Appendix C provides parameters required to construct the site-specific acceleration response spectrum based on the 2016 CBC guidelines.

It should be noted that the subject property is not in an Alquist-Priolo Earthquake Fault Zones; nor are any faults mapped, or inferred, through the property. CGS, 2016, "Earthquake Shaking Potential for California, Map Sheet 48", suggest the degree of ground shaking at the property, due to

earthquakes, will 60% to > 70% of gravity; but the degree of shaking at the site will be no greater than shaking at neighboring properties.

2.8 Chemical Contents

Chemical testing for detection of hydrocarbon or other potential contamination is beyond the scope of this report.

2.9 Liquefaction Study/ Secondary Seismic Hazard Zonation

Subject site is underlain by firm and dense bedrock and the potential for Liquefaction susceptibility is null. Liquefaction occurs when seismically-induced dynamic loading of a saturated sand or silt causes pore water pressures to increase to levels where grain-to-grain contact pressure is significantly decreased and the soil material temporarily behaves as a viscous fluid. Liquefaction can cause settlement of the ground surface, settlement and tilting of engineered structures, flotation of buoyant buried structures and fissuring of the ground surface. A common manifestation of liquefaction is the formation of sand boils (short-lived fountains of soil and water emerges from fissures or vents and leave freshly deposited conical mounds of sand or silt on the ground surface). Lateral spreading can also occur when liquefaction occurs adjacent to a free face such as a slope or stream embankment.

The types of seismically induced flooding that may be considered as potential hazards to a particular site normally includes flooding due to a tsunami (seismic sea wave), a seiche, or failure of a major reservoir or other water retention structure upstream of the site. Since the site has an average elevation of approximately 200 feet above sea level, and since it does not lie in close proximity to an enclosed body of water, the probability of flooding from a tsunami or seiche is considered to be low. In addition, the site is not located within a designated tsunami inundation area.

Section 3.0 Recommendations

Based on our exploration, and experience with similar projects, the proposed construction is considered feasible from a soils engineering standpoint providing the following recommendations are made part of the plans and are implemented during construction.

3.1 Clearing and Site Preparation

Site grading is anticipated and is proposed. The following typical recommendations can be used by the project civil engineer in charge of grading plan preparation.

1. The areas to receive compacted fill should be stripped of all vegetation, construction debris and trashes, non engineered fill, left in place incompetent material up to approved soils. If soft spots are encountered, a project soil engineer will evaluate the site conditions and will provide necessary recommendations.
2. The excavated areas bottom should be scarified to a minimum of 8 inches, adjusted to optimum moisture content, and reworked to achieve a minimum of 90 percent relative compaction. Overexcavation within equal to depth of excavation or 5 feet. Excavation against adjacent buildings or public way require shoring or slot cut method.
3. Compacted fill should extend at least 5 feet beyond all perimeter footings or to a distance equal to the depth of the certified compacted fill, whichever is the greatest and feasible.
4. Compacted fill, consisting of on-site soil shall be placed in lifts not exceeding 6 inches in uncompacted thickness. The excavated onsite materials are considered satisfactory for reuse in the fill if the moisture content is near optimum. All organic material and construction debris should be removed and shall be segregated. Any imported fill should be observed, tested, and approved by the soils engineer prior to use as fill. Rocks larger than 6 inches in diameter should not be used in the fill.
5. The fill should be compacted to at least 90 percent of the maximum dry density for the material. The maximum density should be determined by ASTM Test Designation D 1557-00.
6. Field observation and compaction testing during the grading should be performed by a representative of Soil Pacific Inc. to assist the contractor in obtaining the required degree of compaction and the proper moisture content. Where compaction is less than required, additional compaction effort should be made with adjustment of the moisture content, as necessary, until a minimum of 90 percent relative compaction is obtained.

3.2 Site Preparation and Excavations

If any unanticipated subsurface improvements (pipe lines, irrigation lines, etc.) are encountered during earthwork construction, this office should be informed and appropriate remedial recommendations would subsequently be provided. During earthwork construction, all remedial removals, and the general grading and construction procedures of the contractor should be observed, and the fill selectively tested by a representative of this office. If unusual or unexpected conditions are exposed in the field, they should be reviewed by this office and if warranted, additional recommendations will be offered.

3.3 Stability of Temporary Cuts

The stability of temporary cuts required during the removal process depends on many factors, including the slope angle, the shearing strength of the underlying materials, the height of the cut, and the length of time the excavation remains open and exposed to equipment vibrations and rainfall. The geotechnical consultant should be present to observe all temporary excavations at the site. The possibility of temporary excavations failing may be minimized by:

- 1) keeping the time between cutting and filling operations to a minimum;
- 2) limiting excavation length exposed at any one time; and,
- 3) cutting no steeper than a 1: 1 (h:v) inclination for cuts in excess of 4 feet in height.
- 4) or shoring prior to cut.

Any southwest, or southeast, - facing excavation in the phyllite bedrock (Mzp) will undercut an apparent dip of the unit's foliation planes. Any excavation steeper than 2:1 in artificial fill (Qaf), alluvium/colluvium (Qal/Qcol), or weathered phyllite bedrock (Mzp) will leave these units unsupported, and subject to possible failure. Therefore any unsupported cut, grading must be shored prior to excavation.

3.4 Foundations

The following recommendations may be used in preparation of the design and construction of the foundation system.

3.4.1 Bearing Value

The allowable bearing value for conventional footings, having a minimum width of 18 inches and a minimum embedment of 24 inches embedded into approved competent soils should not exceed 3000 pounds per square foot. This value may be increased by one-third for short duration (wind or seismic) loading.

3.4.2 Isolated Square Pad Footings

The proposed structure can be adequately supported by shallow spread footing or isolated footings. The minimum embedment for individual pad footings should be 24 inches below the approved materials. Allowable bearing value is 3000 psf to a maximum of 6000 psf. The bearing value may be increased by 1/3 when considering short duration seismic or wind loads.

3.4.3 Foundation Settlement

Based upon anticipated structural loads, the total settlement for the proposed foundation is not expected to exceed 1 inch at design load. Differential settlement between adjacent footings and lateral displacement of lateral resisting elements should not exceed .5 inch.

3.4.4 Concrete Type

In lack of soluble sulfate test, Type V concrete should be used.

3.4.5 Slabs-on-grade

1) Residential floor slabs cast on-grade may be used for the interior of the residence and shall be at least four inches (4") in thickness, superseding the presumptive minimum set forth in 2016 CBC, Section 1907.1. All concrete shall be designed in accordance with ACI 318 and placed in accordance with ACI 302. If desired, to minimize the risk of shrinkage cracking and/or vapor transmission, the use of concrete with a water-cement ratio of less than 0.5 by weight, a one-inch top-sized aggregate, and/or a minimum compressive strength of 4000 PSI may be considered.

2) As a minimum standard, all slabs shall be reinforced with number four (#4) bars, sixteen inches (16") on center in both directions. Notwithstanding the minimum reinforcement prescribed herein, the Project Structural Engineer shall design all slabs in full accordance with requirements and procedures contained within appropriate design standard. Care should be taken by the contractor to ensure that the steel reinforcement is cast near the center of the slab and/or in accordance with the recommendations of the Project Structural Engineer.

3) All slabs shall be underlain by at least four inches (4") crushed rock per Calgreen with a minimum 15-mil polyolefin membrane vapor barrier placed below all living areas, superseding the presumptive minimum set forth in 2016 CBC, Section 1907.1. It is recommended that the specific vapor barrier used conform to the specifications of ASTM E1745 (such as Stego Wrap or similar) and be placed in full conformance with the manufacturer's installation guidelines. The engagement of a qualified expert in the mitigation of moisture vapor transmission for the design of the slab foundation system is recommended.

4) In accordance with 2016 CBC Section 1808.7.4, to reduce the risk of interior flooding the top of all slab-foundations shall extend a minimum of twelve inches (12") above the elevation of the adjacent drainage path. Reductions to this prescribed minimum elevation are subject to specific approval of the local Building Authority.

3.4.6 Pile Foundation

Shoring Piles

For shoring purposes, drilled cast-in-place soldier piles or I beams should be placed at 8 feet on center along the edge of the top of the slope. The minimum diameter of the piles is 18 inches. For design purposes, an allowable passive value for the soils below the bottom plane of excavation, may be assumed to be 500 pounds per square foot per foot of depth, up to a maximum of 5,000 pounds per square foot. In order to control the anticipated deflection of the piles the shoring piles may be braced by two row of rakers per structural engineer justification if deemed necessary

The frictional resistance between the soldier piles and retained soil may be used to resist the vertical component of the anchor load. The coefficient of friction may be taken as 0.4, based on uniform contact between the concrete and retained earth. The portion of soldier piles below the plane of excavation may also be employed to resist the downward loads. Pile or I beams should have a minimum of same depth of embedment into the ground below the lowest excavation grade. The combined static and seismic active will be applied in design criteria. The seismic pressure may be assumed to be in order of 40 pcf for all piles having 30-40 feet in height. Seismic pressure of 40 pcf will be added for any pile having 6 feet or higher. Pile should be designed for static pressure of 42 pcf.

Lagging

Lagging between soldier piles could be omitted within the cohesive soils. In the less cohesive soils, such as the sands and gravels, lagging would be necessary. It is recommended that the exposed soils be observed by the soils engineer to verify the cohesive nature of the soils and the area where lagging may be omitted.

Soldier piles and anchors should be designed for the full anticipated pressures. Due to arching in the soils, the pressure on the lagging will be somewhat less. It is recommended that the lagging be designed for the full design pressure but be limited to a maximum of 400 pounds per square foot. Water should not be allowed to pond on top of the excavation nor to flow towards it.

3.5 Utility Trench Backfill

Utility trenches backfill should be placed in accordance with Appendix D. It is the owners' and contractors' responsibility to inform subcontractors of these requirements and to notify Soil Pacific Inc when backfill placement is to begin.

3.6 Seismic Design and Construction

Construction should be in conformance with seismic design parameters of the latest edition of California Building Code (C.B.C.). Please refer to the Appendix C for closest faults and other related seismic design parameters.

3.7 Surface and Sub-surface Drainage Provisions

Proper surface drainage gradients are helpful in conveying water away from foundations and other improvements. Subsurface drainage provisions are considered essential in order to reduce pore-pressure build-up behind retaining structures. Ponding of water enhances infiltration of water into the local soils, and should not be allowed anywhere on the pad.

3.8 Conventional Retaining Wall

Retaining wall is not proposed or planned. If a conventional retaining wall is planned, the following design criteria may be used:

- 1) Where a free standing structure is proposed, a minimum equivalent fluid pressure, for lateral soil loads, of 40 pounds per cubic foot, may be used as design for onsite non-expansive granular soils conditions and level backfill (10:1 or less). If the wall is restrained against free movement ($= \pm 1\%$ of wall height) then the wall should be designed for lateral soil loads approaching the at-rest condition. Thus, for restrained conditions, the above value should be increased to 80 pcf. In addition, all retaining structures should include the appropriate allowances for any anticipated surcharge loads.
- 2) An allowable soil bearing pressure of 3000 lbs. per square foot may be used in design for footings embedded to a minimum of 24 inches below the lowest adjacent competent grade.
- 3) A friction coefficient of 0.40 between concrete and natural or compacted soil and a passive bearing value of 500 lbs. per square foot per foot of depth, up to a maximum of 5,000 pounds per square foot at the bottom excavation level may be employed to resist lateral loads.

Back drain system will consist of a free-draining material made up of at least 1 cubic foot of 3/4-inch crushed rock/gravel around pipe drains. If an open space greater than 1 foot exists between the back of the wall and the soil face, gravel backfill should be compacted by vibration. An impervious soil cap should be provided at the top of the wall backfill to prevent infiltration of surface water into the

Lots 14-17 of Lake Shore Drive, Lake Elsinore, California

back drain system. The cap may be a combination of concrete and/or compacted fine grained soils. The compacted backfill soil cap should be at least 1 foot thick when used in conjunction with a concrete slab type cap and at least 2 feet thick when used exclusively.

Any surcharges such as traffic and adjacent building loads shall be computed and adhered into the design by the structural engineer justification.

3.9 Concrete Driveway

1. The subgrade soils for all flatwork should be checked to have a minimum moisture content of 2 percentage points above the optimum moisture content to a depth of at least 18 inches.
2. Local irrigation and drainage should be diverted from all flatwork areas. Area drains and swales should be utilized to reduce the amount of subsurface water intrusion beneath the foundation and flatwork areas. Planter boxes adjacent to buildings should be sealed on the bottom and edges to retard intrusion of water beneath the structure.
3. The concrete flatwork should have enough cold joints to prevent cracking. Adequate reinforcement considering the expansion potential is required. A minimum of rebar no. 3 placed at 18 inches on center must be used.
4. Surface and shrinkage cracking of the finished slab may be significantly reduced if a low slump and water-cement ratio is maintained during concrete placement. Excessive water added to concrete prior to placement is likely to cause shrinkage cracking.
5. Construction joints and saw cuts should be designed and implemented by the concrete contractor or design engineer based on the medium expansive soil conditions. Maximum joint spacing should not exceed 8 feet in any direction.
6. Patio or driveway subgrade soil should be compacted to a minimum of 90 percent to a depth of 18 inches. All run-off should be gathered in gutters and conducted off site in a non-erosive manner. Planters located adjacent to footings should be sealed and leach water intercepted.

3.10 Storm Water Management

On-site sheet water can be infiltrate within an area along the Lakeshore Drive where the tick alluvial deposit is identified. The infiltration rate of 5 inches per hour can be used to disburse the sheet water.

3.11 Observation and Testing

It is recommended that **Soil Pacific Inc.** be present to observe and test during the following stages of construction:

Project No. A-6749-18

Page: 20

Lots 14-17 of Lake Shore Drive, Lake Elsinore, California

- ☐ Site grading to confirm proper removal of unsuitable materials and to observe and test the placement of fill.
- ☐ Inspection of all foundation excavations prior to placement of steel or concrete.
- ☐ During the placement of retaining wall sub-drain and backfill materials.
- ☐ Inspection of all slab-on-grade areas prior to placement of sand, Visqueen.
- ☐ After trenches have been properly backfilled and compacted.
- ☐ When any unusual conditions are encountered.

APPENDIX A

Field Exploration


RECORD OF SUBSURFACE**TEST PIT NO. TP-1**

Date: 10/6/18

Logged by: A.Sh.

Equipment: Backhoe

Elev.	USCS	Moist %	Dry Dens. pcf	Depth feet	Description of Earth Materials
	SM	2.2	92.1	1	Brown, dark brown fine to pebbly clastes and bedrock fragment, with clayey matrix, porous and loose when get wet. top soil/slope wash. Redish brown coarse grained to pebelly clasts, slightly porous, native/ Qcol.
	SM	4.0	98.8	3	
				5	
	SM			7	
				9	
				11	End of subsurface exploration 6 feet. Test pit backfilled.
				13	

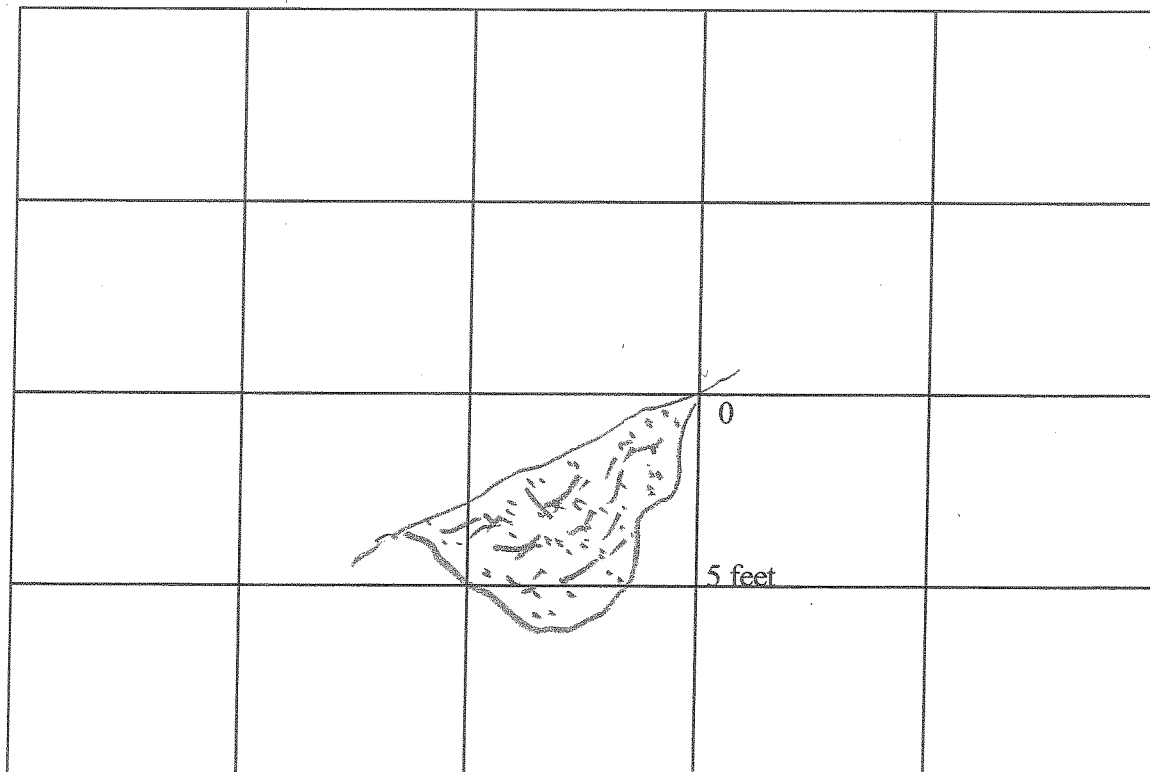**CROSS SECTION SKETCH**

Scale: 1"= 5 feet

Trench Orientation: N-S

SOIL PACIFIC INC.Geotechnical and
Environmental
Services

Project Name: Lot 14-17 of Lakeshore Drive, Lake Elsinore

Project Number: A-6649-18

Figure:

RECORD OF SUBSURFACE


TEST PIT NO. TP-2

Date: 10/6/18

Logged by: A.Sh.

Equipment: Backhoe

Elev.	USCS	Moist %	Dry Dens. pcf	Depth feet	Description of Earth Materials
	SM			1	Brown, dark brown fine to pebbly clastes and bedrock fragment, with clayey matrix, porous and loose when get wet.
	SM			3	top soil/slope wash.
	SM			5	Redish brown coarse grained to pebbly clasts, slightly porous, native/ Qcol.
				7	Redish brown, fine to coarse garined silty sand with some clay and scattered clastes and some larger pebbles, moderately dense.
				9	
				11	At 10 feet fine to coarse grained clayey sand, damp.
				13	
					End of subsurface exploration 10 feet. Test pit backfilled.

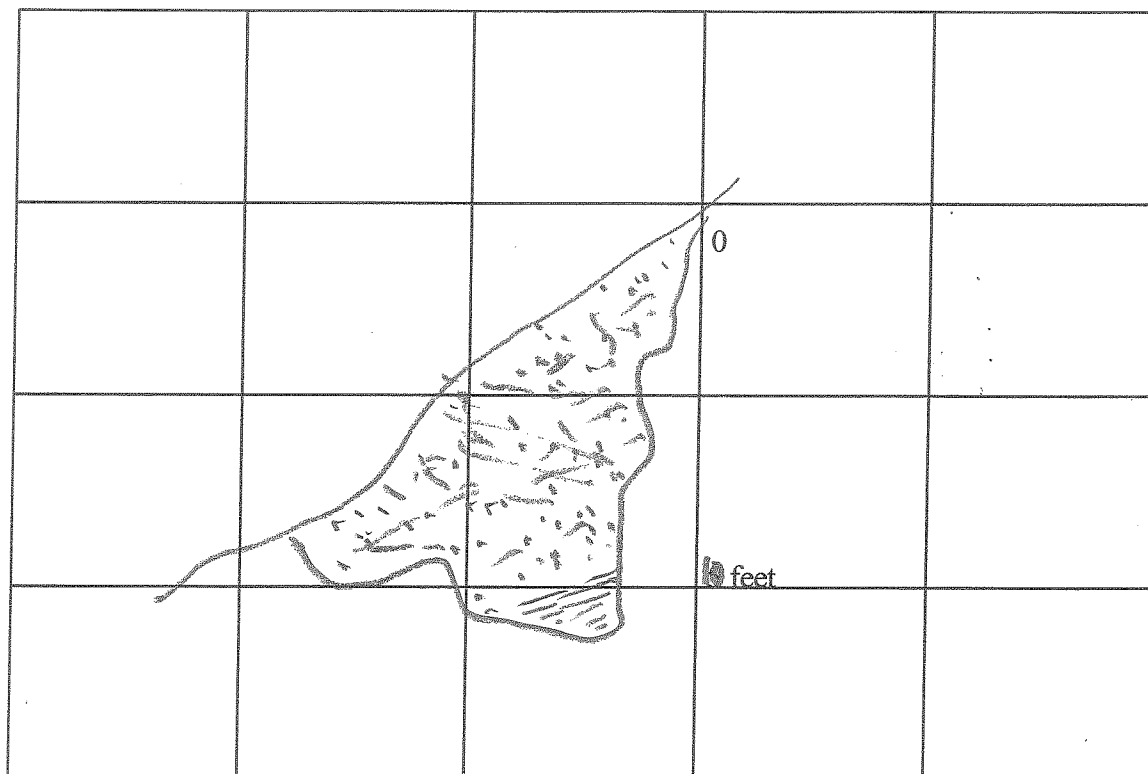

CROSS SECTION SKETCH

Scale: 1"= 5 feet

Trench Orientation: N-S

SOIL PACIFIC INC.
Geotechnical and
Environmental
Services

Project Name: Lot 14-17 of Lakeshore Drive, Lake Elsinore

Project Number: A-6649-18

Figure:

RECORD OF SUBSURFACE


TEST PIT NO. TP-3

Date: 10/6/18

Logged by: A.Sh.

Equipment: Backhoe

Elev.	USCS	Moist %	Dry Dens. pcf	Depth feet	Description of Earth Materials
	SM			1	Brown, dark brown fine to pebbly clastes and bedrock fragment, with clayey matrix, porous and loose when get wet. top soil/slope wash.
	SM			3	
	SM			5	Redish brown coarse grained to pebbly clasts, slightly porous, native/ Qcol.
				7	Redish brown, fine to coarse grained silty sand with some clay and scattered clastes and some larger pebbles, moderately dense.
				9	
	Bedrock			11	At 9 feet gray, dark gray hard siliceous bedrock. refusal to explore deeper.
				13	End of subsurface exploration 9 feet. Test pit backfilled.

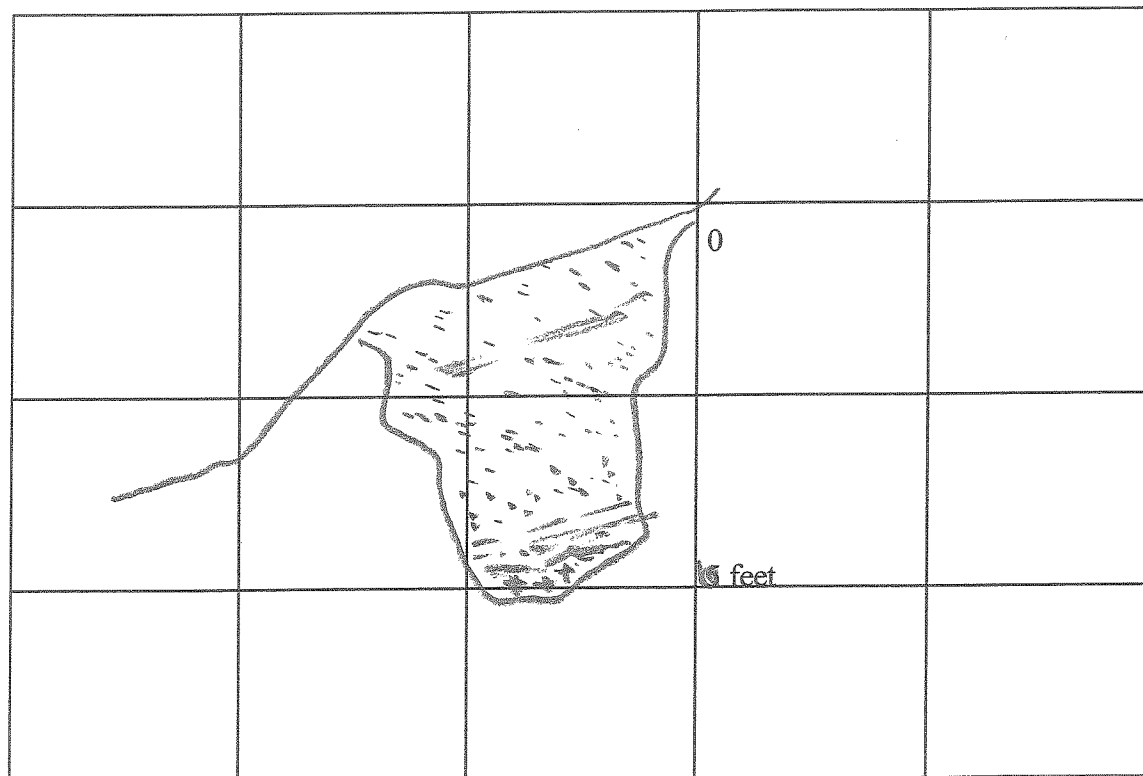

CROSS SECTION SKETCH

Scale: 1"= 5 feet

Trench Orientation: N-S

SOIL PACIFIC INC.

Geotechnical and
Environmental
Services

Project Name: Lot 14-17 of Lakeshore Drive, Lake Elsinore

Project Number: A-6649-18

Figure:

RECORD OF SUBSURFACE


TEST PIT NO. TP-4

Date: 10/6/18

Logged by: A.Sh.

Equipment: Backhoe

Elev.	USCS	Moist %	Dry Dens. pcf	Depth feet	Description of Earth Materials
	SM			1	Brown, dark brown fine to pebbly clastes and bedrock fragment, with clayey matrix, porous and loose when get wet. top soil/slope wash.
	SM			3	
	SM	5.6	99.6	5	Redish brown coarse grained to pebbly clasts, slightly porous, native/ Qcol.
		8.9	98.3	7	Redish brown, fine to coarse garined silty sand with some clay and scattered clastes and some larger pebbles, moderately dense.
				9	
				11	
				13	End of subsurface exploration 7 feet. Test pit backfilled.

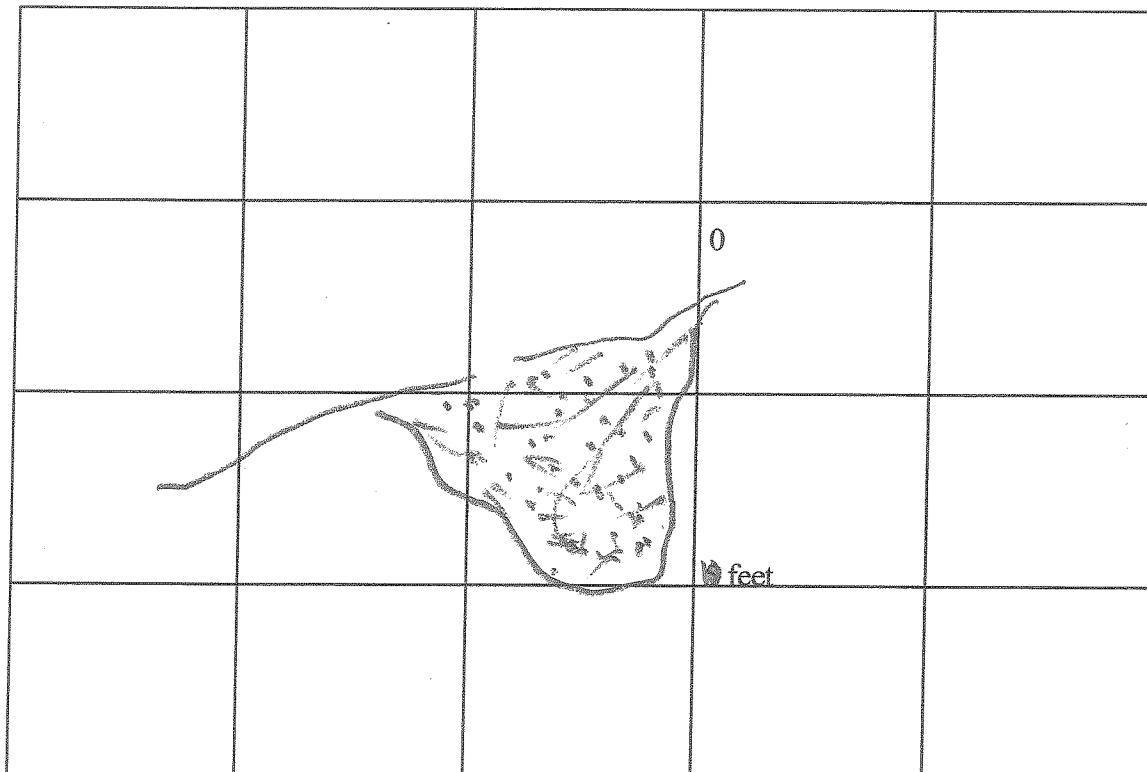

CROSS SECTION SKETCH

Scale: 1"= 5 feet

Trench Orientation: N-S

SOIL PACIFIC INC.

Geotechnical and
Environmental
Services

Project Name: Lot 14-17 of Lakeshore Drive, Lake Elsinore

Project Number: A-6649-18

Figure:

APPENDIX B


Laboratory

APPENDIX

SHEAR TEST DIAGRAM

J.O. A-6749-18

DATE 10/6/18

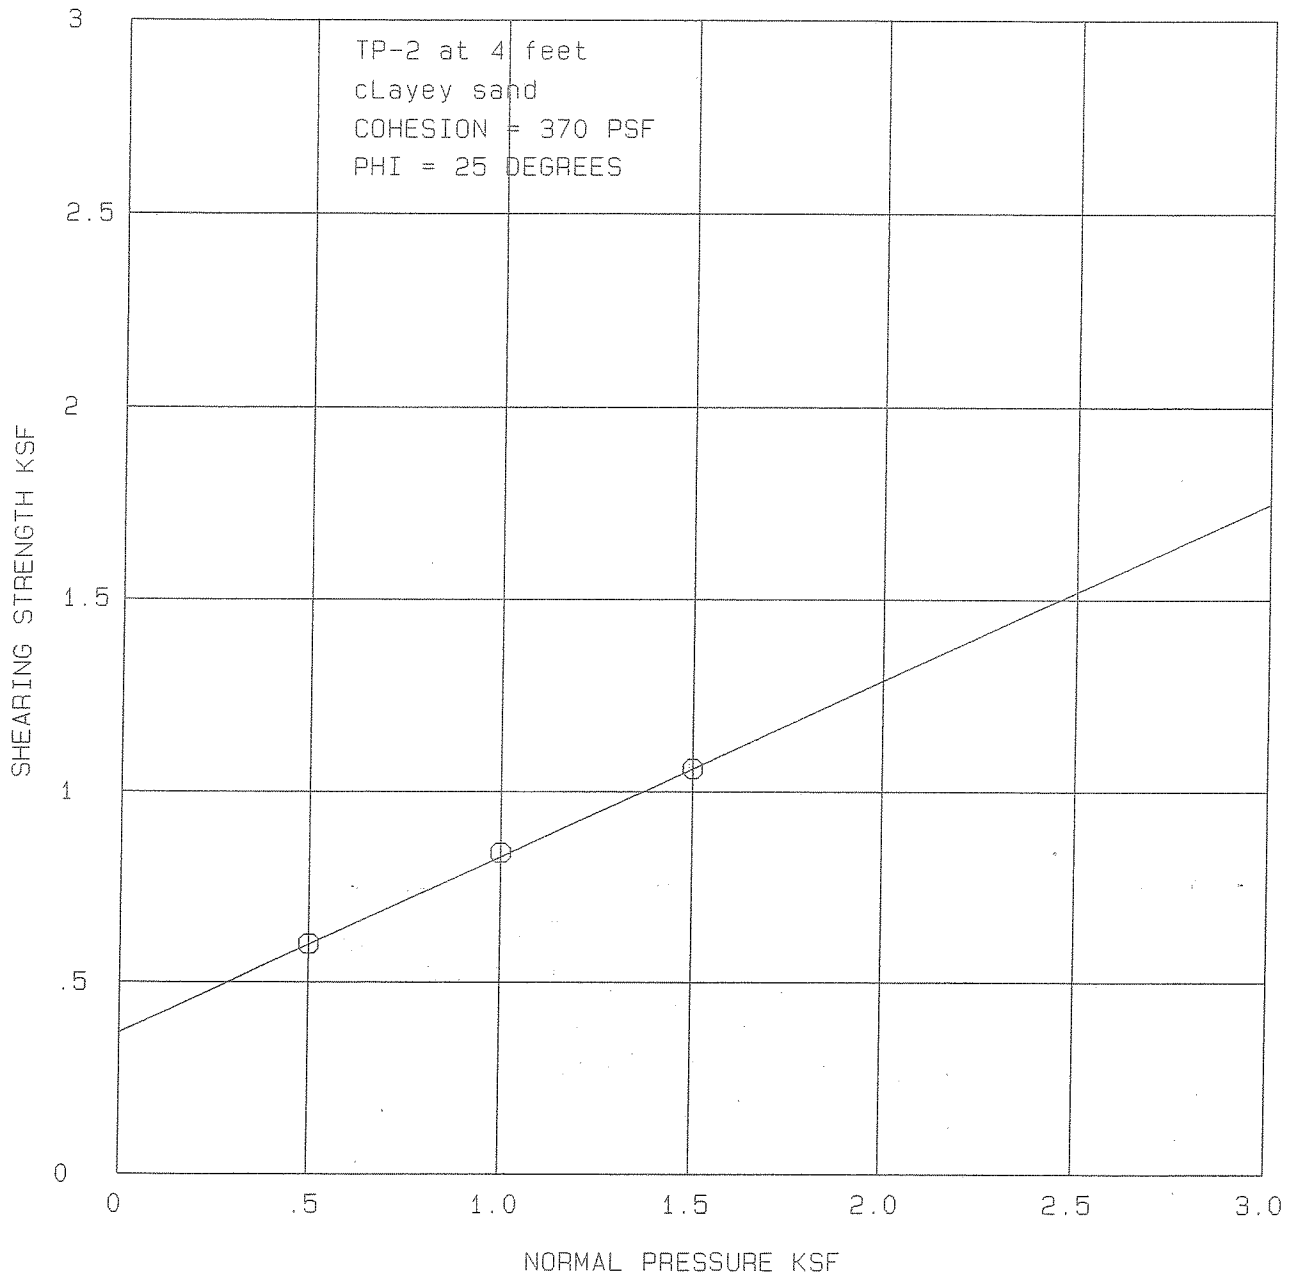


PLATE

APPENDIX

SHEAR TEST DIAGRAM

J.O. A-6749-18

DATE 10/6/18

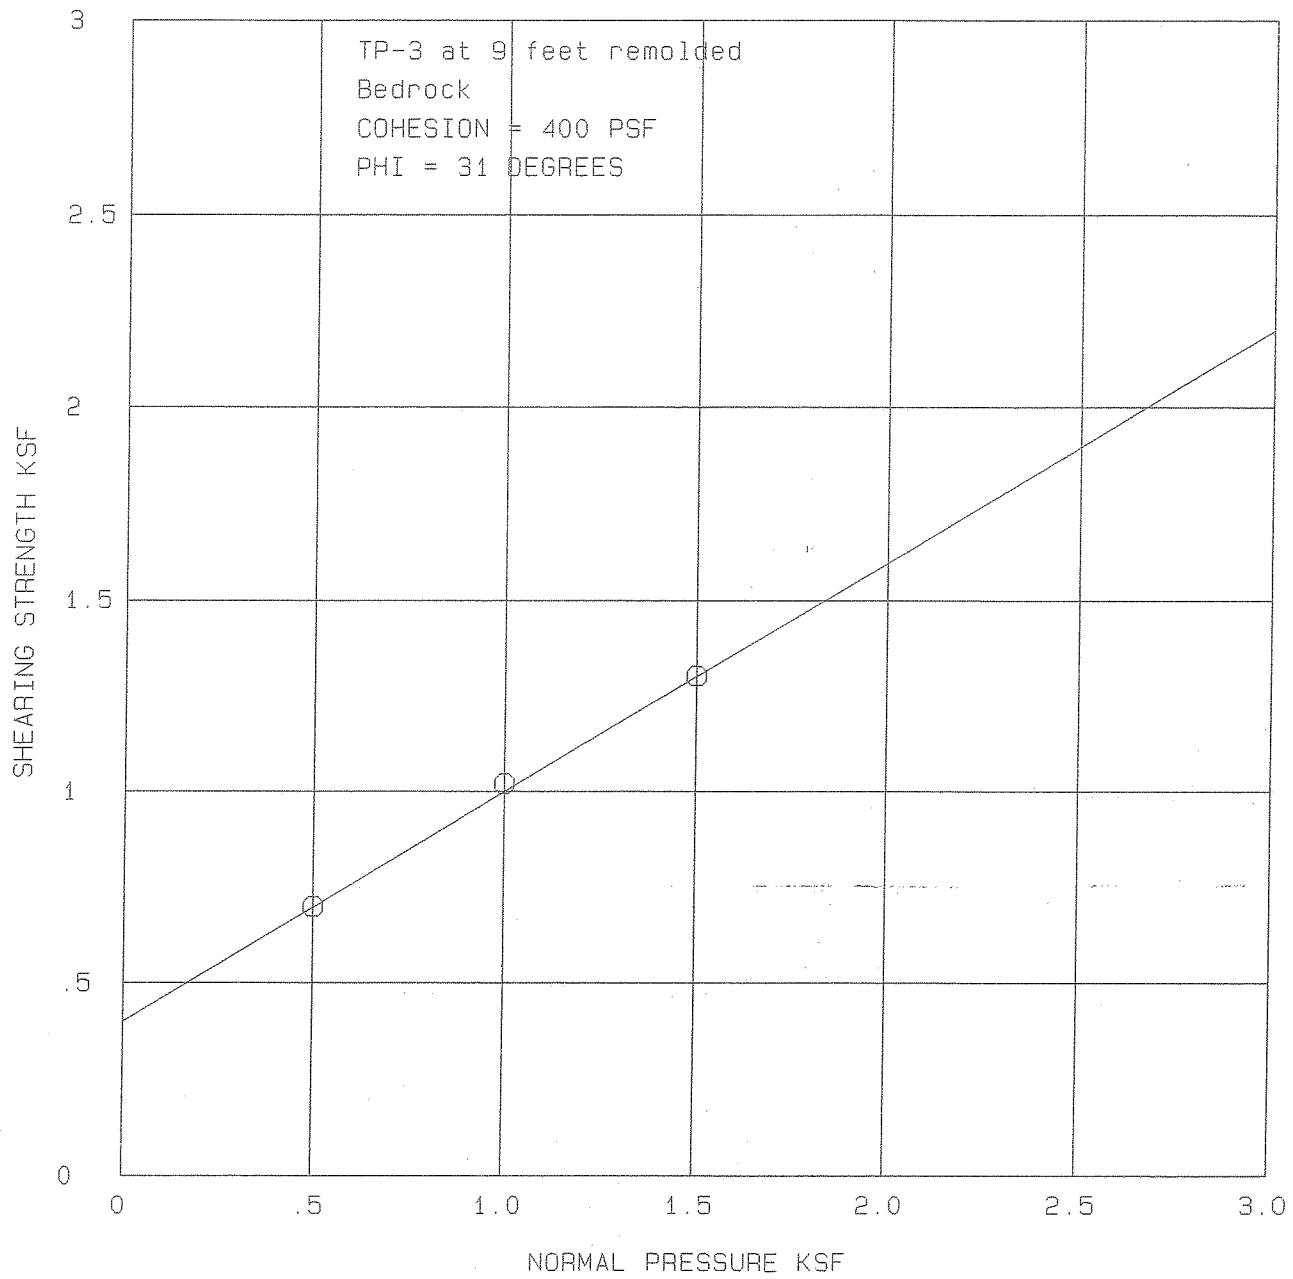


PLATE

APPENDIX

SHEAR TEST DIAGRAM

J.O. A-6749-18

DATE 10/6/18

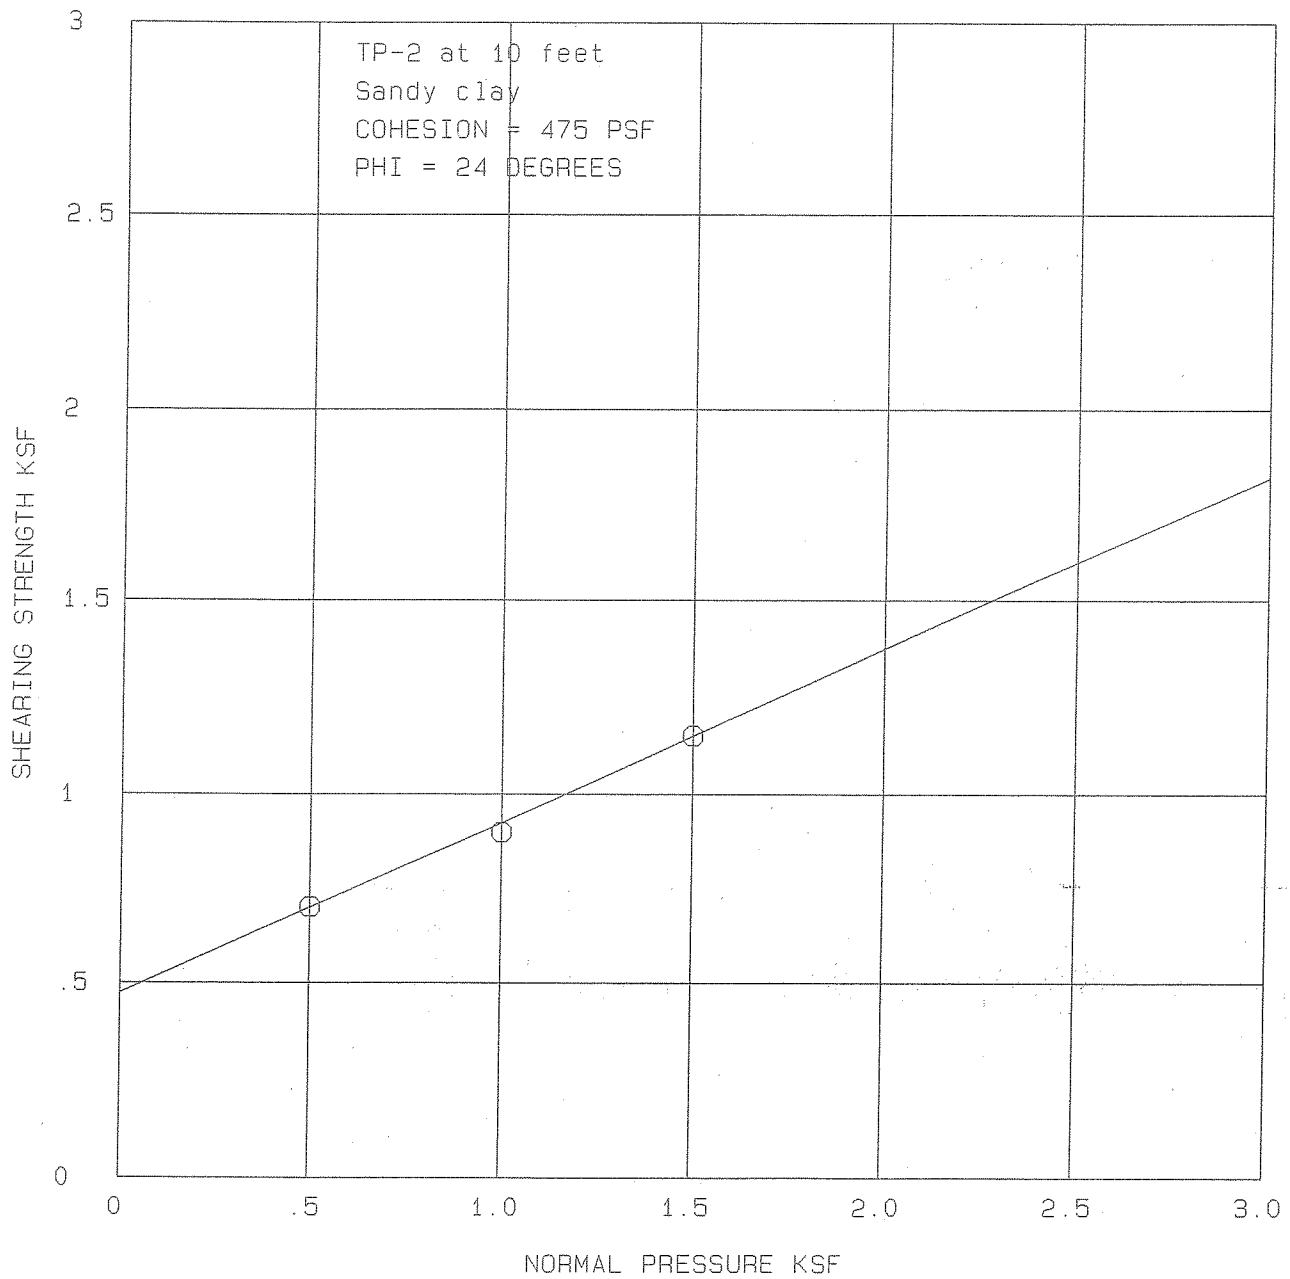

PLATE

APPENDIX

BEARING VALUE ANALYSIS

J.O. A-6749-18

DATE 10/6/18

COHESION = 400 PSF GAMA = 120 PCF PHI = 31 DEGREES

DEPTH OF FOOTING = 2 FEET

BREADTH OF FOOTING = 2 FEET

FOOTING TYPE = SQUARE

BEARING CAPACITY FACTORS		
Nc = 32.7	Nq = 20.6	Ng = 21.6
FOOTING COEFFICIENTS		
K1 = 1.2	K2 = .4	

REFERENCE: TERZAGHI & PECK, 1967, 'SOIL MECHANICS
IN ENGINEERING PRACTICE', PAGES 217 TO 225.

FORMULA

$$\text{ULTIMATE BEARING} = (K1 * Nc * C) + (K2 * GA * Ng * B) + (Nq * GA * D) = 22709.6$$

$$\text{ALLOWABLE BEARING} = \frac{\text{ULTIMATE BEARING}}{3} = 7569.9$$

THE ALLOWABLE BEARING VALUE SHOULD NOT EXCEED
7569.9 PSF. DESIGN SHOULD CONSIDER EXPANSION INDEX.

PLATE

APPENDIX

BEARING VALUE ANALYSIS

J.O. A-6749-18

DATE 10/6/18

COHESION = 400 PSF GAMA = 120 PCF PHI = 31 DEGREES

DEPTH OF FOOTING = 1.5 FEET

BREADTH OF FOOTING = 2 FEET

FOOTING TYPE = CONTINUOUS

BEARING CAPACITY FACTORS		
Nc = 32.7	Nq = 20.6	Ng = 21.6
FOOTING COEFFICIENTS		
K1 = 1	K2 = .5	

REFERENCE: TERZAGHI & PECK, 1967, 'SOIL MECHANICS
IN ENGINEERING PRACTICE', PAGES 217 TO 225.

FORMULA

$$\text{ULTIMATE BEARING} = (K1 * Nc * C) + (K2 * GA * Ng * B) + (Nq * GA * D) = 19377.1$$

$$\text{ALLOWABLE BEARING} = \frac{\text{ULTIMATE BEARING}}{3} = 6459$$

THE ALLOWABLE BEARING VALUE SHOULD NOT EXCEED
6459 PSF. DESIGN SHOULD CONSIDER EXPANSION INDEX.

PLATE

APPENDIX

TEMPORARY BACKCUT STABILITY

J.O. A-6749-18

DATE 10/6/18

COHESION = 370 PSF

GAMA = 120 PCF

PHI = 25 DEGREES

CUT HEIGHT = 8 FEET

SLOPE ANGLE OF BACKFILL = 45 DEGREES

ASSUMED FAILURE ANGLE = 52 DEGREES

SOIL TYPE = Clayey sand

PORE PRESSURE NOT CONSIDERED

FORMULA

$$\text{SAFETY FACTOR} = \frac{(C * L) + (GA * \text{AREA} * \cos(Z) * \tan(\text{PHI}))}{GA * \text{AREA} * \sin(Z)} = 1.95$$

Z = FAILURE ANGLE

SINCE THE SAFETY FACTOR OF 1.95 IS GREATER THAN THE
REQUIRED 1.25, THE TEMPORARY EXCAVATION IS CONSIDERED TO
BE STABLE.

PLATE

Earth Pressure Calculations

Soil Strength Parameters:

$$\phi := 31$$

$$\gamma := 120$$

Active :

$$K_a := \tan \left[\left(45 - \frac{\phi}{2} \right) \cdot \left(\frac{\pi}{180} \right) \right]^2$$

Active earth Presure

$$K_a = 0.32$$

$$P_a := K_a \cdot \gamma$$

slope angle range, degrees

$$P_a = 38.412$$

LEVEL BACKFILL BEHIND WALL

$$P_a = 38.412$$

$$P_{a18} := P_a \cdot 1.08$$

5:1 BACKFILL BEHIND WALL

$$P_{a18} = 41.485$$

$$P_{a18} := P_a \cdot 1.22$$

3:1 BACKFILL BEHIND WALL

$$P_{a18} = 46.862$$

$$P_{a39} := P_a \cdot 1.48$$

2:1 BACKFILL BEHIND WALL

$$P_{a39} = 56.85$$

Passive

$$K_p := \tan \left[\left(45 + \frac{\phi}{2} \right) \cdot \left(\frac{\pi}{180} \right) \right]^2$$

$$K_p = 3.124$$

Passive Earth Presure

$$P_p := K_p \cdot \gamma$$

$$P_p = 374.884$$

Atrest

$$K_{at} := 1 - \sin \left(\phi \cdot \frac{\pi}{180} \right)$$

$$K_{at} = 0.485$$

$$P_{at} := K_{at} \cdot \gamma$$

$$P_{at} = 58.195$$

Seismic lateral earth pressure

$\phi := 31 \cdot \text{deg}$ angle of internal friction of soil

$\delta := 17 \cdot \text{deg}$ angle of friction between soil and wall, (concrete or masonry)

$\gamma := 120$ Soil Unit Weight

$PGAm := .939$

$h := 10$ Height of wall

$$kh := \frac{2}{3} \frac{PGAm}{2}$$

$kh = 0.313$

$$PaE := \frac{3}{8} \cdot \gamma \cdot h^2 \cdot kh$$

$$PaE = 1.408 \times 10^3 \quad Lb$$

$$EFP := \frac{[2 \cdot (PaE)]}{h^2}$$

$$EFP = 28.17 \quad \text{Seismic Equivalent Fluid Pressure (EFP)}$$

Project No.= A – 6749

Seismic lateral earth pressure

$\phi := 38 \cdot \text{deg}$ angle of internal friction of soil

$\delta := 17 \cdot \text{deg}$ angle of friction between soil and wall, (concrete or masonry)

$\gamma := 130$ Soil Unit Weight

$PGAm := .939$

$h := 40$ Height of wall

$$kh := \frac{2}{3} \frac{PGAm}{2}$$

$kh = 0.313$

$$PaE := \frac{3}{8} \cdot \gamma \cdot h^2 \cdot kh$$

$$PaE = 2.441 \times 10^4 \quad \text{Lb}$$

$$EFP := \frac{[2 \cdot (PaE)]}{h^2}$$

$$EFP = 30.517 \quad \text{Seismic Equivalent Fluid Pressure (EFP)}$$

Seismic lateral earth pressure

$\phi := 38 \cdot \text{deg}$ angle of internal friction of soil

$\delta := 17 \cdot \text{deg}$ angle of friction between soil and wall, (concrete or masonry)

$\gamma := 130$ Soil Unit Weight

$PGAm := .939$

$h := 20$ Height of wall

$$kh := \frac{2}{3} \frac{PGAm}{2}$$

$kh = 0.313$

$$PaE := \frac{3}{8} \cdot \gamma \cdot h^2 \cdot kh$$

$$PaE = 6.103 \times 10^3 \quad Lb$$

$$EFP := \frac{[2 \cdot (PaE)]}{h^2}$$

$$EFP = 30.517 \quad \text{Seismic Equivelent Fluid Presure (EFP)}$$

APPENDIX C

References

USGS Design Maps Summary Report

User-Specified Input

Report Title A-6774-18

Sun November 4, 2018 21:28:31 UTC


Building Code Reference Document ASCE 7-10 Standard

(which utilizes USGS hazard data available in 2008)

Site Coordinates 33.89756°N, 117.8159°W

Site Soil Classification Site Class D - "Stiff Soil"

Risk Category I/II/III

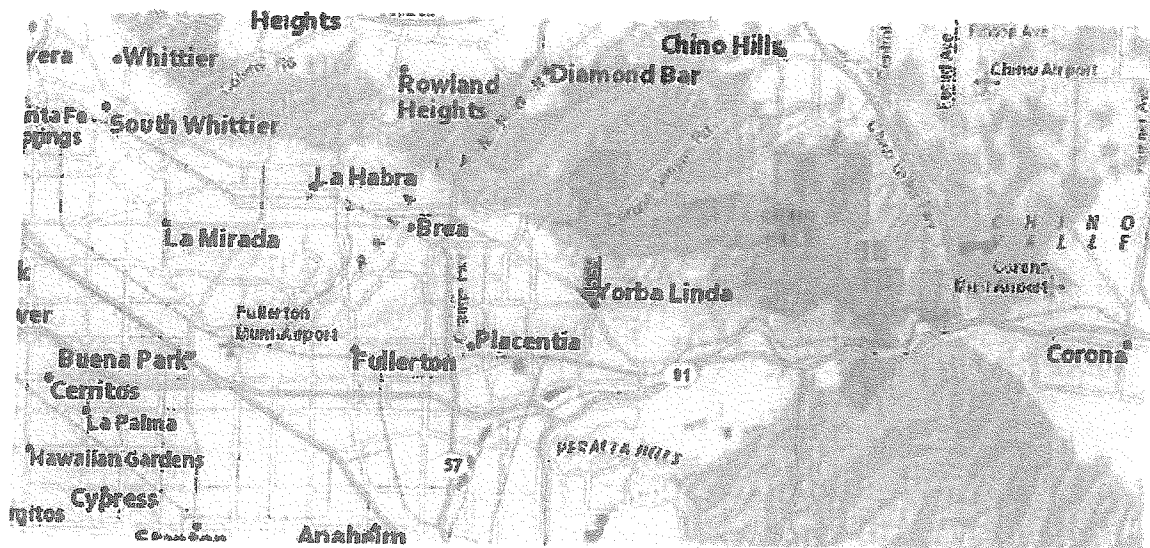


USGS-Provided Output


$S_s = 2.021 \text{ g}$	$S_{MS} = 2.021 \text{ g}$	$S_{DS} = 1.347 \text{ g}$
$S_1 = 0.749 \text{ g}$	$S_{M1} = 1.123 \text{ g}$	$S_{D1} = 0.749 \text{ g}$

For information on how the S_s and S_1 values above have been calculated from probabilistic (risk-targeted) and deterministic ground motions in the direction of maximum horizontal response, please return to the application and select the "2009 NEHRP" building code reference document.

MCE_R Response Spectrum

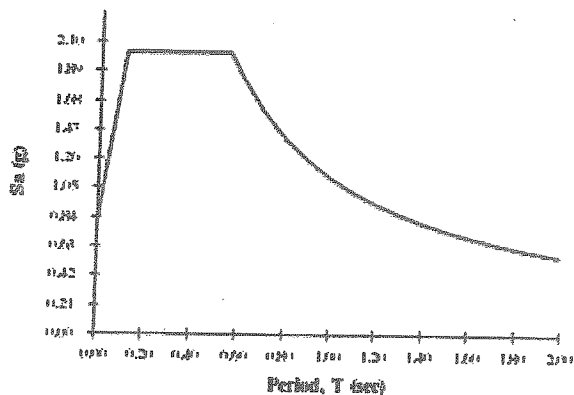

Design Response Spectrum

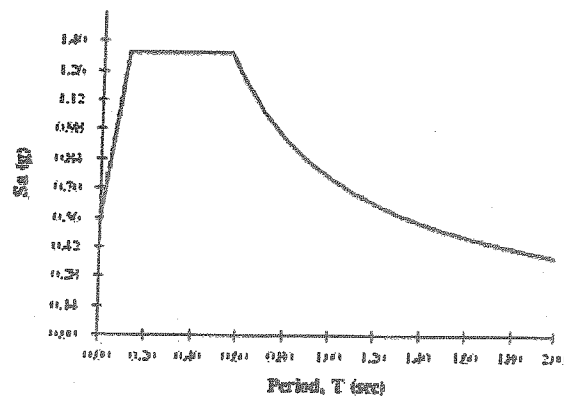

For PGA_M , T_L , C_{RS} , and C_{R1} values, please [view the detailed report](#).

Although this information is a product of the U.S. Geological Survey, we provide no warranty, expressed or implied, as to the accuracy of the data contained therein. This tool is not a substitute for technical subject-matter knowledge.

Design Maps Detailed Report

ASCE 7-10 Standard (33.89756°N, 117.8159°W)

Site Class D – "Stiff Soil", Risk Category I/II/III

Section 11.4.1 — Mapped Acceleration Parameters

Note: Ground motion values provided below are for the direction of maximum horizontal spectral response acceleration. They have been converted from corresponding geometric mean ground motions computed by the USGS by applying factors of 1.1 (to obtain S_s) and 1.3 (to obtain S_1). Maps in the 2010 ASCE-7 Standard are provided for Site Class B. Adjustments for other Site Classes are made, as needed, in Section 11.4.3.

From **Figure 22-1** ^[1]

$S_s = 2.021 \text{ g}$

From **Figure 22-2** ^[2]

$S_1 = 0.749 \text{ g}$

Section 11.4.2 — Site Class

The authority having jurisdiction (not the USGS), site-specific geotechnical data, and/or the default has classified the site as Site Class D, based on the site soil properties in accordance with Chapter 20.

Table 20.3-1 Site Classification

Site Class	$\bar{v}_s$	$\bar{N}$ or $\bar{N}_{ch}$	$\bar{s}_u$
A. Hard Rock	>5,000 ft/s	N/A	N/A
B. Rock	2,500 to 5,000 ft/s	N/A	N/A
C. Very dense soil and soft rock	1,200 to 2,500 ft/s	>50	>2,000 psf
D. Stiff Soil	600 to 1,200 ft/s	15 to 50	1,000 to 2,000 psf
E. Soft clay soil	<600 ft/s	<15	<1,000 psf

Any profile with more than 10 ft of soil having the characteristics:

- Plasticity index $PI > 20$,
- Moisture content $w \geq 40\%$, and
- Undrained shear strength $\bar{s}_u < 500 \text{ psf}$

F. Soils requiring site response analysis in accordance with Section 21.1

See Section 20.3.1

For SI: 1 ft/s = 0.3048 m/s 1 lb/ft² = 0.0479 kN/m²

Section 11.4.3 — Site Coefficients and Risk-Targeted Maximum Considered Earthquake (MCE_R) Spectral Response Acceleration Parameters

Table 11.4-1: Site Coefficient F_s

Site Class	Mapped MCE_R Spectral Response Acceleration Parameter at Short Period				
	$S_s \leq 0.25$	$S_s = 0.50$	$S_s = 0.75$	$S_s = 1.00$	$S_s \geq 1.25$
A	0.8	0.8	0.8	0.8	0.8
B	1.0	1.0	1.0	1.0	1.0
C	1.2	1.2	1.1	1.0	1.0
D	1.6	1.4	1.2	1.1	1.0
E	2.5	1.7	1.2	0.9	0.9
F	See Section 11.4.7 of ASCE 7				

Note: Use straight-line interpolation for intermediate values of S_s

For Site Class = D and $S_s = 2.021$ g, $F_s = 1.000$

Table 11.4-2: Site Coefficient F_v

Site Class	Mapped MCE_R Spectral Response Acceleration Parameter at 1-s Period				
	$S_1 \leq 0.10$	$S_1 = 0.20$	$S_1 = 0.30$	$S_1 = 0.40$	$S_1 \geq 0.50$
A	0.8	0.8	0.8	0.8	0.8
B	1.0	1.0	1.0	1.0	1.0
C	1.7	1.6	1.5	1.4	1.3
D	2.4	2.0	1.8	1.6	1.5
E	3.5	3.2	2.8	2.4	2.4
F	See Section 11.4.7 of ASCE 7				

Note: Use straight-line interpolation for intermediate values of S_1

For Site Class = D and $S_1 = 0.749$ g, $F_v = 1.500$

Equation (11.4-1):

$$S_{MS} = F_a S_s = 1.000 \times 2.021 = 2.021 \text{ g}$$

Equation (11.4-2):

$$S_{M1} = F_v S_1 = 1.500 \times 0.749 = 1.123 \text{ g}$$

Section 11.4.4 — Design Spectral Acceleration Parameters

Equation (11.4-3):

$$S_{DS} = \frac{2}{3} S_{MS} = \frac{2}{3} \times 2.021 = 1.347 \text{ g}$$

Equation (11.4-4):


$$S_{D1} = \frac{2}{3} S_{M1} = \frac{2}{3} \times 1.123 = 0.749 \text{ g}$$

Section 11.4.5 — Design Response Spectrum

From Figure 22-12 [3]


 $T_L = 8 \text{ seconds}$

Figure 11.4-1: Design Response Spectrum

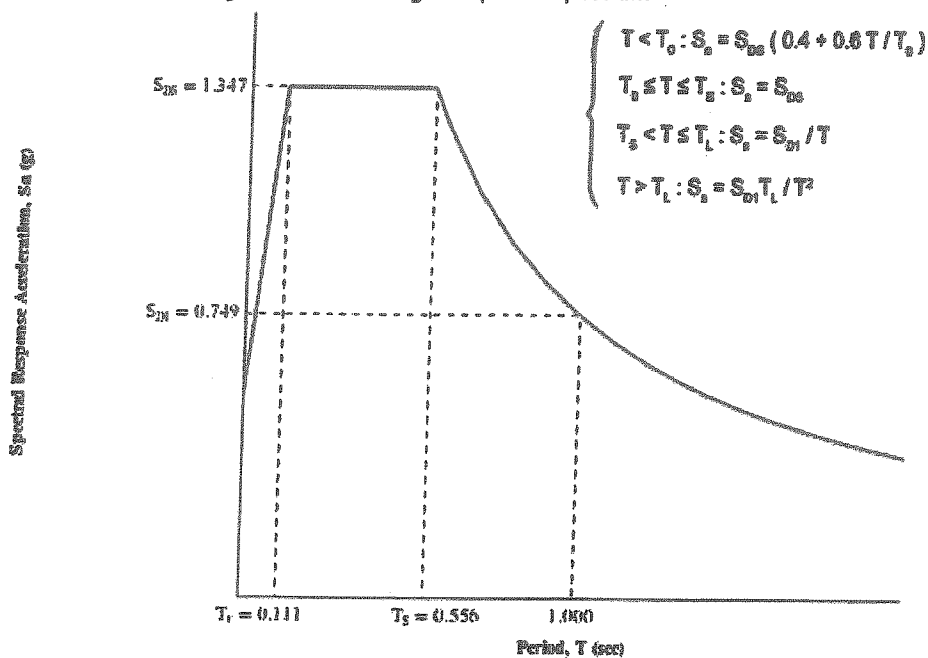

Section 11.4.6 — Risk-Targeted Maximum Considered Earthquake (MCE_R) Response Spectrum

The MCE_R Response Spectrum is determined by multiplying the design response spectrum above by 1.5.

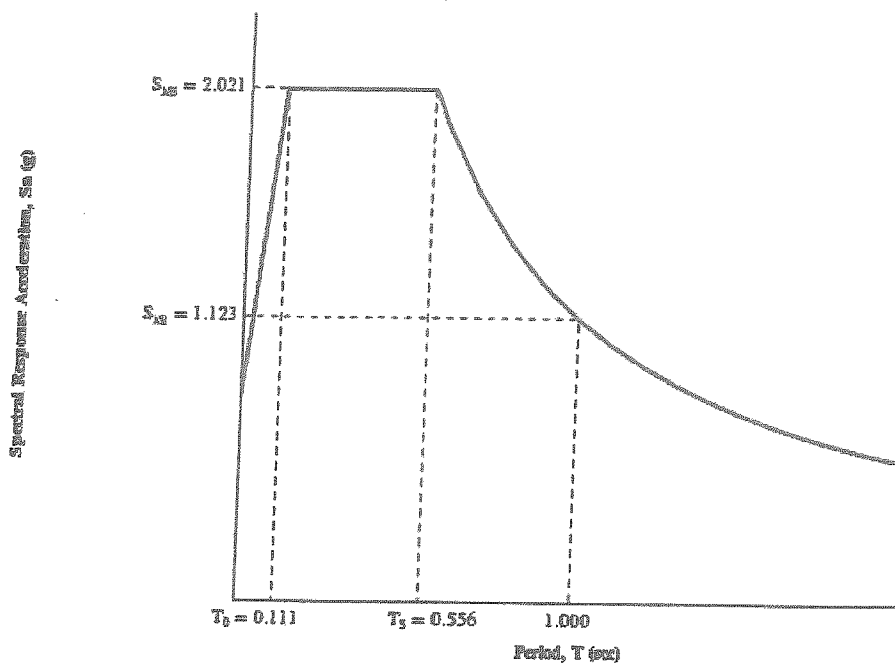

Section 11.8.3 — Additional Geotechnical Investigation Report Requirements for Seismic Design Categories D through F

From Figure 22-7 ^[4]

$$PGA = 0.770$$

Equation (11.8-1):

$$PGA_M = F_{PGA} PGA = 1.000 \times 0.770 = 0.77 \text{ g}$$

Table 11.8-1: Site Coefficient F_{PGA}

Site Class	Mapped MCE Geometric Mean Peak Ground Acceleration, PGA				
	PGA ≤ 0.10	PGA = 0.20	PGA = 0.30	PGA = 0.40	PGA ≥ 0.50
A	0.8	0.8	0.8	0.8	0.8
B	1.0	1.0	1.0	1.0	1.0
C	1.2	1.2	1.1	1.0	1.0
D	1.6	1.4	1.2	1.1	1.0
E	2.5	1.7	1.2	0.9	0.9
F	See Section 11.4.7 of ASCE 7				

Note: Use straight-line interpolation for intermediate values of PGA

For Site Class = D and PGA = 0.770 g, $F_{PGA} = 1.000$

Section 21.2.1.1 — Method 1 (from Chapter 21 – Site-Specific Ground Motion Procedures for Seismic Design)

From Figure 22-17 ^[5]

$$C_{RS} = 0.960$$

From Figure 22-18 ^[6]

$$C_{R1} = 0.966$$

Section 11.6 — Seismic Design Category

Table 11.6-1 Seismic Design Category Based on Short Period Response Acceleration Parameter

VALUE OF S_{DS}	RISK CATEGORY		
	I or II	III	IV
$S_{DS} < 0.167g$	A	A	A
$0.167g \leq S_{DS} < 0.33g$	B	B	C
$0.33g \leq S_{DS} < 0.50g$	C	C	D
$0.50g \leq S_{DS}$	D	D	D

For Risk Category = I and $S_{DS} = 1.347g$, Seismic Design Category = D

Table 11.6-2 Seismic Design Category Based on 1-S Period Response Acceleration Parameter

VALUE OF S_{D1}	RISK CATEGORY		
	I or II	III	IV
$S_{D1} < 0.067g$	A	A	A
$0.067g \leq S_{D1} < 0.133g$	B	B	C
$0.133g \leq S_{D1} < 0.20g$	C	C	D
$0.20g \leq S_{D1}$	D	D	D

For Risk Category = I and $S_{D1} = 0.749g$, Seismic Design Category = D

Note: When S_1 is greater than or equal to $0.75g$, the Seismic Design Category is E for buildings in Risk Categories I, II, and III, and F for those in Risk Category IV, irrespective of the above.

Seismic Design Category $\equiv$ "the more severe design category in accordance with Table 11.6-1 or 11.6-2" = D

Note: See Section 11.6 for alternative approaches to calculating Seismic Design Category.

References

1. Figure 22-1: https://earthquake.usgs.gov/hazards/designmaps/downloads/pdfs/2010_ASCE-7_Figure_22-1.pdf
2. Figure 22-2: https://earthquake.usgs.gov/hazards/designmaps/downloads/pdfs/2010_ASCE-7_Figure_22-2.pdf
3. Figure 22-12: https://earthquake.usgs.gov/hazards/designmaps/downloads/pdfs/2010_ASCE-7_Figure_22-12.pdf
4. Figure 22-7: https://earthquake.usgs.gov/hazards/designmaps/downloads/pdfs/2010_ASCE-7_Figure_22-7.pdf
5. Figure 22-17: https://earthquake.usgs.gov/hazards/designmaps/downloads/pdfs/2010_ASCE-7_Figure_22-17.pdf
6. Figure 22-18: https://earthquake.usgs.gov/hazards/designmaps/downloads/pdfs/2010_ASCE-7_Figure_22-18.pdf

APPENDIX D

General Grading Specifications

GENERAL EARTHWORK AND GRADING SPECIFICATIONS

1. GENERAL INTENT

These specifications present general procedures and requirements for grading and earthwork as shown on the approved grading plans, including preparation of areas to be filled, placement of fill, installation of subdrains, and excavations. The recommendations contained in the geotechnical report are a part of the earthwork and grading specifications and shall supersede the provisions contained hereinafter in the case of conflict. Evaluations performed by the consultant during the course of grading may result in new recommendations of the geotechnical report.

2.EARTHWORK OBSERVATION AND TESTING

Prior to the commencement of grading, a qualified geotechnical consultant (soils engineer and engineering geologist, and their representatives) shall be employed for the purpose of observing earthwork and testing the fills for conformance with the recommendations of the geotechnical report and these specifications. It will be necessary that the consultant provide adequate testing and observation so that he may determine that the work was accomplished as specified. It shall be the responsibility of the contractor to assist the consultant and keep him apprised of work schedules and changes so that he may schedule his personnel accordingly.

It shall be the sole responsibility of the contractor to provide adequate equipment and methods to accomplish the work in accordance with applicable grading codes or agency ordinances, these specifications and the approved grading plans. If in the opinion of the consultant, unsatisfactory conditions, such as questionable soil, poor moisture condition, inadequate compaction, adverse weather, etc., are resulting in a quality of work less than required in these specifications, the consultant will be empowered to reject the work and recommend that construction be topped until the conditions are rectified. Maximum dry density tests used to determine the degree of compaction will be performed in accordance with the American Society of Testing and Materials tests method ASTM D 1557-00.

3.0 PREPARATION OF AREAS TO BE FILLED

3.1 Clearing and Grubbing: All brush, vegetation and debris shall be removed or piled and otherwise disposed of.

3.2 Processing: The existing ground which is determined to be satisfactory for support of fill shall be scarified to a minimum depth of 6 inches. Existing ground which is not satisfactory shall be overexcavated as specified in the following section. Scarification shall continue until the soils are broken down and free of large clay lumps or clods and until the working surface is reasonably uniform and free of uneven features which would inhibit uniform compaction.

3.3 Overexcavation: Soft, dry, spongy, highly fractured or otherwise unsuitable ground, extending to such a depth that the surface processing cannot adequately improve the condition, shall be overexcavated down to firm ground, approved by the consultant.

3.4 Moisture Conditioning: Overexcavated and processed soils shall be watered, dried-back, blended, and/or mixed, as required to attain a uniform moisture content near optimum.

3.5 Recomposition: Overexcavated and processed soils which have been properly mixed and moisture- conditioned shall be recompacted to a minimum relative compaction of 90 percent.

3.6 Benching: Where fills are to be placed on ground with slopes steeper than 5: 1 (horizontal to vertical units), the ground shall be stepped or benched. The lowest bench shall be a minimum of 15 feet wide, shall be at least 2 feet deep, shall expose firm material, and shall be approved by the consultant. Other benches shall be excavated in firm material for a minimum width of 4 feet. Ground sloping flatter than 5 : 1 shall be benched or otherwise overexcavated when considered necessary by the consultant.

3.7 Approval: All areas to receive fill, including processed areas, removal areas and toe-of-fill benches shall be approved by the consultant prior to fill placement.

4.0 FILL MATERIAL

4.1 General: Material to be placed as fill shall be free of organic matter and other deleterious substances, and shall be approved by the consultant. Soils of poor gradation, expansion, or strength characteristics shall be placed in areas designated by consultant or shall be mixed with other soils to serve as satisfactory fill material.

4.2 Oversize: Oversize material defined as rock, or other irreducible material with a maximum dimension greater than 12 inches, shall not be buried or placed in fills, unless the location, materials, and disposal methods are specifically approved by the consultant. Oversize disposal operations shall be such that nesting of oversize material does not occur, and such that the oversize material is completely surrounded by compacted or densified fill. Oversize material shall not be placed within 10 feet vertically of finish grade or within the range of future utilities or underground construction, unless specifically approved by the consultant.

4.3 Import: If importing of fill material is required for grading, the import material shall meet the requirements of Section 4. 1.

5.0 FILL PLACEMENT AND COMPACTION

5.1 Fill Lifts: Approved fill material shall be placed in areas prepared to receive fill in near-horizontal layers not exceeding 6 inches in compacted thickness. The consultant may approve thicker lifts if testing indicates the grading procedures are such that adequate compaction is being achieved with lifts of greater thickness. Each layer shall be spread evenly and shall be thoroughly mixed during spreading to attain uniformity of material and moisture in each layer.

5.2 Fill Moisture: Fill layers at a moisture content less than optimum shall be watered and mixed, and wet fill layers shall be aerated by scarification or shall be blended with drier material. Moisture-conditioning and mixing of fill layers shall continue until the fill material is at a uniform moisture content or near optimum.

5.3 Compaction of Fill: After each layer has been evenly spread, moisture conditioned, and mixed, it shall be uniformly compacted to not less than 90 percent of maximum dry density. Compaction equipment shall be adequately sized and shall be either specifically designed for soil compaction or of proven reliability, to efficiently achieve the specified degree of compaction.

5.4 Fill Slopes: Compaction of slopes shall be accomplished, in addition to normal compacting procedures, by backfilling of slopes with sheepsfoot rollers at frequent increments of 2 to 3 feet in fill elevation gain, or by other methods producing satisfactory results. At the completion of grading, the relative compaction of the slope out to the slope face shall be at least 90 percent.

5.5 Compaction Testing: Field tests to check the fill moisture and degree of compaction will be performed by the consultant. The location and frequency of tests shall be at the consultant's discretion. In general, the tests will be taken at an interval not exceeding 2 feet in vertical rise and/or 1,000 cubic yards of embankment.

6.0 SUBDRAIN INSTALLATION

Subdrain systems, if required, shall be installed in approved ground to conform to the approximate alignment and details shown on the plans or herein. The subdrain location or materials shall not be changed or modified without the approval of the consultant. The consultant, however, may recommend and upon approval, direct changes in subdrain line, grade or material. All subdrains should be surveyed for line and grade after installation, and sufficient time shall be allowed for the surveys, prior to commencement of filling over the subdrains.

7.0 EXCAVATION

Excavation and cut slopes will be examined during grading. If directed by the consultant, further excavation or overexcavation and refilling of cut areas shall be performed, and/or remedial grading of cut slopes shall be performed. Where fill-over-cut slopes are to be graded, unless otherwise approved, the cut portion of the slope shall be made and approved by the consultant prior to placement of materials for construction of the fill portion of the slope.

8.0 TRENCH BACKFILLS


8.1 Supervision: Trench excavations for the utility pipes shall be backfilled under engineering supervision.

8.2 Pipe Zone: After the utility pipe has been laid, the space under and around the pipe shall be backfilled with clean sand or approved granular soil to a depth of at least one foot over the top of the pipe. The sand backfill shall be uniformly jetted into place before the controlled backfill is placed over the sand.


8.3 Fill Placement: The onsite materials, or other soils approved by the engineer, shall be watered and mixed as necessary prior to placement in lifts over the sand backfill.

8.4 Compaction: The controlled backfill shall be compacted to at least 90 percent of the maximum laboratory density as determined by the ASTM compaction method described above.

8.5 Observation and Testing: Field density tests and inspection of the backfill procedures shall be made by the soil engineer during backfilling to see that the proper moisture content and uniform compaction is being maintained. The contractor shall provide test holes and exploratory pits as required by the soil engineer to enable sampling and testing.

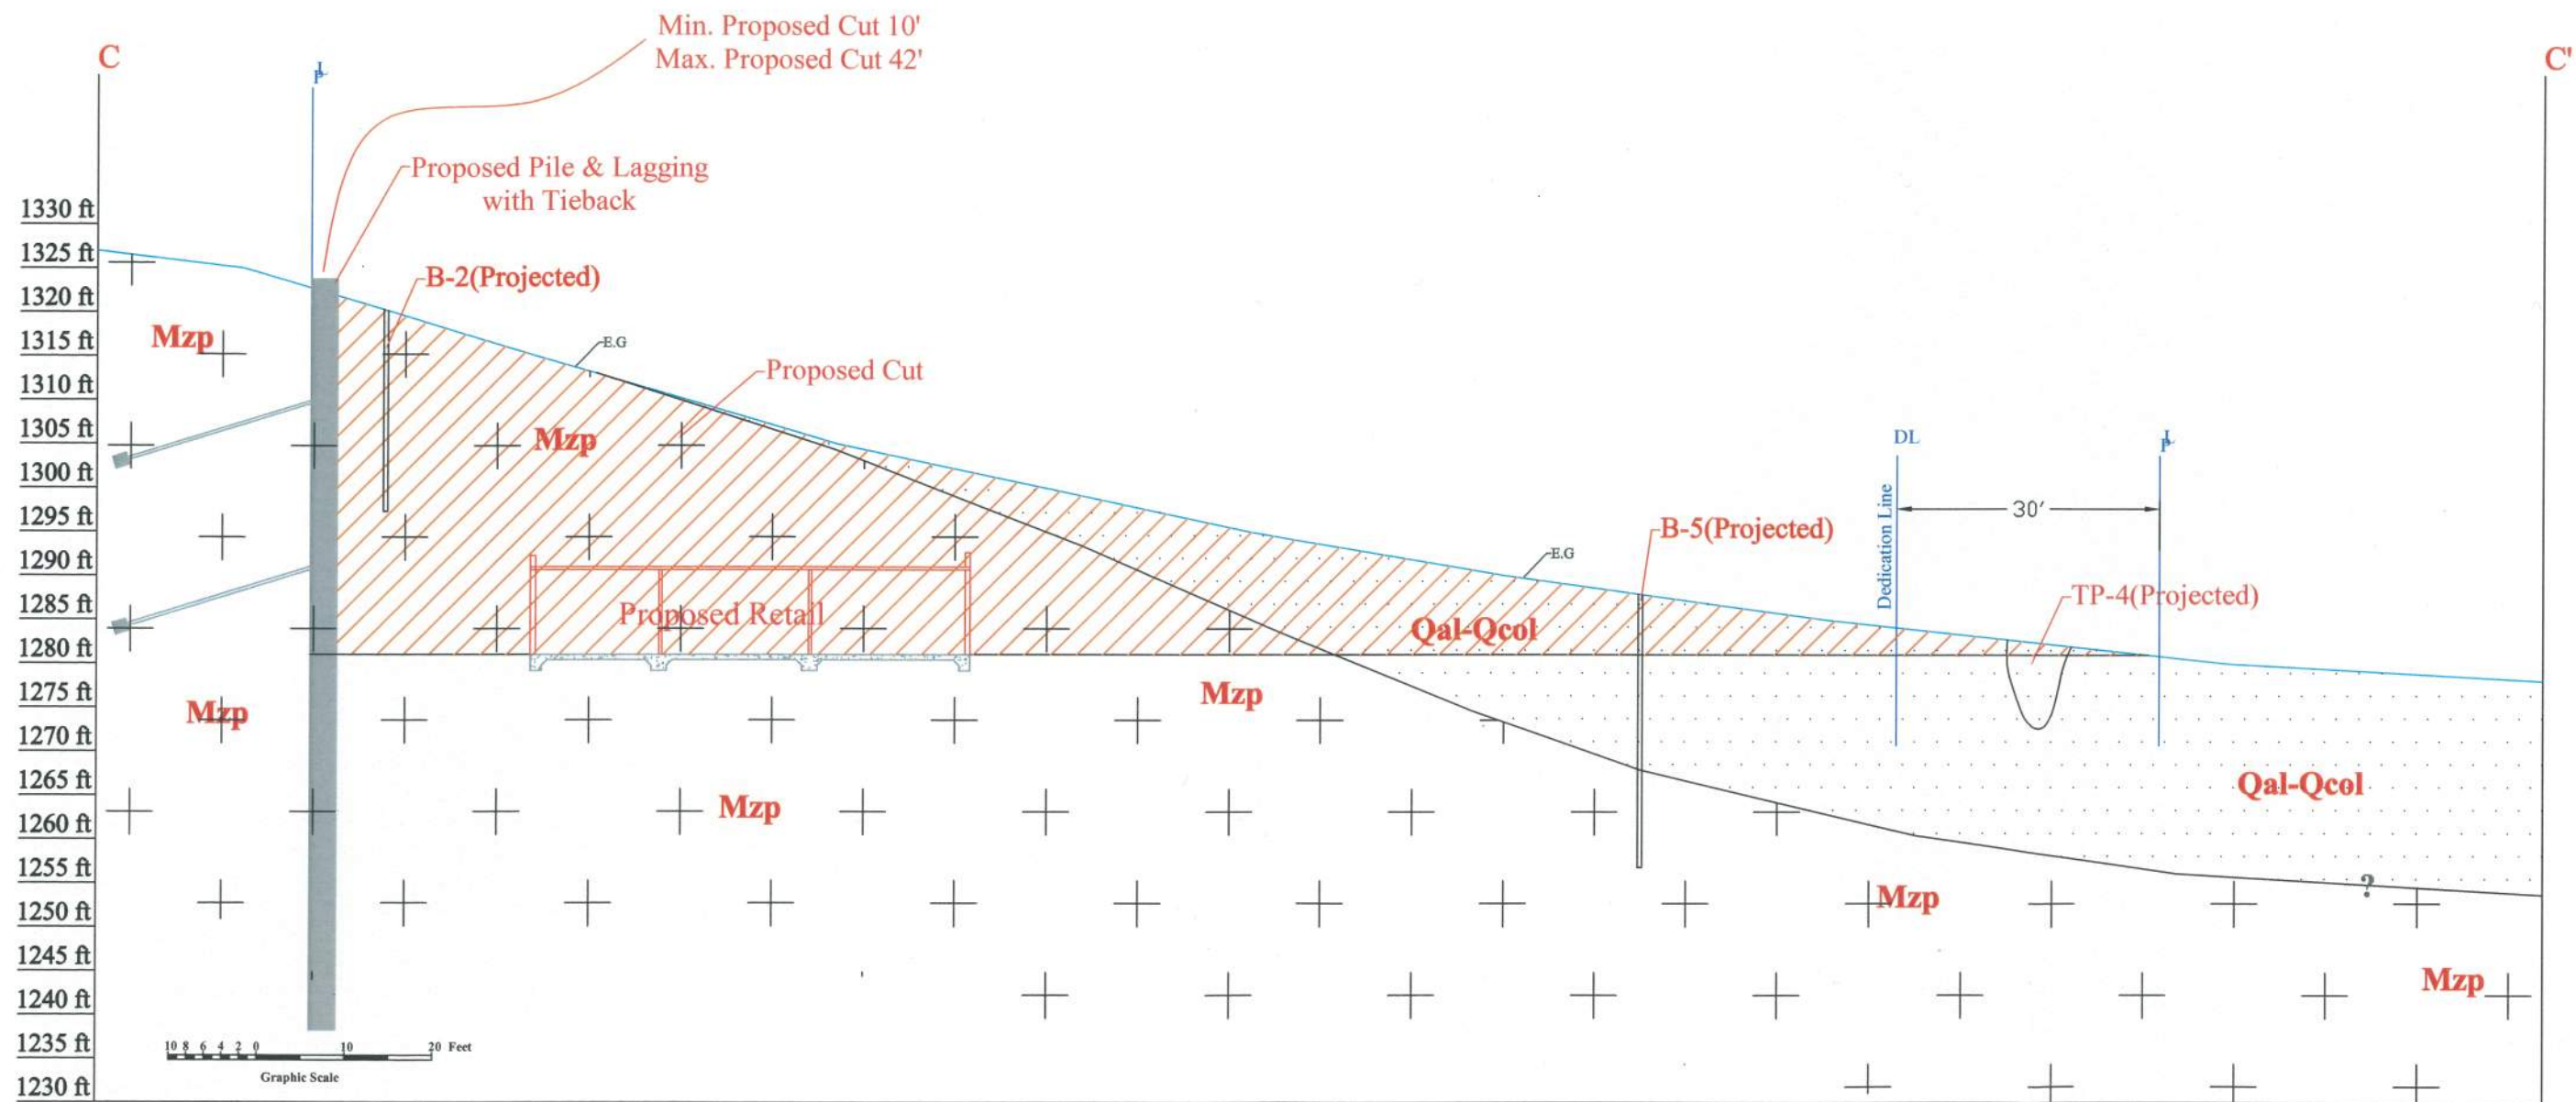

LEGEND		 soil PACIFIC Inc. Geotechnical & Environmental Services 675 N. Eckhoff, Suite # A Orange, CA 92868	Project Location:		CROSS SECTION C-C'	
Qal/Qcol	Alluvial and colluvial deposits= to Morton's Qyva		Lots 14-17 of Lake Shore Drivr		FIGURE-A-1-2	PROJECT NO.: A-6749-19
Mzp	Mesozoic Phyllite		Addition, Lake Elsinore, CA		DATE : 01/31/2019	SCALE: 1"=20'
	 Testpit Location					

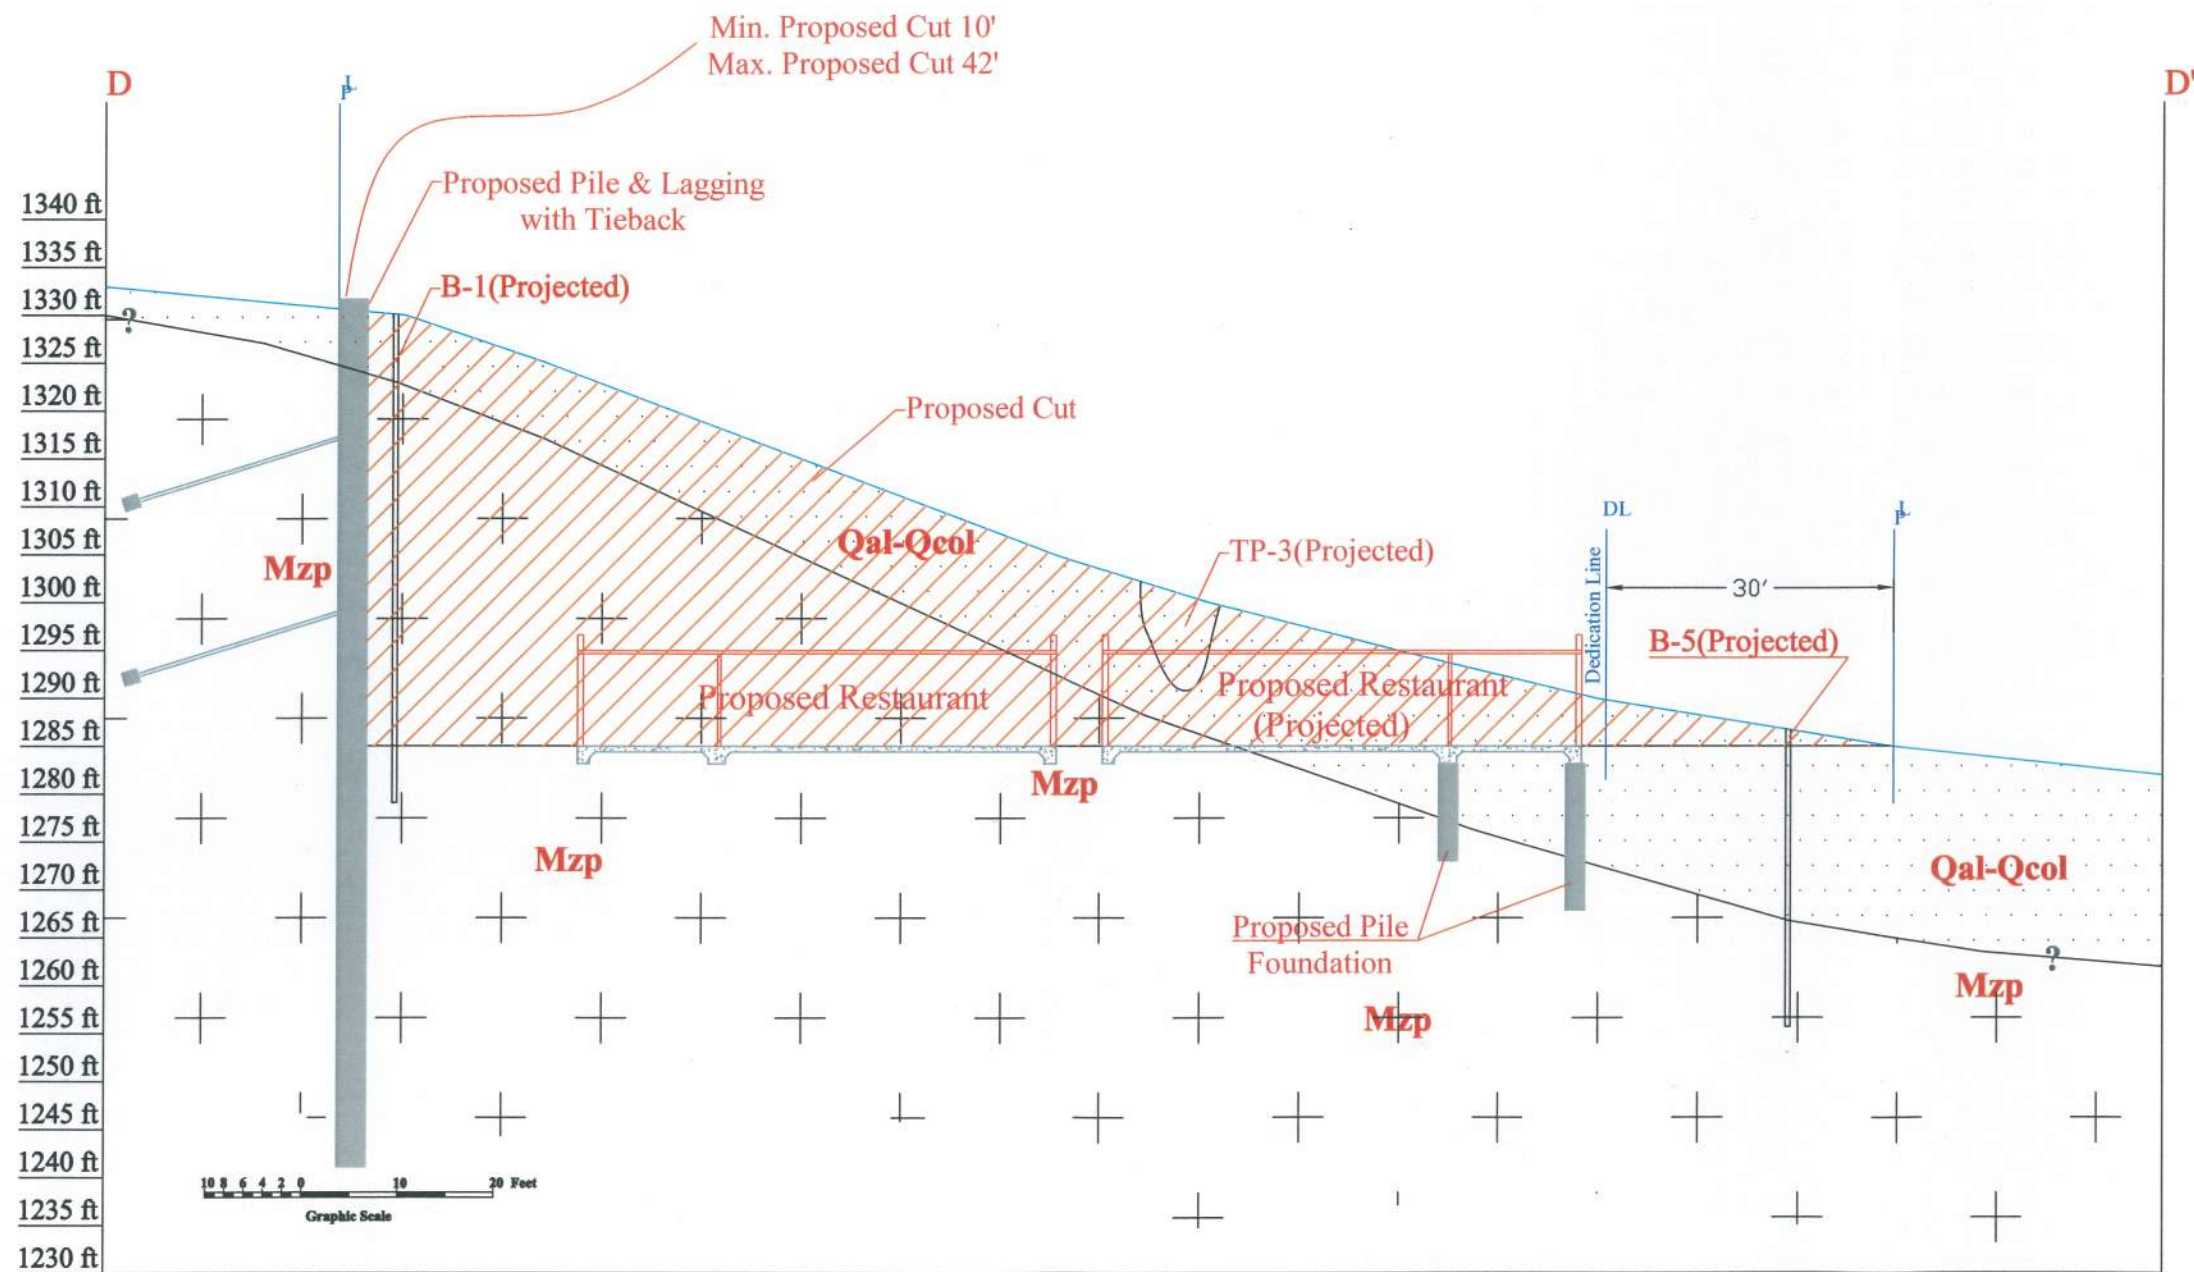

LEGEND

Qal/Qcol Alluvial and colluvial deposits= to Morton's Qyva
Mzp Mesozoic Phyllite ∪ Testpit Location



Project Location:



Lots 14-17 of Lake Shore Drive
 Addition, Lake Elsinore, CA

CROSS SECTION D-D'

FIGURE-A-1-3 PROJECT NO.: A-6749-19

DATE : 01/31/2019

SCALE: 1"=20'

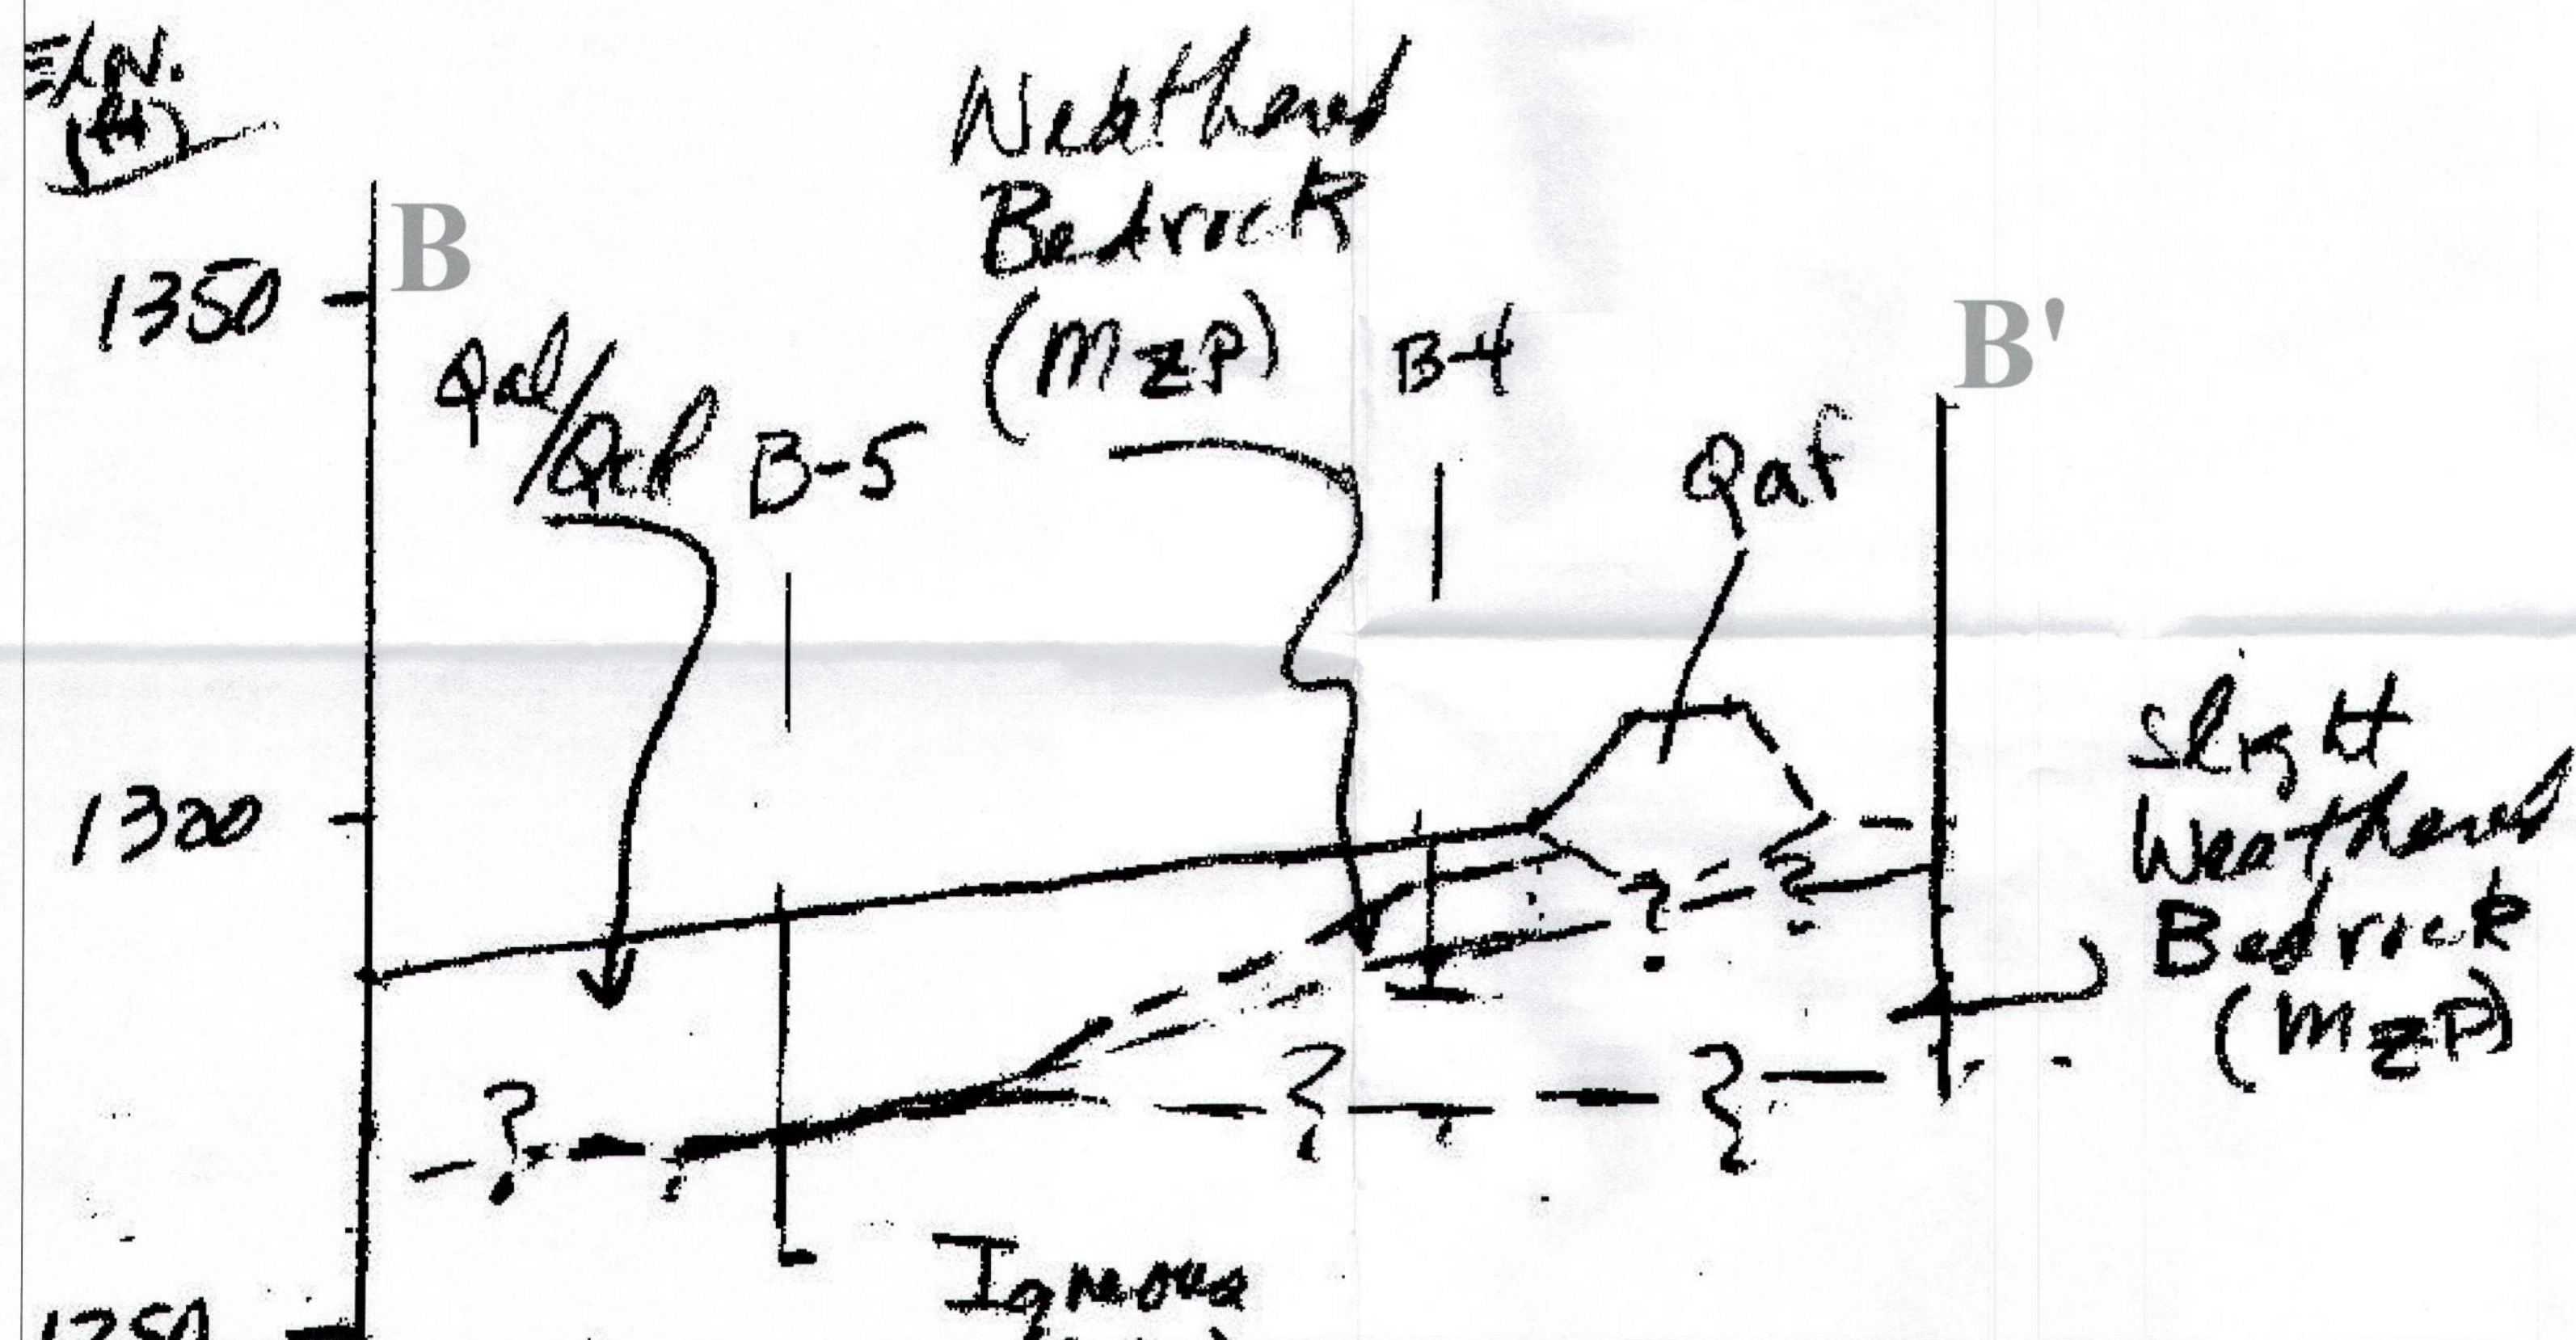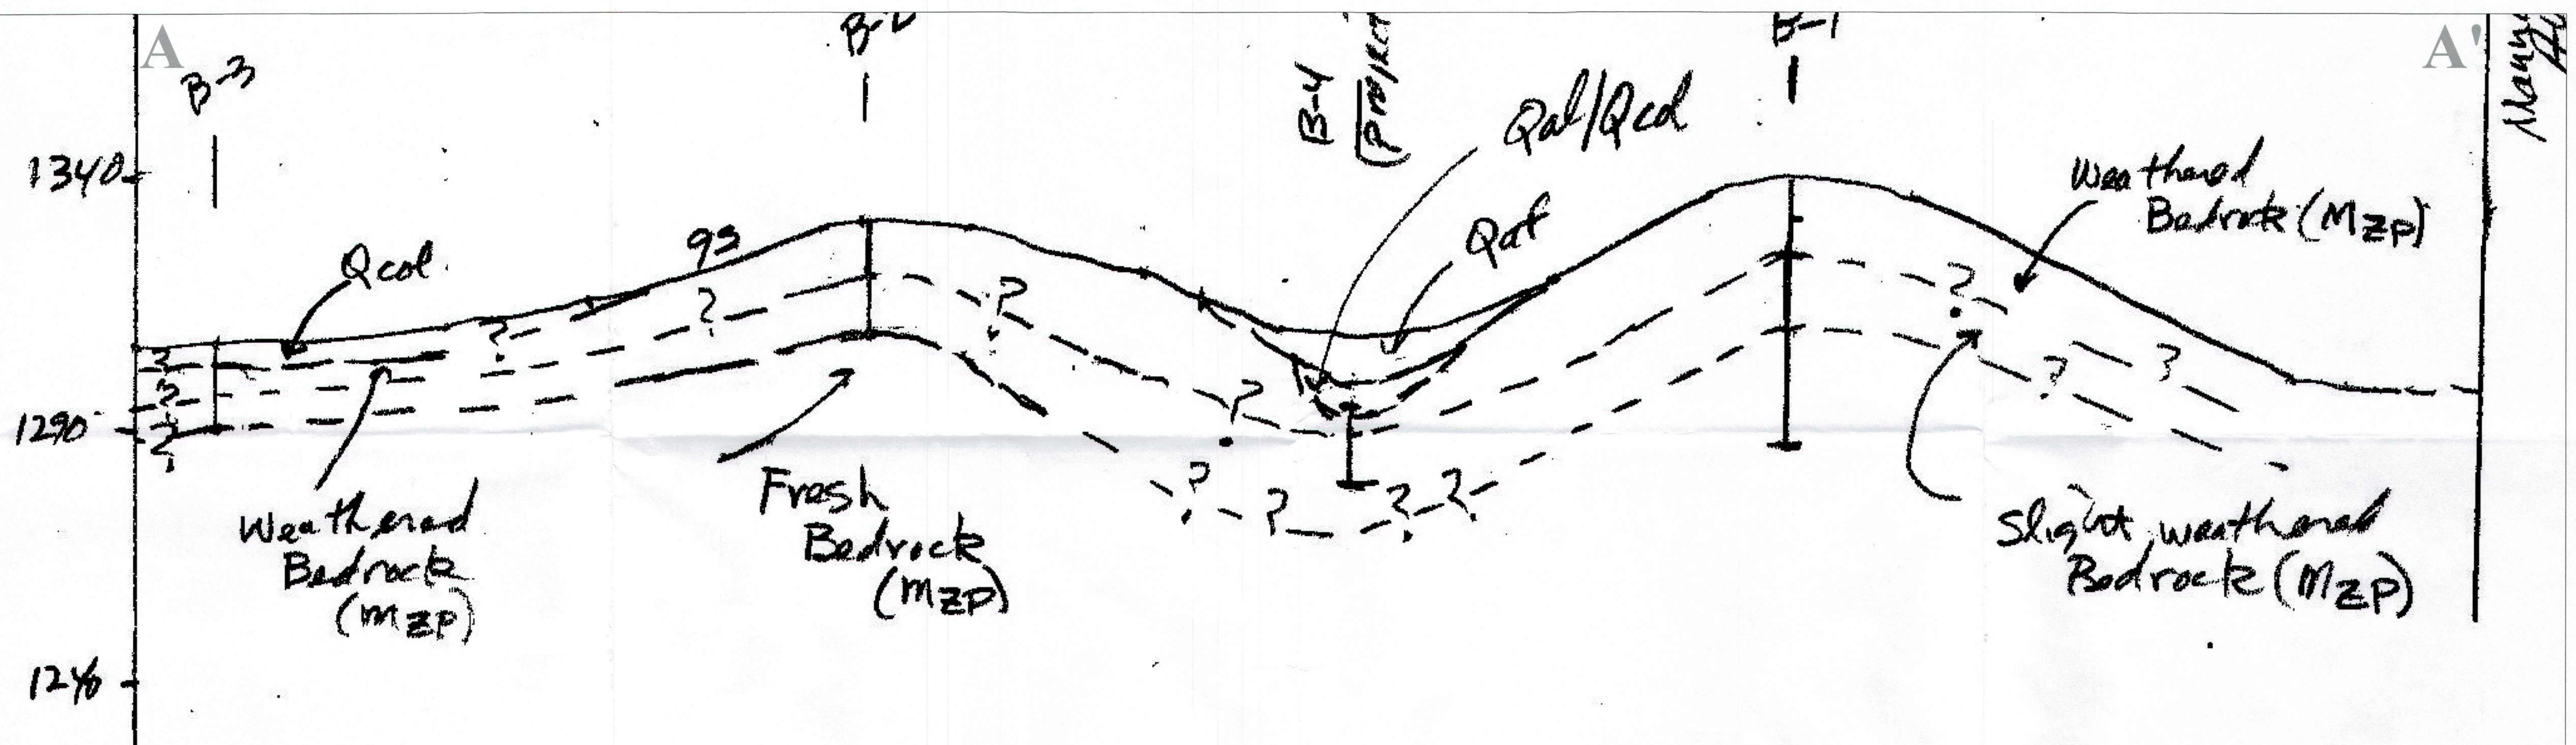

20 16 12 8 4 0 20 40 Feet
Graphic Scale


LEGEND

Qaf Artificial Fill
Mzp Mesozoic Phyllite
Qal/Qcd Alluvial and colluvial deposits= to Morton's Qyva

Project Location:
Lots 14-17 of Lake Shore Drivr Addition,
Lake Elsinore, CA

CROSS SECTIONS A-A' & B-B'

FIGURE-A-1-1-1 PROJECT NO.: A-6749-19
DATE : 01/31/2019 SCALE: 1"=30'

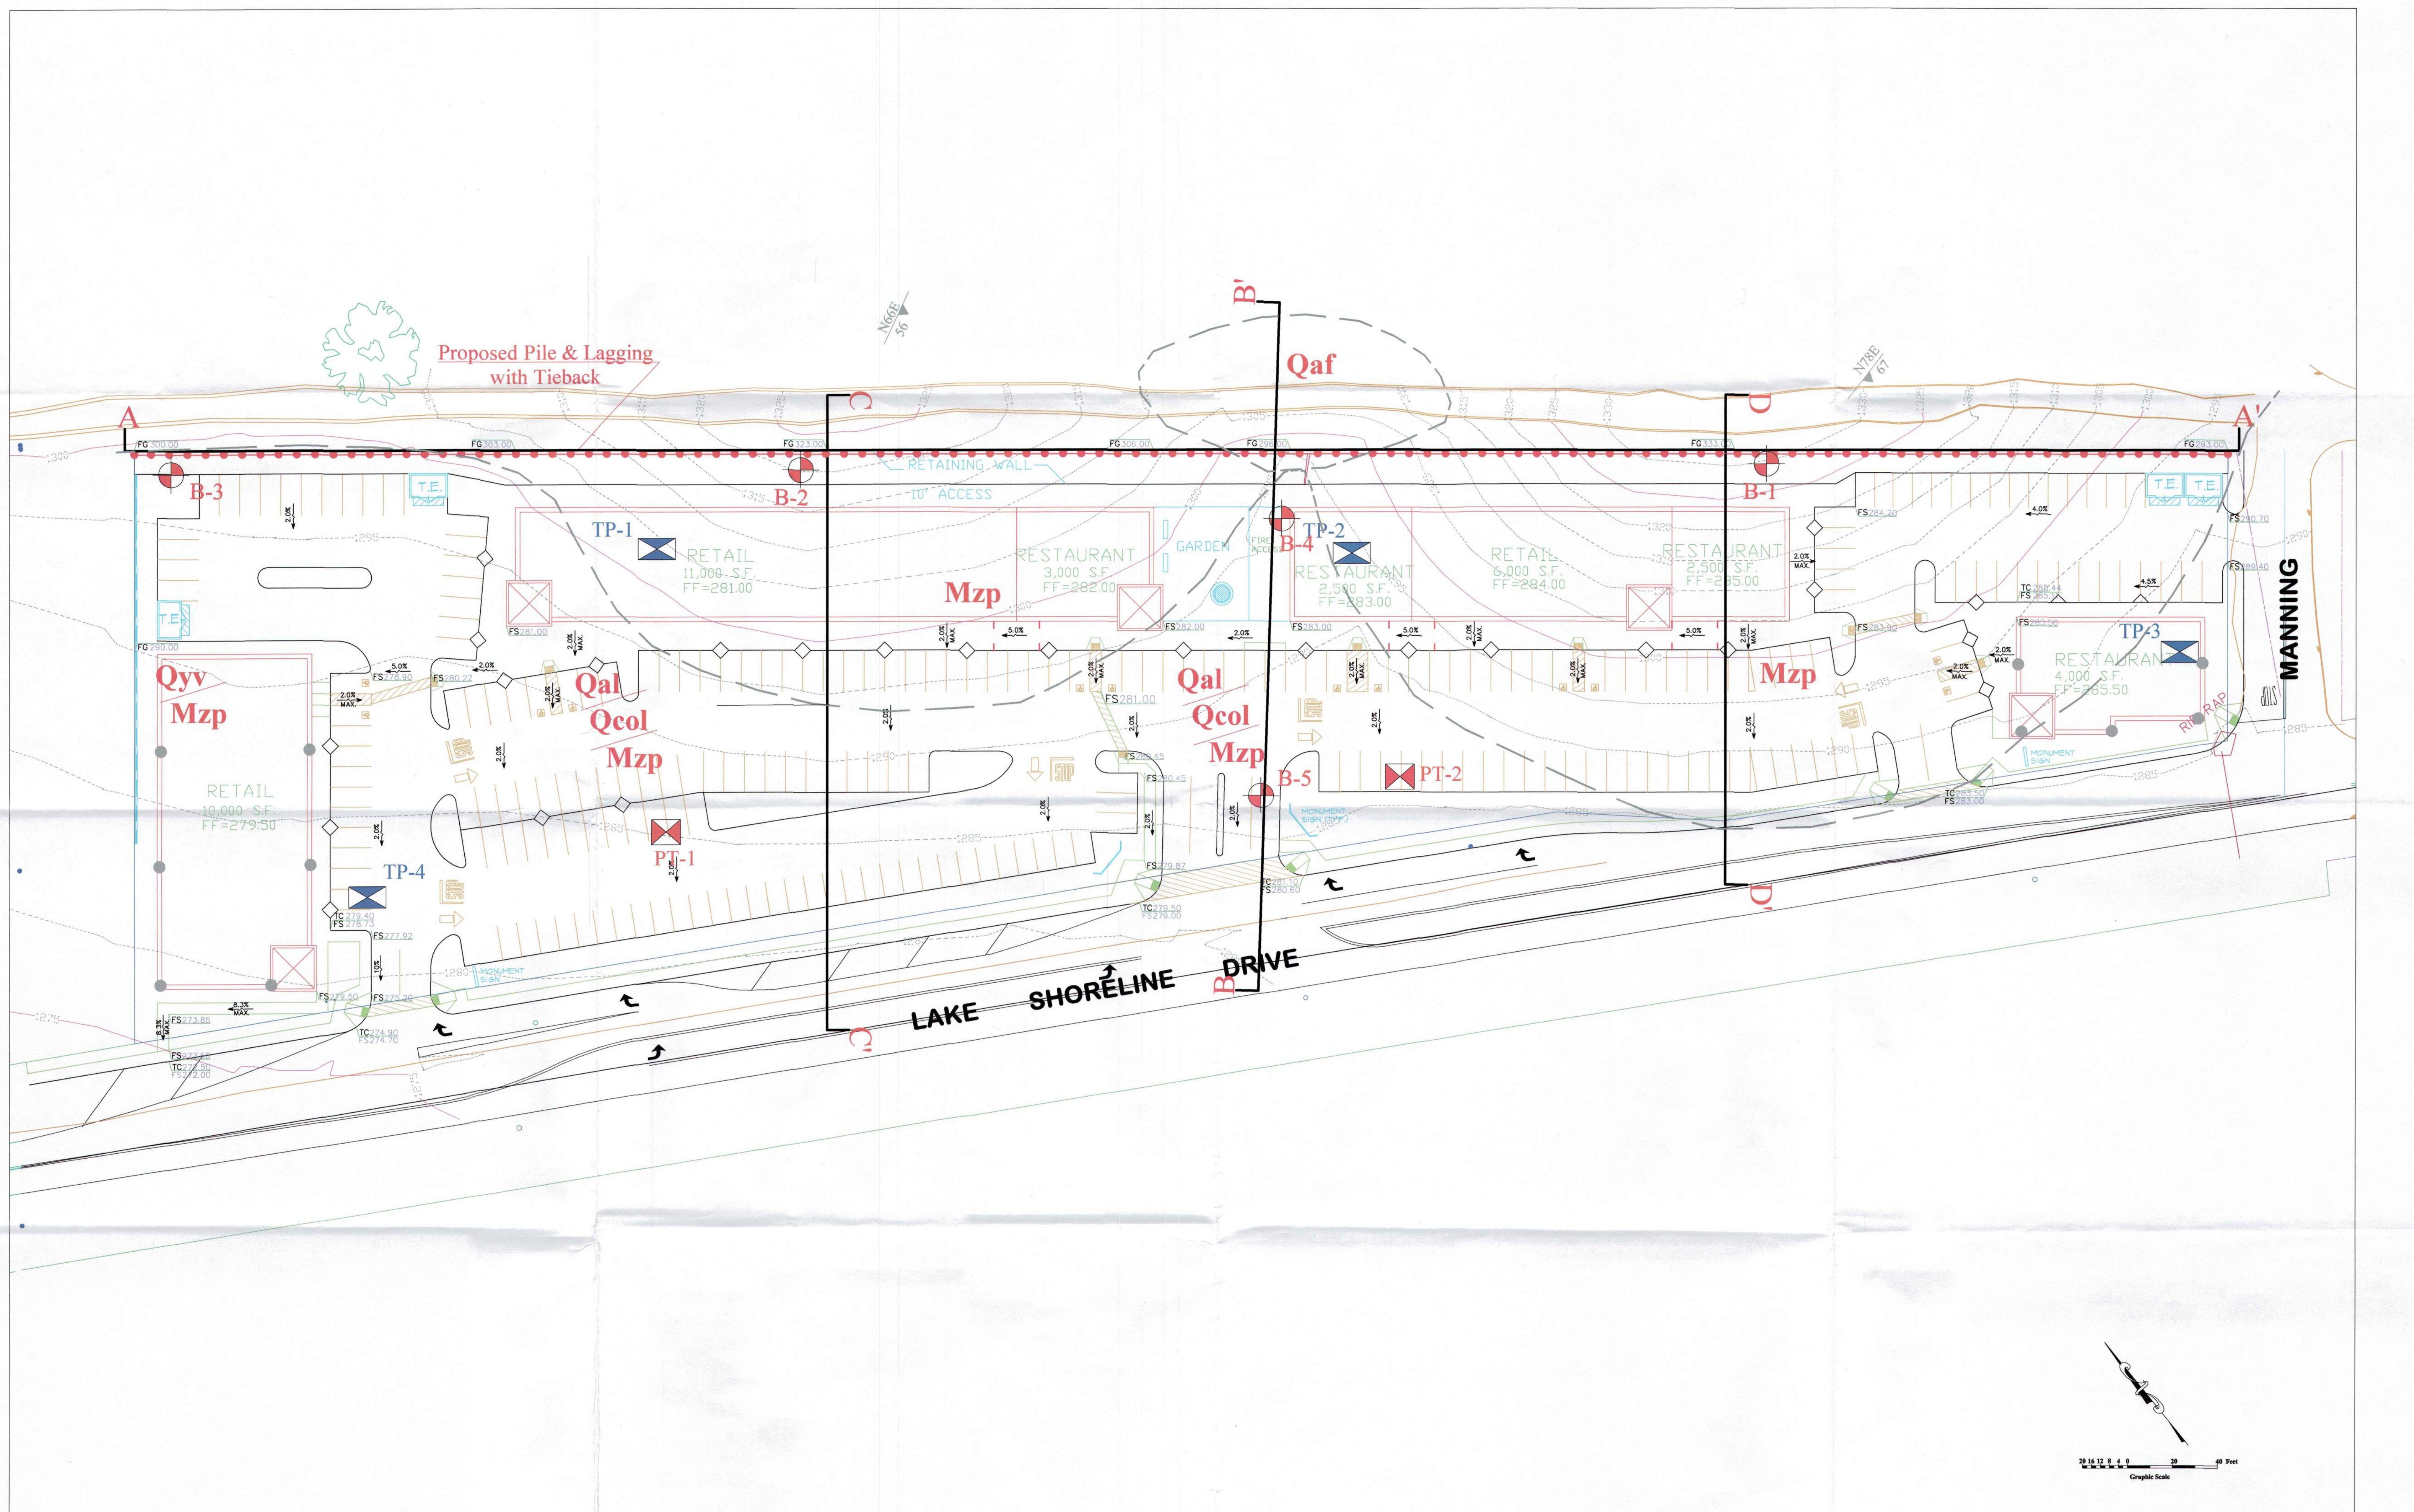

Appendix 4: Historical Site Conditions

Phase I Environmental Site Assessment or Other Information on Past Site Use

Appendix 5: LID Infeasibility

LID Technical Infeasibility Analysis

Appendix 6: BMP Design Details

BMP Sizing, Design Details and other Supporting Documentation

October 18, 2019

Subject: Lakeview Plaza, lake Elsenore, CA
Bio Clean ID: 9428

To Whom It May Concern,

The MWS Linear will be sized in accordance with the TAPE GULD approval for the Modular Wetland System. The system is sized at a loading rate of (less than or equal to) 1.0 gpm/ sq ft, where the pre-filter cartridges are sized at a loading rate of less than 2.10 gpm/ sq ft. Design, sizing, and loading have been reviewed and approved by a Modular Wetland Representative and is ready for final approval. Shown below are the calculations for this Project:

MWS-8-20-V-UG-HC

MWS Treatment Capacity =	0.8 (cfs)			
Required Treatment Flow =	0.8 (cfs)	OR	359.04 (gpm)	{=0.8 x 448.8}
Operating head/ HGL =	4.7 (ft)			
Pre-filter Cartridges included =	7.0			
Surface Area per Cartridge =	25.6 (sf)			
Loading rate (Prefilter Cartridge)	359.04/(25.6 x 7)	=	2.0 (gpm/sf)	
MWS Surface Area =	74 (sf)			
Media Loading rate =	359.04/(74 x 4.7)	=	1.0 (gpm/sf)	

If you have any questions please feel free to contact us at your convenience.

Sincerely,



Gurinder Singh
Stormwater Engineer
Modular Wetland System, Inc.

Santa Ana Watershed

V_{BMP} and Q_{BMP} worksheets

These worksheets are to be used to determine the required

Design Capture Volume (V_{BMP})

or the

Design Flow Rate (Q_{BMP})

for BMPs in the Santa Ana Watershed

To verify which watershed your project is located within, visit

www.rcflood.org/npdes

and use the 'Locate my Watershed' tool

If your project is not located in the Santa Ana Watershed,

Do not use these worksheets! Instead visit

www.rcflood.org/npdes/developers.aspx

To access worksheets applicable to your watershed

Use the **tabs across the bottom
to access the worksheets for the Santa Ana Watershed**

Santa Ana Watershed - BMP Design Flow Rate, Q_{BMP} (Rev. 10-2011)						Legend:		Required Entries					
								Calculated Cells					
(Note this worksheet shall only be used in conjunction with BMP designs from the LID BMP Design Handbook)													
Company Name Blue Peak Engineering						Date 3/20/2020							
Designed by M.D.						Case No							
Company Project Number/Name													
BMP Identification													
BMP NAME / ID BMP-E (OFF-SITE) INSERT FILTERS - ALTERNATE COMPLIANCE													
Must match Name/ID used on BMP Design Calculation Sheet													
Design Rainfall Depth													
Design Rainfall Intensity						I = 0.20 in/hr							
Drainage Management Area Tabulation													
Insert additional rows if needed to accommodate all DMAs draining to the BMP													
DMAs	DMA Type/ID	DMA Area (square feet)	Post-Project Surface Type (use pull-down menu)	Effective Imperivous Fraction, I_e	DMA Runoff Factor	DMA Areas x Runoff Factor	Design Rainfall Intensity (in/hr)	Design Flow Rate (cfs)	Proposed Flow Rate (cfs)				
	A	43,364	Roofs	1	0.89	38680.7							
		29506	Concrete or Asphalt	1	0.892	26319.4							
		63459	Concrete or Asphalt	1	0.892	56605.4							
		14893	Ornamental Landscaping	0.1	0.110458	1645.1							
	E	16790	Natural (D Soil)	0.4	0.279712	4696.4							
		168012	Total							127947	0.20	0.6	0.8

Notes:

BMP- A Modular Wetland surface area = 74sf

see bio clean letter in appendix 6

[illegible]

Effective Impervious Fraction

Developed Cover Types	Effective Impervious Fraction
Roofs	1.00
Concrete or Asphalt	1.00
Grouted or Gapless Paving Blocks	1.00
Compacted Soil (e.g. unpaved parking)	0.40
Decomposed Granite	0.40
Permeable Paving Blocks w/ Sand Filled Gap	0.25
Class 2 Base	0.30
Gravel or Class 2 Permeable Base	0.10
Pervious Concrete / Porous Asphalt	0.10
Open and Porous Pavers	0.10
Turf block	0.10
Ornamental Landscaping	0.10
Natural (A Soil)	0.03
Natural (B Soil)	0.15
Natural (C Soil)	0.30
Natural (D Soil)	0.40

Mixed Surface Types

Use this table to determine the effective impervious fraction for the V_{BMP} and Q_{BMP} calculation sheets





SITE SPECIFIC DATA			
PROJECT NUMBER		9428	
PROJECT NAME		LAKEVIEW PLAZA	
PROJECT LOCATION		LAKE ELSENORE, CA	
STRUCTURE ID		----	
TREATMENT REQUIRED			
VOLUME BASED (CF)		FLOW BASED (CFS)	
----		0.80	
TREATMENT HGL AVAILABLE (FT)			N/A
PEAK BYPASS REQUIRED (CFS) – IF APPLICABLE			9.63
PIPE DATA	I.E.	MATERIAL	DIAMETER
INLET PIPE 1	1268.60	N/K	18”
INLET PIPE 2	N/A	N/A	N/A
OUTLET PIPE	1266.20	N/K	18”
	PRETREATMENT	BIOFILTRATION	DISCHARGE
RIM ELEVATION	1273.70	1273.70	1273.70
SURFACE LOAD	DIRECT TRAFFIC	DIRECT TRAFFIC	DIRECT TRAFFIC
FRAME & COVER	3 EA Ø30”	2 EA 36”X60”, 36”X36”	Ø24”
WETLANDMEDIA VOLUME (CY)			TBD
WETLANDMEDIA DELIVERY METHOD			PER CONTRACT
ORIFICE SIZE (DIA. INCHES)			TBD
NOTES: PRELIMINARY. NOT FOR CONSTRUCTION.			

INSTALLATION NOTES

- CONTRACTOR TO PROVIDE ALL LABOR, EQUIPMENT, MATERIALS AND INCIDENTALS REQUIRED TO OFFLOAD AND INSTALL THE SYSTEM AND APPURTENANCES IN ACCORDANCE WITH THIS DRAWING AND THE MANUFACTURERS SPECIFICATIONS, UNLESS OTHERWISE STATED IN MANUFACTURERS CONTRACT.
- UNIT MUST BE INSTALLED ON LEVEL BASE. MANUFACTURER RECOMMENDS A MINIMUM 6" LEVEL ROCK BASE UNLESS SPECIFIED BY THE PROJECT ENGINEER. CONTRACTOR IS RESPONSIBLE TO VERIFY PROJECT ENGINEERS RECOMMENDED BASE SPECIFICATIONS.
- ALL PIPES MUST BE FLUSH WITH INSIDE SURFACE OF CONCRETE. (PIPES CANNOT INTRUDE BEYOND FLUSH). INVERT OF OUTFLOW PIPE MUST BE FLUSH WITH DISCHARGE CHAMBER FLOOR. ALL GAPS AROUND PIPES SHALL BE SEALED WATER TIGHT WITH A NON-SHRINK GROUT PER MANUFACTURERS STANDARD CONNECTION DETAIL AND SHALL MEET OR EXCEED REGIONAL PIPE CONNECTION STANDARDS.
- CONTRACTOR TO SUPPLY AND INSTALL ALL EXTERNAL CONNECTING PIPES.
- CONTRACTOR RESPONSIBLE FOR INSTALLATION OF ALL RISERS, MANHOLES, AND HATCHES. CONTRACTOR TO GROUT ALL MANHOLES AND HATCHES TO MATCH FINISHED SURFACE UNLESS SPECIFIED OTHERWISE.
- DRIP OR SPRAY IRRIGATION REQUIRED ON ALL UNITS WITH VEGETATION.
- CONTRACTOR RESPONSIBLE FOR CONTACTING MODULAR WETLANDS FOR ACTIVATION OF UNIT. MANUFACTURES WARRANTY IS VOID WITH OUT PROPER ACTIVATION BY A MODULAR WETLANDS REPRESENTATIVE.

GENERAL NOTES

- MANUFACTURER TO PROVIDE ALL MATERIALS UNLESS OTHERWISE NOTED.
- ALL DIMENSIONS, ELEVATIONS, SPECIFICATIONS AND CAPACITIES ARE SUBJECT TO CHANGE. FOR PROJECT SPECIFIC DRAWINGS DETAILING EXACT DIMENSIONS, WEIGHTS AND ACCESSORIES PLEASE CONTACT MANUFACTURER.

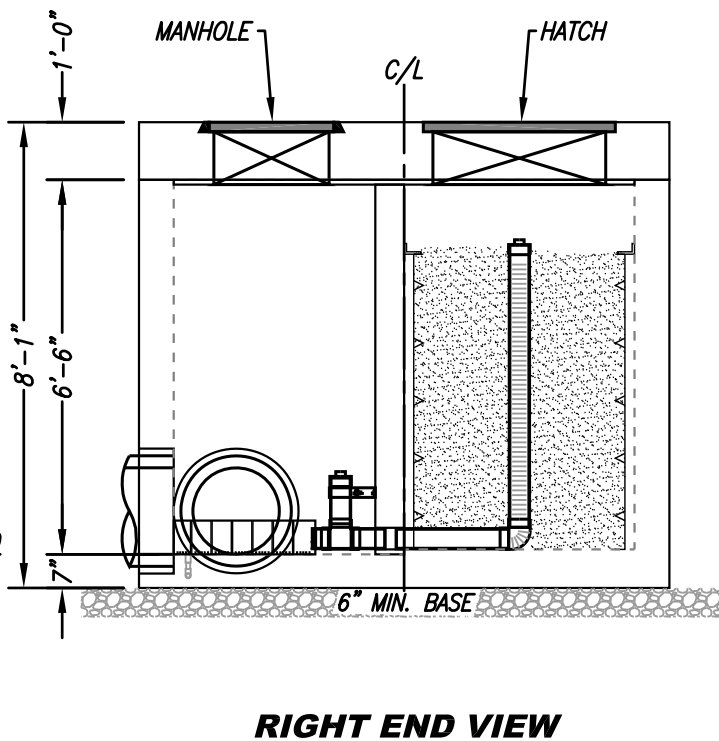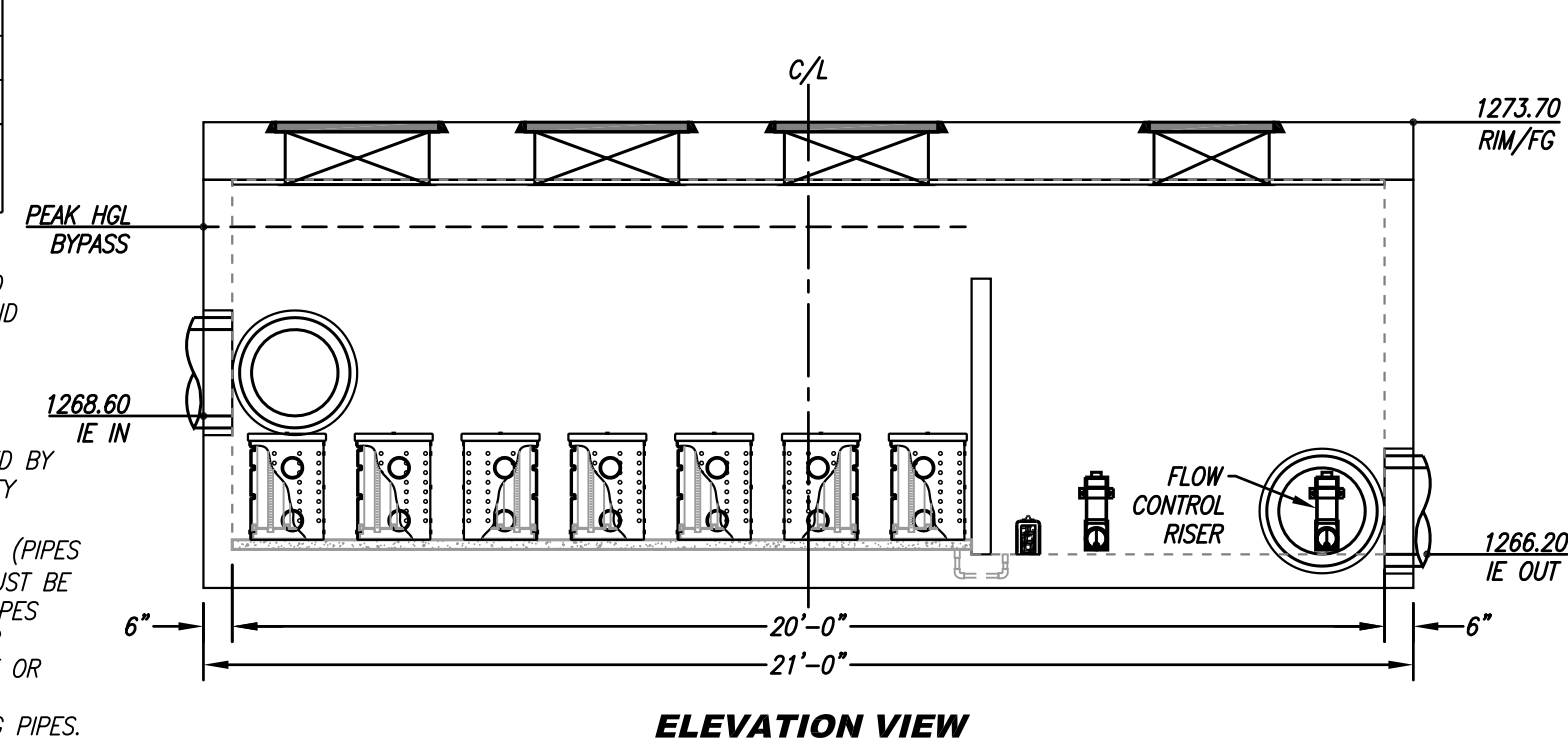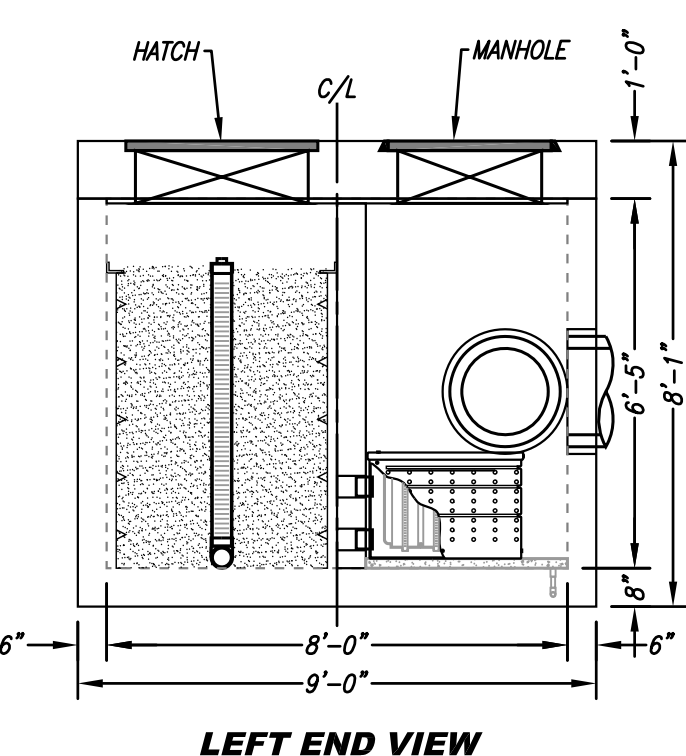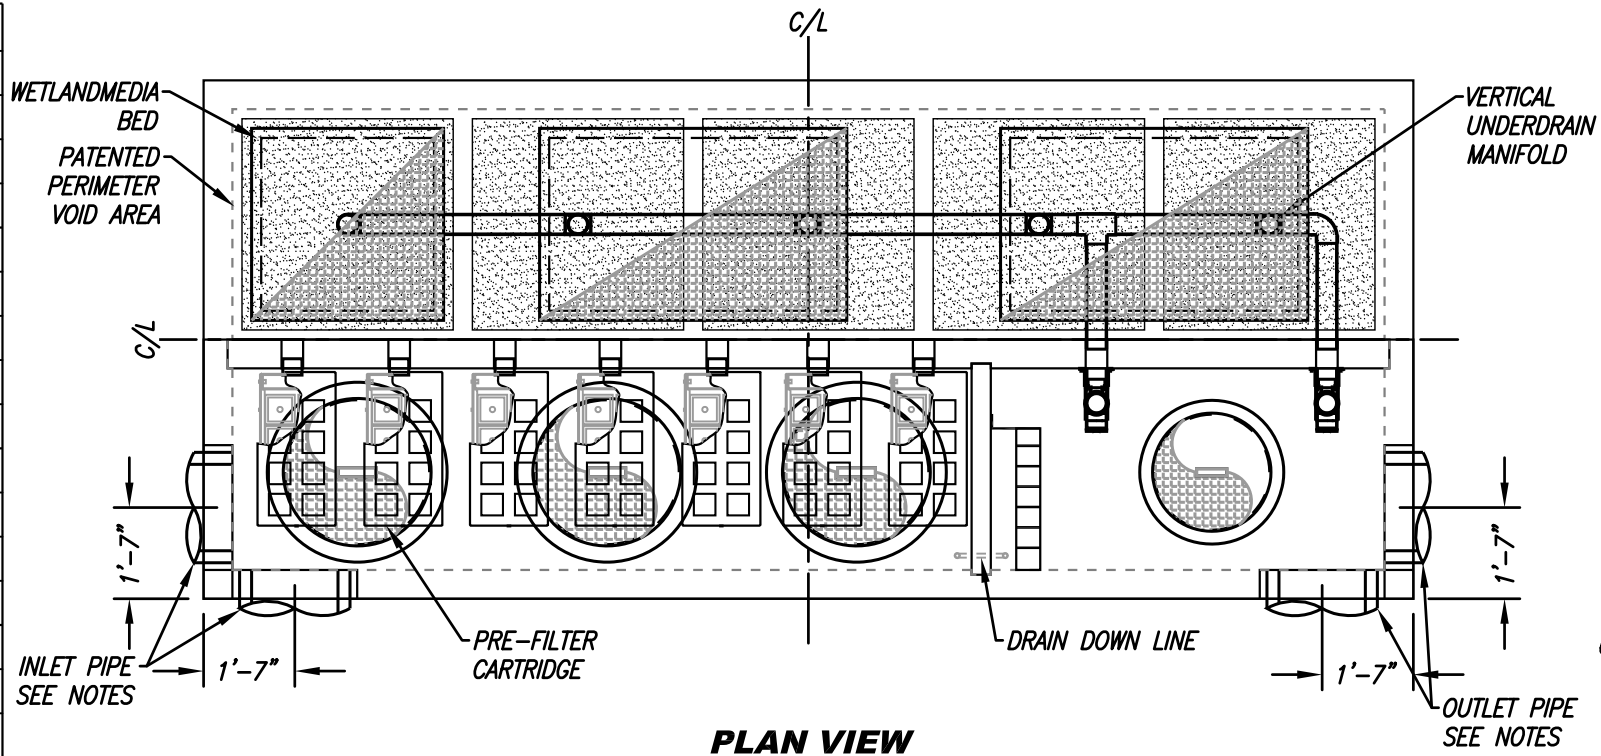

TREATMENT FLOW (CFS)	0.800
OPERATING HEAD (FT)	4.7
PRETREATMENT LOADING RATE (GPM/SF)	2.0
WETLAND MEDIA LOADING RATE (GPM/SF)	1.0

THE PRODUCT DESCRIBED MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS: 7,425,262; 7,470,362; 7,674,378; 8,303,816; RELATED FOREIGN PATENTS OR OTHER PATENTS PENDING

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MODULAR WETLANDS SYSTEMS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MODULAR WETLANDS SYSTEMS IS PROHIBITED.

Bio Clean
A Forterra Company

MWS-L-8-20-V-UG-HC
STORMWATER BIOFILTRATION SYSTEM
STANDARD DETAIL



A Forterra Company

Modular Wetlands[®] System Linear

A Stormwater Biofiltration Solution



OVERVIEW


The Bio Clean Modular Wetlands® System Linear represents a pioneering breakthrough in stormwater technology as the only biofiltration system to utilize patented horizontal flow, allowing for a smaller footprint, higher treatment capacity, and a wide range of versatility. While most biofilters use little or no pretreatment, the Modular Wetlands® incorporates an advanced pretreatment chamber that includes separation and pre-filter cartridges. In this chamber, sediment and hydrocarbons are removed from runoff before entering the biofiltration chamber, reducing maintenance costs and improving performance.

Horizontal flow also gives the system the unique ability to adapt to the environment through a variety of configurations, bypass orientations, and diversion applications.

The Urban Impact

For hundreds of years, natural wetlands surrounding our shores have played an integral role as nature’s stormwater treatment system. But as cities grow and develop, our environment’s natural filtration systems are blanketed with impervious roads, rooftops, and parking lots.

Bio Clean understands this loss and has spent years re-establishing nature’s presence in urban areas, and rejuvenating waterways with the Modular Wetlands® System Linear.

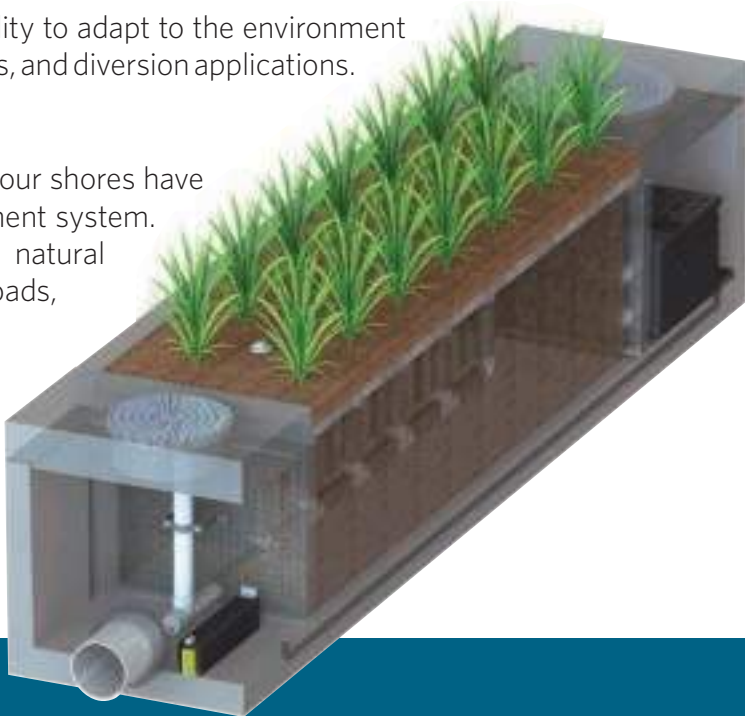

PERFORMANCE

The Modular Wetlands® continues to outperform other treatment methods with superior pollutant removal for TSS, heavy metals, nutrients, hydrocarbons, and bacteria. Since 2007 the Modular Wetlands® has been field tested on numerous sites across the country and is proven to effectively remove pollutants through a combination of physical, chemical, and biological filtration processes. In fact, the Modular Wetlands® harnesses some of the same biological processes found in natural wetlands in order to collect, transform, and remove even the most harmful pollutants.

66% REMOVAL OF DISSOLVED ZINC	69% REMOVAL OF TOTAL ZINC	38% REMOVAL OF DISSOLVED COPPER	64% REMOVAL OF TOTAL PHOSPHORUS	
45% REMOVAL OF NITROGEN	50% REMOVAL OF TOTAL COPPER	95% REMOVAL OF MOTOR OIL	67% REMOVAL OF ORTHO PHOSPHORUS	85% REMOVAL OF TSS

APPROVALS

The Modular Wetlands® System Linear has successfully met years of challenging technical reviews and testing from some of the most prestigious and demanding agencies in the nation and perhaps the world. Here is a list of some of the most high-profile approvals, certifications, and verifications from around the country.



Washington State Department of Ecology TAPE Approved

The MWS Linear is approved for General Use Level Designation (GULD) for Basic, Enhanced, and Phosphorus treatment at 1 gpm/ft² loading rate. The highest performing BMP on the market for all main pollutant categories.



California Water Resources Control Board, Full Capture Certification

The Modular Wetlands® System is the first biofiltration system to receive certification as a full capture trash treatment control device.



Virginia Department of Environmental Quality, Assignment

The Virginia Department of Environmental Quality assigned the MWS Linear the highest phosphorus removal rating for manufactured treatment devices to meet the new Virginia Stormwater Management Program (VSMP) regulation technical criteria.



Maryland Department of the Environment, Approved ESD

Granted Environmental Site Design (ESD) status for new construction, redevelopment, and retrofitting when designed in accordance with the design manual.



MASTEP Evaluation

The University of Massachusetts at Amherst – Water Resources Research Center issued a technical evaluation report noting removal rates up to 84% TSS, 70% total phosphorus, 68.5% total zinc, and more.



Rhode Island Department of Environmental Management, Approved BMP

Approved as an authorized BMP and noted to achieve the following minimum removal efficiencies: 85% TSS, 60% pathogens, 30% total phosphorus, and 30% total nitrogen.

ADVANTAGES

- HORIZONTAL FLOW BIOFILTRATION
- GREATER FILTER SURFACE AREA
- PRETREATMENT CHAMBER
- PATENTED PERIMETER VOID AREA
- FLOW CONTROL
- NO DEPRESSED PLANTER AREA
- AUTO DRAINDOWN MEANS NO MOSQUITO VECTOR

OPERATION

The Modular Wetlands® System Linear is the most efficient and versatile biofiltration system on the market, and it is the only system with horizontal flow which:

- Improves performance
- Reduces footprint
- Minimizes maintenance

Figure 1 & Figure 2 illustrate the invaluable benefits of horizontal flow and the multiple treatment stages.

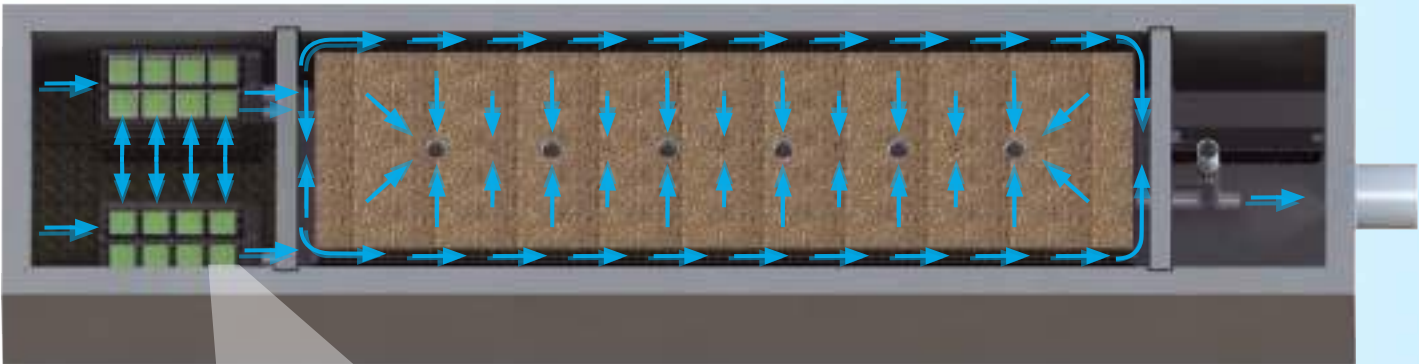


Figure 2,
Top View

2x to 3x more surface area than traditional downward flow bioretention systems.

1 PRETREATMENT

SEPARATION

- Trash, sediment, and debris are separated before entering the pre-filter cartridges
- Designed for easy maintenance access

PRE-FILTER CARTRIDGES

- Over 25 sq. ft. of surface area per cartridge
- Utilizes BioMediaGREEN™ filter material
- Removes over 80% of TSS and 90% of hydrocarbons
- Prevents pollutants that cause clogging from migrating to the biofiltration chamber

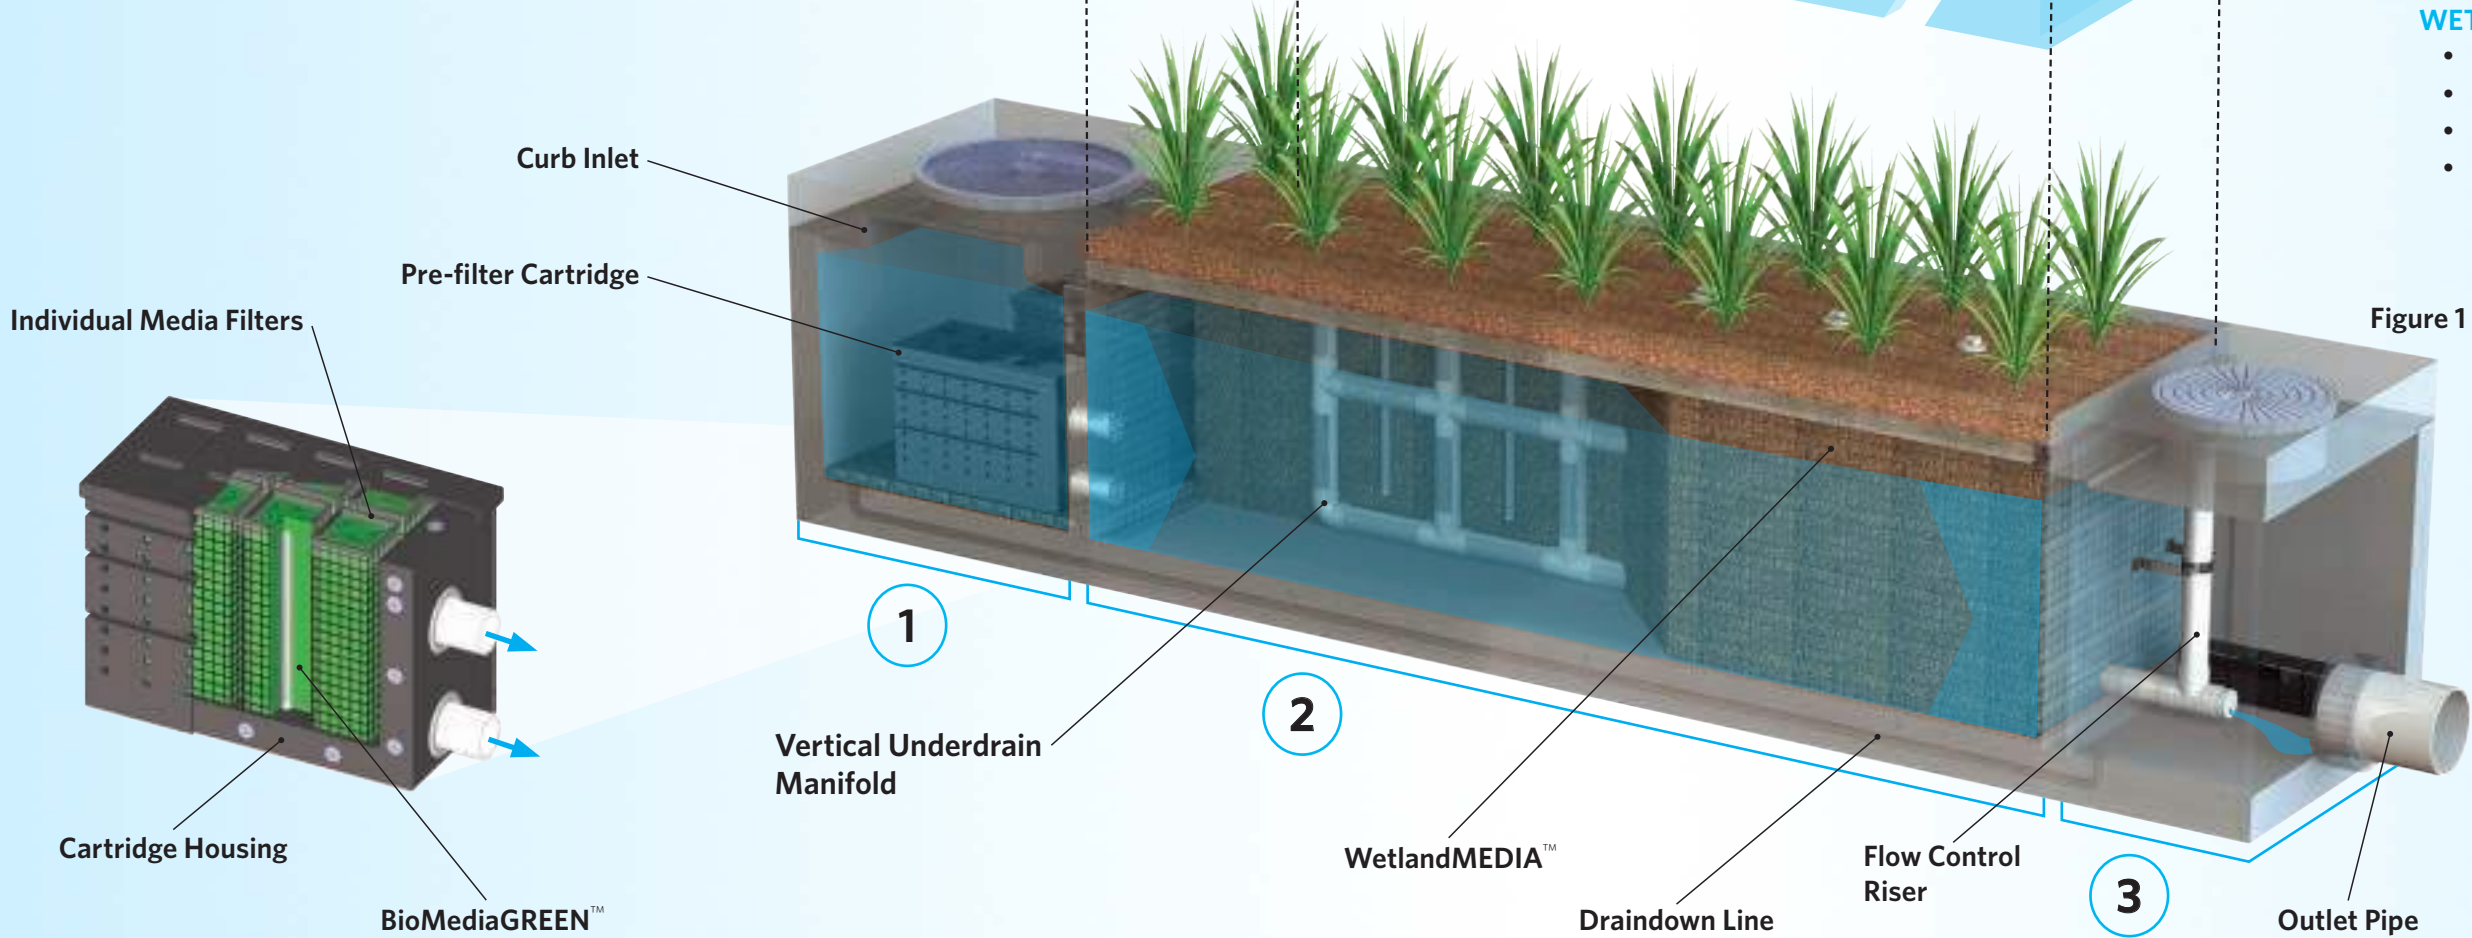


Figure 1

2 BIOFILTRATION

HORIZONTAL FLOW

- Less clogging than downward flow biofilters
- Water flow is subsurface
- Improves biological filtration

PATENTED PERIMETER VOID AREA

- Vertically extends void area between the walls and the WetlandMEDIA™ on all four sides
- Maximizes surface area of the media for higher treatment capacity

WETLANDMEDIA

- Contains no organics and removes phosphorus
- Greater surface area and 48% void space
- Maximum evapotranspiration
- High ion exchange capacity and lightweight

3 DISCHARGE

FLOW CONTROL

- Orifice plate controls flow of water through WetlandMEDIA™ to a level lower than the media's capacity
- Extends the life of the media and improves performance

DRAINDOWN FILTER

- The draindown is an optional feature that completely drains the pretreatment chamber
- Water that drains from the pretreatment chamber between storm events will be treated



CONFIGURATIONS

The Modular Wetlands® System Linear is the preferred biofiltration system of civil engineers across the country due to its versatile design. This highly versatile system has available “pipe-in” options on most models, along with built-in curb or grated inlets for simple integration into your storm drain design.




CURB TYPE

The Curb Type configuration accepts sheet flow through a curb opening and is commonly used along roadways and parking lots. It can be used in sump or flow-by conditions. Length of curb opening varies based on model and size.



GRATE TYPE

The Grate Type configuration offers the same features and benefits as the Curb Type but with a grated/drop inlet above the systems pretreatment chamber. It has the added benefit of allowing pedestrian access over the inlet. ADA-compliant grates are available to assure easy and safe access. The Grate Type can also be used in scenarios where runoff needs to be intercepted on both sides of landscape islands.

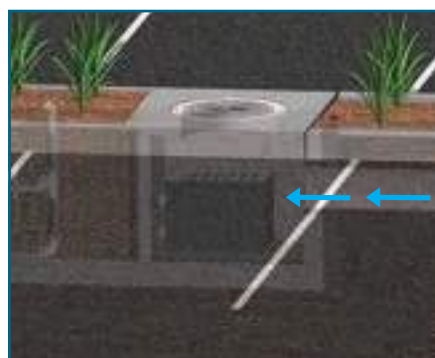

VAULT TYPE

The system’s patented horizontal flow biofilter is able to accept inflow pipes directly into the pretreatment chamber, meaning the Modular Wetlands® can be used in end-of-the-line installations. This greatly improves feasibility over typical decentralized designs that are required with other biofiltration/bioretention systems. Another benefit of the “pipe-in” design is the ability to install the system downstream of underground detention systems to meet water quality volume requirements.



DOWNSPOUT TYPE

The Downspout Type is a variation of the Vault Type and is designed to accept a vertical downspout pipe from rooftop and podium areas. Some models have the option of utilizing an internal bypass, simplifying the overall design. The system can be installed as a raised planter, and the exterior can be stuccoed or covered with other finishes to match the look of adjacent buildings.

ORIENTATIONS

SIDE-BY-SIDE

The Side-By-Side orientation places the pretreatment and discharge chamber adjacent to one another with the biofiltration chamber running parallel on either side. This minimizes the system length, providing a highly compact footprint. It has been proven useful in situations such as streets with directly adjacent sidewalks, as half of the system can be placed under that sidewalk. This orientation also offers internal bypass options as discussed below.



END-TO-END

The End-To-End orientation places the pretreatment and discharge chambers on opposite ends of the biofiltration chamber, therefore minimizing the width of the system to 5 ft. (outside dimension). This orientation is perfect for linear projects and street retrofits where existing utilities and sidewalks limit the amount of space available for installation. One limitation of this orientation is that bypass must be external.



BYPASS

INTERNAL BYPASS WEIR (SIDE-BY-SIDE ONLY)

The Side-By-Side orientation places the pretreatment and discharge chambers adjacent to one another allowing for integration of internal bypass. The wall between these chambers can act as a bypass weir when flows exceed the system’s treatment capacity, thus allowing bypass from the pretreatment chamber directly to the discharge chamber.

EXTERNAL DIVERSION WEIR STRUCTURE


This traditional offline diversion method can be used with the Modular Wetlands® in scenarios where runoff is being piped to the system. These simple and effective structures are generally configured with two outflow pipes. The first is a smaller pipe on the upstream side of the diversion weir - to divert low flows over to the Modular Wetlands® for treatment. The second is the main pipe that receives water once the system has exceeded treatment capacity and water flows over the weir.

FLOW-BY-DESIGN

This method is one in which the system is placed just upstream of a standard curb or grate inlet to intercept the first flush. Higher flows simply pass by the Modular Wetlands® and into the standard inlet downstream.

DVERT LOW FLOW DIVERSION

This simple yet innovative diversion trough can be installed in existing or new curb and grate inlets to divert the first flush to the Modular Wetlands® via pipe. It works similar to a rain gutter and is installed just below the opening into the inlet. It captures the low flows and channels them over

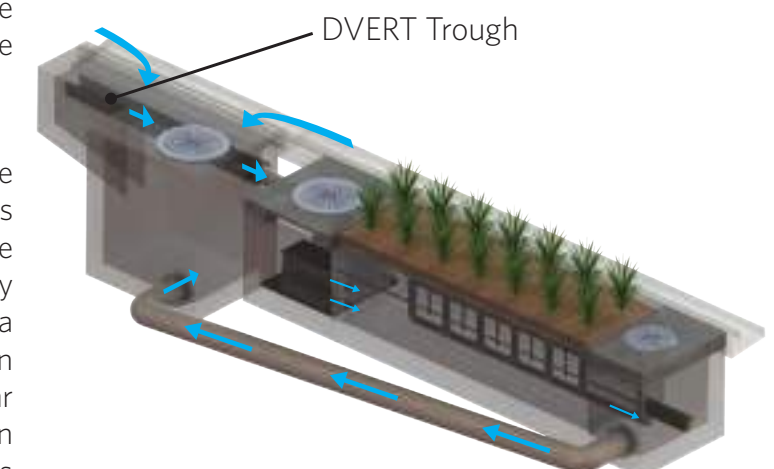

to a connecting pipe exiting out the wall of the inlet and leading to the MWS Linear. The DVERT is perfect for retrofit and green street applications that allow the Modular Wetlands® to be installed anywhere space is available.

SPECIFICATIONS

FLOW-BASED DESIGNS

The Modular Wetlands® System Linear can be used in stand-alone applications to meet treatment flow requirements. Since the Modular Wetlands® is the only biofiltration system that can accept inflow pipes several feet below the surface, it can be used not only in decentralized design applications but also as a large central end-of-the-line application for maximum feasibility.

MODEL #	DIMENSIONS	WETLANDMEDIA SURFACE AREA (sq. ft.)	TREATMENT FLOW RATE (cfs)
MWS-L-4-4	4' x 4'	23	0.052
MWS-L-4-6	4' x 6'	32	0.073
MWS-L-4-8	4' x 8'	50	0.115
MWS-L-4-13	4' x 13'	63	0.144
MWS-L-4-15	4' x 15'	76	0.175
MWS-L-4-17	4' x 17'	90	0.206
MWS-L-4-19	4' x 19'	103	0.237
MWS-L-4-21	4' x 21'	117	0.268
MWS-L-6-8	7' x 9'	64	0.147
MWS-L-8-8	8' x 8'	100	0.230
MWS-L-8-12	8' x 12'	151	0.346
MWS-L-8-16	8' x 16'	201	0.462
MWS-L-8-20	9' x 21'	252	0.577
MWS-L-8-24	9' x 25'	302	0.693
MWS-L-10-20	10' x 20'	302	0.693

VOLUME-BASED DESIGNS

HORIZONTAL FLOW BIOFILTRATION ADVANTAGE



The Modular Wetlands® System Linear offers a unique advantage in the world of biofiltration due to its exclusive horizontal flow design: Volume-Based Design. No other biofilter has the ability to be placed downstream of detention ponds, extended dry detention basins, underground storage systems and permeable paver reservoirs. The systems horizontal flow configuration and built-in orifice control allows it to be installed with just 6” of fall between inlet and outlet pipe for a simple connection to projects with shallow downstream tie-in points. In the example above, the Modular Wetlands® is installed downstream of underground box culvert storage. Designed for the water quality volume, the Modular Wetlands® will treat and discharge the required volume within local draindown time requirements.



DESIGN SUPPORT

Bio Clean engineers are trained to provide you with superior support for all volume sizing configurations throughout the country. Our vast knowledge of state and local regulations allow us to quickly and efficiently size a system to maximize feasibility. Volume control and hydromodification regulations are expanding the need to decrease the cost and size of your biofiltration system. Bio Clean will help you realize these cost savings with the Modular Wetlands®, the only biofilter than can be used downstream of storage BMPs.

ADVANTAGES

- LOWER COST THAN FLOW-BASED DESIGN
- BUILT-IN ORIFICE CONTROL STRUCTURE
- MEETS LID REQUIREMENTS
- WORKS WITH DEEP INSTALLATIONS

APPLICATIONS

The Modular Wetlands® System Linear has been successfully used on numerous new construction and retrofit projects. The system's superior versatility makes it beneficial for a wide range of stormwater and waste water applications - treating rooftops, streetscapes, parking lots, and industrial sites.



INDUSTRIAL

Many states enforce strict regulations for discharges from industrial sites. The Modular Wetlands® has helped various sites meet difficult EPA-mandated effluent limits for dissolved metals and other pollutants.



STREETS

Street applications can be challenging due to limited space. The Modular Wetlands® is very adaptable, and it offers the smallest footprint to work around the constraints of existing utilities on retrofit projects.



COMMERCIAL

Compared to bioretention systems, the Modular Wetlands® can treat far more area in less space, meeting treatment and volume control requirements.



RESIDENTIAL

Low to high density developments can benefit from the versatile design of the Modular Wetlands®. The system can be used in both decentralized LID design and cost-effective end-of-the-line configurations.



PARKING LOTS

Parking lots are designed to maximize space and the Modular Wetlands® 4 ft. standard planter width allows for easy integration into parking lot islands and other landscape medians.



MIXED USE

The Modular Wetlands® can be installed as a raised planter to treat runoff from rooftops or patios, making it perfect for sustainable "live-work" spaces.

More applications include:

- Agriculture
- Reuse
- Low Impact Development
- Waste Water

PLANT SELECTION

Abundant plants, trees, and grasses bring value and an aesthetic benefit to any urban setting, but those in the Modular Wetlands® System Linear do even more - they increase pollutant removal. What's not seen, but very important, is that below grade, the stormwater runoff/flow is being subjected to nature's secret weapon: a dynamic physical, chemical, and biological process working to break down and remove non-point source pollutants. The flow rate is controlled in the Modular Wetlands®, giving the plants more contact time so that pollutants are more successfully decomposed, volatilized, and incorporated into the biomass of the Modular Wetlands'® micro/macro flora and fauna.



A wide range of plants are suitable for use in the Modular Wetlands®, but selections vary by location and climate. View suitable plants by visiting biocleanenvironmental.com/plants.

INSTALLATION



The Modular Wetlands® is simple, easy to install, and has a space-efficient design that offers lower excavation and installation costs compared to traditional tree-box type systems. The structure of the system resembles precast catch basin or utility vaults and is installed in a similar fashion.

The system is delivered fully assembled for quick installation. Generally, the structure can be unloaded and set in place in 15 minutes. Our experienced team of field technicians is available to supervise installations and provide technical support.

MAINTENANCE



Reduce your maintenance costs, man hours, and materials with the Modular Wetlands®. Unlike other biofiltration systems that provide no pretreatment, the Modular Wetlands® is a self-contained treatment train which incorporates simple and effective pretreatment.

Maintenance requirements for the biofilter itself are almost completely eliminated, as the pretreatment chamber removes and isolates trash, sediments, and hydrocarbons. What's left is the simple maintenance of an easily accessible pretreatment chamber that can be cleaned by hand or with a standard vac truck. Only periodic replacement of low-cost media in the pre-filter cartridges is required for long-term operation, and there is absolutely no need to replace expensive biofiltration media.



5796 Armada Drive Suite 250
Carlsbad, CA 92008
855.566.3938
stormwater@forterrabp.com
biocleanenvironmental.com

Appendix 7: Hydromodification

Supporting Detail Relating to Hydrologic Conditions of Concern

Appendix 8: Source Control

Pollutant Sources/Source Control Checklist

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

How to use this worksheet (also see instructions in Section G of the WQMP Template):

1. Review Column 1 and identify which of these potential sources of stormwater pollutants apply to your site. Check each box that applies.
2. Review Column 2 and incorporate all of the corresponding applicable BMPs in your WQMP Exhibit.
3. Review Columns 3 and 4 and incorporate all of the corresponding applicable permanent controls and operational BMPs in your WQMP. Use the format shown in Table G.1 on page 23 of this WQMP Template. Describe your specific BMPs in an accompanying narrative, and explain any special conditions or situations that required omitting BMPs or substituting alternative BMPs for those shown here.

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☒ A. On-site storm drain inlets	☒ Locations of inlets.	☒ Mark all inlets with the words “Only Rain Down the Storm Drain” or similar. Catch Basin Markers may be available from the Riverside County Flood Control and Water Conservation District, call 951.955.1200 to verify.	☒ Maintain and periodically repaint or replace inlet markings. ☒ Provide stormwater pollution prevention information to new site owners, lessees, or operators. ☒ See applicable operational BMPs in Fact Sheet SC-44, “Drainage System Maintenance,” in the CASQA Stormwater Quality Handbooks at www.cabmphandbooks.com ☒ Include the following in lease agreements: “Tenant shall not allow anyone to discharge anything to storm drains or to store or deposit materials so as to create a potential discharge to storm drains.”
☒ B. Interior floor drains and elevator shaft sump pumps		☐ State that interior floor drains and elevator shaft sump pumps will be plumbed to sanitary sewer.	☐ Inspect and maintain drains to prevent blockages and overflow.
☐ C. Interior parking garages		☐ State that parking garage floor drains will be plumbed to the sanitary sewer.	☐ Inspect and maintain drains to prevent blockages and overflow.

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☐ D1. Need for future indoor & structural pest control		☐ Note building design features that discourage entry of pests.	☐ Provide Integrated Pest Management information to owners, lessees, and operators.
☒ D2. Landscape/ Outdoor Pesticide Use	☒ Show locations of native trees or areas of shrubs and ground cover to be undisturbed and retained. ☒ Show self-retaining landscape areas, if any. ☒ Show stormwater treatment and hydrograph modification management BMPs. (See instructions in Chapter 3, Step 5 and guidance in Chapter 5.)	State that final landscape plans will accomplish all of the following. ☒ Preserve existing native trees, shrubs, and ground cover to the maximum extent possible. ☒ Design landscaping to minimize irrigation and runoff, to promote surface infiltration where appropriate, and to minimize the use of fertilizers and pesticides that can contribute to stormwater pollution. ☒ Where landscaped areas are used to retain or detain stormwater, specify plants that are tolerant of saturated soil conditions. ☒ Consider using pest-resistant plants, especially adjacent to hardscape. To insure successful establishment, select plants appropriate to site soils, slopes, climate, sun, wind, rain, land use, air movement, ecological consistency, and plant interactions.	☒ Maintain landscaping using minimum or no pesticides. ☒ See applicable operational BMPs in “What you should know for.....Landscape and Gardening” at http://rcflood.org/stormwater/Error! Hyperlink reference not valid. Provide IPM information to new owners, lessees and operators. ☒

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☐ E. Pools, spas, ponds, decorative fountains, and other water features.	☐ Show location of water feature and a sanitary sewer cleanout in an accessible area within 10 feet. (Exception: Public pools must be plumbed according to County Department of Environmental Health Guidelines.)	If the Co-Permittee requires pools to be plumbed to the sanitary sewer, place a note on the plans and state in the narrative that this connection will be made according to local requirements.	☐ See applicable operational BMPs in "Guidelines for Maintaining Your Swimming Pool, Jacuzzi and Garden Fountain" at http://rcflood.org/stormwater/
☒ F. Food service	☒ For restaurants, grocery stores, and other food service operations, show location (indoors or in a covered area outdoors) of a floor sink or other area for cleaning floor mats, containers, and equipment. ☒ On the drawing, show a note that this drain will be connected to a grease interceptor before discharging to the sanitary sewer.	☒ Describe the location and features of the designated cleaning area. ☒ Describe the items to be cleaned in this facility and how it has been sized to insure that the largest items can be accommodated.	☒ See the brochure, "The Food Service Industry Best Management Practices for: Restaurants, Grocery Stores, Delicatessens and Bakeries" at http://rcflood.org/stormwater/ Provide this brochure to new site owners, lessees, and operators.
☒ G. Refuse areas	☒ Show where site refuse and recycled materials will be handled and stored for pickup. See local municipal requirements for sizes and other details of refuse areas. ☒ If dumpsters or other receptacles are outdoors, show how the designated area will be covered, graded, and paved to prevent run-on and show locations of berms to prevent runoff from the area. ☒ Any drains from dumpsters, compactors, and tallow bin areas shall be connected to a grease removal device before discharge to sanitary sewer.	☒ State how site refuse will be handled and provide supporting detail to what is shown on plans. ☒ State that signs will be posted on or near dumpsters with the words "Do not dump hazardous materials here" or similar.	☒ State how the following will be implemented: Provide adequate number of receptacles. Inspect receptacles regularly; repair or replace leaky receptacles. Keep receptacles covered. Prohibit/prevent dumping of liquid or hazardous wastes. Post "no hazardous materials" signs. Inspect and pick up litter daily and clean up spills immediately. Keep spill control materials available on-site. See Fact Sheet SC-34, "Waste Handling and Disposal" in the CASQA Stormwater Quality Handbooks at www.cabmphandbooks.com

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☐ H. Industrial processes.	☐ Show process area.	☐ If industrial processes are to be located on site, state: “All process activities to be performed indoors. No processes to drain to exterior or to storm drain system.”	☐ See Fact Sheet SC-10, “Non-Stormwater Discharges” in the CASQA Stormwater Quality Handbooks at www.cabmphandbooks.com See the brochure “Industrial & Commercial Facilities Best Management Practices for: Industrial, Commercial Facilities” at http://rcflood.org/stormwater/

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☐ I. Outdoor storage of equipment or materials. (See rows J and K for source control measures for vehicle cleaning, repair, and maintenance.)	☐ Show any outdoor storage areas, including how materials will be covered. Show how areas will be graded and bermed to prevent run-on or run-off from area. ☐ Storage of non-hazardous liquids shall be covered by a roof and/or drain to the sanitary sewer system, and be contained by berms, dikes, liners, or vaults. ☐ Storage of hazardous materials and wastes must be in compliance with the local hazardous materials ordinance and a Hazardous Materials Management Plan for the site.	Include a detailed description of materials to be stored, storage areas, and structural features to prevent pollutants from entering storm drains. Where appropriate, reference documentation of compliance with the requirements of Hazardous Materials Programs for: ▪ Hazardous Waste Generation ▪ Hazardous Materials Release Response and Inventory ▪ California Accidental Release (CalARP) ▪ Aboveground Storage Tank ▪ Uniform Fire Code Article 80 Section 103(b) & (c) 1991 ▪ Underground Storage Tank www.cchealth.org/groups/hazmat/	☐ See the Fact Sheets SC-31, “Outdoor Liquid Container Storage” and SC-33, “Outdoor Storage of Raw Materials ” in the CASQA Stormwater Quality Handbooks at www.cabmphandbooks.com

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☐ J. Vehicle and Equipment Cleaning	☐ Show on drawings as appropriate: (1) Commercial/industrial facilities having vehicle/equipment cleaning needs shall either provide a covered, bermed area for washing activities or discourage vehicle/equipment washing by removing hose bibs and installing signs prohibiting such uses. (2) Multi-dwelling complexes shall have a paved, bermed, and covered car wash area (unless car washing is prohibited on-site and hoses are provided with an automatic shut-off to discourage such use). (3) Washing areas for cars, vehicles, and equipment shall be paved, designed to prevent run-on to or runoff from the area, and plumbed to drain to the sanitary sewer. (4) Commercial car wash facilities shall be designed such that no runoff from the facility is discharged to the storm drain system. Wastewater from the facility shall discharge to the sanitary sewer, or a wastewater reclamation system shall be installed.	☐ If a car wash area is not provided, describe any measures taken to discourage on-site car washing and explain how these will be enforced.	Describe operational measures to implement the following (if applicable): ☐ Wastewater from vehicle and equipment washing operations shall not be discharged to the storm drain system. Refer to “Outdoor Cleaning Activities and Professional Mobile Service Providers” for many of the Potential Sources of Runoff Pollutants categories below. Brochure can be found at http://rcflood.org/stormwater/ ☐ Car dealerships and similar may rinse cars with water only.

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☐ K. Vehicle/Equipment Repair and Maintenance	☐ Accommodate all vehicle equipment repair and maintenance indoors. Or designate an outdoor work area and design the area to prevent run-on and runoff of stormwater. ☐ Show secondary containment for exterior work areas where motor oil, brake fluid, gasoline, diesel fuel, radiator fluid, acid-containing batteries or other hazardous materials or hazardous wastes are used or stored. Drains shall not be installed within the secondary containment areas. ☐ Add a note on the plans that states either (1) there are no floor drains, or (2) floor drains are connected to wastewater pretreatment systems prior to discharge to the sanitary sewer and an industrial waste discharge permit will be obtained.	☐ State that no vehicle repair or maintenance will be done outdoors, or else describe the required features of the outdoor work area. ☐ State that there are no floor drains or if there are floor drains, note the agency from which an industrial waste discharge permit will be obtained and that the design meets that agency's requirements. ☐ State that there are no tanks, containers or sinks to be used for parts cleaning or rinsing or, if there are, note the agency from which an industrial waste discharge permit will be obtained and that the design meets that agency's requirements.	In the Stormwater Control Plan, note that all of the following restrictions apply to use the site: ☐ No person shall dispose of, nor permit the disposal, directly or indirectly of vehicle fluids, hazardous materials, or rinsewater from parts cleaning into storm drains. ☐ No vehicle fluid removal shall be performed outside a building, nor on asphalt or ground surfaces, whether inside or outside a building, except in such a manner as to ensure that any spilled fluid will be in an area of secondary containment. Leaking vehicle fluids shall be contained or drained from the vehicle immediately. ☐ No person shall leave unattended drip parts or other open containers containing vehicle fluid, unless such containers are in use or in an area of secondary containment. Refer to "Automotive Maintenance & Car Care Best Management Practices for Auto Body Shops, Auto Repair Shops, Car Dealerships, Gas Stations and Fleet Service Operations". Brochure can be found at http://rcflood.org/stormwater/ Refer to Outdoor Cleaning Activities and Professional Mobile Service Providers for many of the Potential Sources of Runoff Pollutants categories below. Brochure can be found at http://rcflood.org/stormwater/

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☐ L. Fuel Dispensing Areas	☐ Fueling areas ⁶ shall have impermeable floors (i.e., portland cement concrete or equivalent smooth impervious surface) that are: a) graded at the minimum slope necessary to prevent ponding; and b) separated from the rest of the site by a grade break that prevents run-on of stormwater to the maximum extent practicable. ☐ Fueling areas shall be covered by a canopy that extends a minimum of ten feet in each direction from each pump. [Alternative: The fueling area must be covered and the cover's minimum dimensions must be equal to or greater than the area within the grade break or fuel dispensing area ¹ .] The canopy [or cover] shall not drain onto the fueling area.		☐ The property owner shall dry sweep the fueling area routinely. ☐ See the Fact Sheet SD-30 , “Fueling Areas” in the CASQA Stormwater Quality Handbooks at www.cabmphandbooks.com

⁶ The fueling area shall be defined as the area extending a minimum of 6.5 feet from the corner of each fuel dispenser or the length at which the hose and nozzle assembly may be operated plus a minimum of one foot, whichever is greater.

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☐ M. Loading Docks	☐ Show a preliminary design for the loading dock area, including roofing and drainage. Loading docks shall be covered and/or graded to minimize run-on to and runoff from the loading area. Roof downspouts shall be positioned to direct stormwater away from the loading area. Water from loading dock areas shall be drained to the sanitary sewer, or diverted and collected for ultimate discharge to the sanitary sewer. ☐ Loading dock areas draining directly to the sanitary sewer shall be equipped with a spill control valve or equivalent device, which shall be kept closed during periods of operation. ☐ Provide a roof overhang over the loading area or install door skirts (cowling) at each bay that enclose the end of the trailer.		☐ Move loaded and unloaded items indoors as soon as possible. ☐ See Fact Sheet SC-30, “Outdoor Loading and Unloading,” in the CASQA Stormwater Quality Handbooks at www.cabmphandbooks.com

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
☒ N. Fire Sprinkler Test Water		☐ Provide a means to drain fire sprinkler test water to the sanitary sewer.	☐ See the note in Fact Sheet SC-41, “Building and Grounds Maintenance,” in the CASQA Stormwater Quality Handbooks at www.cabmphandbooks.com
O. Miscellaneous Drain or Wash Water or Other Sources ☐ Boiler drain lines ☒ Condensate drain lines ☒ Rooftop equipment ☐ Drainage sumps ☒ Roofing, gutters, and trim. ☐ Other sources		☐ Boiler drain lines shall be directly or indirectly connected to the sanitary sewer system and may not discharge to the storm drain system. ☐ Condensate drain lines may discharge to landscaped areas if the flow is small enough that runoff will not occur. Condensate drain lines may not discharge to the storm drain system. Rooftop equipment with potential to produce pollutants shall be ☐ roofed and/or have secondary containment. Any drainage sumps on-site shall ☐ feature a sediment sump to reduce the quantity of sediment in pumped water. ☐ Avoid roofing, gutters, and trim made of copper or other unprotected metals that may leach into runoff. Include controls for other sources as specified by local reviewer.	

STORMWATER POLLUTANT SOURCES/SOURCE CONTROL CHECKLIST

IF THESE SOURCES WILL BE ON THE PROJECT SITE ...	... THEN YOUR WQMP SHOULD INCLUDE THESE SOURCE CONTROL BMPs, AS APPLICABLE		
1 Potential Sources of Runoff Pollutants	2 Permanent Controls—Show on WQMP Drawings	3 Permanent Controls—List in WQMP Table and Narrative	4 Operational BMPs—Include in WQMP Table and Narrative
✕ P. Plazas, sidewalks, and parking lots.			✕ Sweep plazas, sidewalks, and parking lots regularly to prevent accumulation of litter and debris. Collect debris from pressure washing to prevent entry into the storm drain system. Collect washwater containing any cleaning agent or degreaser and discharge to the sanitary sewer not to a storm drain.

Appendix 9: O&M

Operation and Maintenance Plan and Documentation of Finance, Maintenance and Recording Mechanisms

Appendix 10: Educational Materials

BMP Fact Sheets, Maintenance Guidelines and Other End-User BMP Information

Site Design & Landscape Planning SD-10



Design Objectives

- ☒ Maximize Infiltration
- ☒ Provide Retention
- ☒ Slow Runoff
- ☒ Minimize Impervious Land Coverage
- Prohibit Dumping of Improper Materials
- Contain Pollutants
- Collect and Convey

Description

Each project site possesses unique topographic, hydrologic, and vegetative features, some of which are more suitable for development than others. Integrating and incorporating appropriate landscape planning methodologies into the project design is the most effective action that can be done to minimize surface and groundwater contamination from stormwater.

Approach

Landscape planning should couple consideration of land suitability for urban uses with consideration of community goals and projected growth. Project plan designs should conserve natural areas to the extent possible, maximize natural water storage and infiltration opportunities, and protect slopes and channels.

Suitable Applications

Appropriate applications include residential, commercial and industrial areas planned for development or redevelopment.

Design Considerations

Design requirements for site design and landscapes planning should conform to applicable standards and specifications of agencies with jurisdiction and be consistent with applicable General Plan and Local Area Plan policies.



SD-10 Site Design & Landscape Planning

Designing New Installations

Begin the development of a plan for the landscape unit with attention to the following general principles:

- Formulate the plan on the basis of clearly articulated community goals. Carefully identify conflicts and choices between retaining and protecting desired resources and community growth.
- Map and assess land suitability for urban uses. Include the following landscape features in the assessment: wooded land, open unwooded land, steep slopes, erosion-prone soils, foundation suitability, soil suitability for waste disposal, aquifers, aquifer recharge areas, wetlands, floodplains, surface waters, agricultural lands, and various categories of urban land use. When appropriate, the assessment can highlight outstanding local or regional resources that the community determines should be protected (e.g., a scenic area, recreational area, threatened species habitat, farmland, fish run). Mapping and assessment should recognize not only these resources but also additional areas needed for their sustenance.

Project plan designs should conserve natural areas to the extent possible, maximize natural water storage and infiltration opportunities, and protect slopes and channels.

Conserve Natural Areas during Landscape Planning

If applicable, the following items are required and must be implemented in the site layout during the subdivision design and approval process, consistent with applicable General Plan and Local Area Plan policies:

- Cluster development on least-sensitive portions of a site while leaving the remaining land in a natural undisturbed condition.
- Limit clearing and grading of native vegetation at a site to the minimum amount needed to build lots, allow access, and provide fire protection.
- Maximize trees and other vegetation at each site by planting additional vegetation, clustering tree areas, and promoting the use of native and/or drought tolerant plants.
- Promote natural vegetation by using parking lot islands and other landscaped areas.
- Preserve riparian areas and wetlands.

Maximize Natural Water Storage and Infiltration Opportunities Within the Landscape Unit

- Promote the conservation of forest cover. Building on land that is already deforested affects basin hydrology to a lesser extent than converting forested land. Loss of forest cover reduces interception storage, detention in the organic forest floor layer, and water losses by evapotranspiration, resulting in large peak runoff increases and either their negative effects or the expense of countering them with structural solutions.
- Maintain natural storage reservoirs and drainage corridors, including depressions, areas of permeable soils, swales, and intermittent streams. Develop and implement policies and

Site Design & Landscape Planning SD-10

regulations to discourage the clearing, filling, and channelization of these features. Utilize them in drainage networks in preference to pipes, culverts, and engineered ditches.

- Evaluating infiltration opportunities by referring to the stormwater management manual for the jurisdiction and pay particular attention to the selection criteria for avoiding groundwater contamination, poor soils, and hydrogeological conditions that cause these facilities to fail. If necessary, locate developments with large amounts of impervious surfaces or a potential to produce relatively contaminated runoff away from groundwater recharge areas.

Protection of Slopes and Channels during Landscape Design

- Convey runoff safely from the tops of slopes.
- Avoid disturbing steep or unstable slopes.
- Avoid disturbing natural channels.
- Stabilize disturbed slopes as quickly as possible.
- Vegetate slopes with native or drought tolerant vegetation.
- Control and treat flows in landscaping and/or other controls prior to reaching existing natural drainage systems.
- Stabilize temporary and permanent channel crossings as quickly as possible, and ensure that increases in run-off velocity and frequency caused by the project do not erode the channel.
- Install energy dissipaters, such as riprap, at the outlets of new storm drains, culverts, conduits, or channels that enter unlined channels in accordance with applicable specifications to minimize erosion. Energy dissipaters shall be installed in such a way as to minimize impacts to receiving waters.
- Line on-site conveyance channels where appropriate, to reduce erosion caused by increased flow velocity due to increases in tributary impervious area. The first choice for linings should be grass or some other vegetative surface, since these materials not only reduce runoff velocities, but also provide water quality benefits from filtration and infiltration. If velocities in the channel are high enough to erode grass or other vegetative linings, riprap, concrete, soil cement, or geo-grid stabilization are other alternatives.
- Consider other design principles that are comparable and equally effective.

Redeveloping Existing Installations

Various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.) define “redevelopment” in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land disturbing activities with structural or impervious surfaces. The definition of “redevelopment” must be consulted to determine whether or not the requirements for new development apply to areas intended for redevelopment. If the definition applies, the steps outlined under “designing new installations” above should be followed.

SD-10 Site Design & Landscape Planning

Redevelopment may present significant opportunity to add features which had not previously been implemented. Examples include incorporation of depressions, areas of permeable soils, and swales in newly redeveloped areas. While some site constraints may exist due to the status of already existing infrastructure, opportunities should not be missed to maximize infiltration, slow runoff, reduce impervious areas, disconnect directly connected impervious areas.

Other Resources

A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Stormwater Management Manual for Western Washington, Washington State Department of Ecology, August 2001.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.



Rain Garden

Design Objectives

- ☒ Maximize Infiltration
- ☒ Provide Retention
- ☒ Slow Runoff
- Minimize Impervious Land Coverage
- Prohibit Dumping of Improper Materials
- ☒ Contain Pollutants
- Collect and Convey

Description

Various roof runoff controls are available to address stormwater that drains off rooftops. The objective is to reduce the total volume and rate of runoff from individual lots, and retain the pollutants on site that may be picked up from roofing materials and atmospheric deposition. Roof runoff controls consist of directing the roof runoff away from paved areas and mitigating flow to the storm drain system through one of several general approaches: cisterns or rain barrels; dry wells or infiltration trenches; pop-up emitters, and foundation planting. The first three approaches require the roof runoff to be contained in a gutter and downspout system. Foundation planting provides a vegetated strip under the drip line of the roof.

Approach

Design of individual lots for single-family homes as well as lots for higher density residential and commercial structures should consider site design provisions for containing and infiltrating roof runoff or directing roof runoff to vegetative swales or buffer areas. Retained water can be reused for watering gardens, lawns, and trees. Benefits to the environment include reduced demand for potable water used for irrigation, improved stormwater quality, increased groundwater recharge, decreased runoff volume and peak flows, and decreased flooding potential.

Suitable Applications

Appropriate applications include residential, commercial and industrial areas planned for development or redevelopment.

Design Considerations

Designing New Installations

Cisterns or Rain Barrels

One method of addressing roof runoff is to direct roof downspouts to cisterns or rain barrels. A cistern is an above ground storage vessel with either a manually operated valve or a permanently open outlet. Roof runoff is temporarily stored and then released for irrigation or infiltration between storms. The number of rain



barrels needed is a function of the rooftop area. Some low impact developers recommend that every house have at least 2 rain barrels, with a minimum storage capacity of 1000 liters. Roof barrels serve several purposes including mitigating the first flush from the roof which has a high volume, amount of contaminants, and thermal load. Several types of rain barrels are commercially available. Consideration must be given to selecting rain barrels that are vector proof and childproof. In addition, some barrels are designed with a bypass valve that filters out grit and other contaminants and routes overflow to a soak-away pit or rain garden.

If the cistern has an operable valve, the valve can be closed to store stormwater for irrigation or infiltration between storms. This system requires continual monitoring by the resident or grounds crews, but provides greater flexibility in water storage and metering. If a cistern is provided with an operable valve and water is stored inside for long periods, the cistern must be covered to prevent mosquitoes from breeding.

A cistern system with a permanently open outlet can also provide for metering stormwater runoff. If the cistern outlet is significantly smaller than the size of the downspout inlet (say $\frac{1}{4}$ to $\frac{1}{2}$ inch diameter), runoff will build up inside the cistern during storms, and will empty out slowly after peak intensities subside. This is a feasible way to mitigate the peak flow increases caused by rooftop impervious land coverage, especially for the frequent, small storms.

Dry wells and Infiltration Trenches

Roof downspouts can be directed to dry wells or infiltration trenches. A dry well is constructed by excavating a hole in the ground and filling it with an open graded aggregate, and allowing the water to fill the dry well and infiltrate after the storm event. An underground connection from the downspout conveys water into the dry well, allowing it to be stored in the voids. To minimize sedimentation from lateral soil movement, the sides and top of the stone storage matrix can be wrapped in a permeable filter fabric, though the bottom may remain open. A perforated observation pipe can be inserted vertically into the dry well to allow for inspection and maintenance.

In practice, dry wells receiving runoff from single roof downspouts have been successful over long periods because they contain very little sediment. They must be sized according to the amount of rooftop runoff received, but are typically 4 to 5 feet square, and 2 to 3 feet deep, with a minimum of 1-foot soil cover over the top (maximum depth of 10 feet).

To protect the foundation, dry wells must be set away from the building at least 10 feet. They must be installed in solids that accommodate infiltration. In poorly drained soils, dry wells have very limited feasibility.

Infiltration trenches function in a similar manner and would be particularly effective for larger roof areas. An infiltration trench is a long, narrow, rock-filled trench with no outlet that receives stormwater runoff. These are described under Treatment Controls.

Pop-up Drainage Emitter

Roof downspouts can be directed to an underground pipe that daylights some distance from the building foundation, releasing the roof runoff through a pop-up emitter. Similar to a pop-up irrigation head, the emitter only opens when there is flow from the roof. The emitter remains flush to the ground during dry periods, for ease of lawn or landscape maintenance.

Foundation Planting

Landscape planting can be provided around the base to allow increased opportunities for stormwater infiltration and protect the soil from erosion caused by concentrated sheet flow coming off the roof. Foundation plantings can reduce the physical impact of water on the soil and provide a subsurface matrix of roots that encourage infiltration. These plantings must be sturdy enough to tolerate the heavy runoff sheet flows, and periodic soil saturation.

Redeveloping Existing Installations

Various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.) define “redevelopment” in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land disturbing activities with structural or impervious surfaces. The definition of “redevelopment” must be consulted to determine whether or not the requirements for new development apply to areas intended for redevelopment. If the definition applies, the steps outlined under “designing new installations” above should be followed.

Supplemental Information

Examples

- City of Ottawa’s Water Links Surface –Water Quality Protection Program
- City of Toronto Downspout Disconnection Program
- City of Boston, MA, Rain Barrel Demonstration Program

Other Resources

Hager, Marty Catherine, Stormwater, “Low-Impact Development”, January/February 2003.
www.stormh2o.com

Low Impact Urban Design Tools, Low Impact Development Design Center, Beltsville, MD.
www.lid-stormwater.net

Start at the Source, Bay Area Stormwater Management Agencies Association, 1999 Edition



Design Objectives

- ☒ Maximize Infiltration
- ☒ Provide Retention
- ☒ Slow Runoff
- Minimize Impervious Land Coverage
- Prohibit Dumping of Improper Materials
- Contain Pollutants
- Collect and Convey

Description

Irrigation water provided to landscaped areas may result in excess irrigation water being conveyed into stormwater drainage systems.

Approach

Project plan designs for development and redevelopment should include application methods of irrigation water that minimize runoff of excess irrigation water into the stormwater conveyance system.

Suitable Applications

Appropriate applications include residential, commercial and industrial areas planned for development or redevelopment. (Detached residential single-family homes are typically excluded from this requirement.)

Design Considerations

Designing New Installations

The following methods to reduce excessive irrigation runoff should be considered, and incorporated and implemented where determined applicable and feasible by the Permittee:

- Employ rain-triggered shutoff devices to prevent irrigation after precipitation.
- Design irrigation systems to each landscape area's specific water requirements.
- Include design featuring flow reducers or shutoff valves triggered by a pressure drop to control water loss in the event of broken sprinkler heads or lines.
- Implement landscape plans consistent with County or City water conservation resolutions, which may include provision of water sensors, programmable irrigation times (for short cycles), etc.



- Design timing and application methods of irrigation water to minimize the runoff of excess irrigation water into the storm water drainage system.
- Group plants with similar water requirements in order to reduce excess irrigation runoff and promote surface filtration. Choose plants with low irrigation requirements (for example, native or drought tolerant species). Consider design features such as:
 - Using mulches (such as wood chips or bar) in planter areas without ground cover to minimize sediment in runoff
 - Installing appropriate plant materials for the location, in accordance with amount of sunlight and climate, and use native plant materials where possible and/or as recommended by the landscape architect
 - Leaving a vegetative barrier along the property boundary and interior watercourses, to act as a pollutant filter, where appropriate and feasible
 - Choosing plants that minimize or eliminate the use of fertilizer or pesticides to sustain growth
- Employ other comparable, equally effective methods to reduce irrigation water runoff.

Redeveloping Existing Installations

Various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.) define “redevelopment” in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land disturbing activities with structural or impervious surfaces. The definition of “redevelopment” must be consulted to determine whether or not the requirements for new development apply to areas intended for redevelopment. If the definition applies, the steps outlined under “designing new installations” above should be followed.

Other Resources

A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.

Description

Trash storage areas are areas where a trash receptacle (s) are located for use as a repository for solid wastes. Stormwater runoff from areas where trash is stored or disposed of can be polluted. In addition, loose trash and debris can be easily transported by water or wind into nearby storm drain inlets, channels, and/or creeks. Waste handling operations that may be sources of stormwater pollution include dumpsters, litter control, and waste piles.

Approach

This fact sheet contains details on the specific measures required to prevent or reduce pollutants in stormwater runoff associated with trash storage and handling. Preventative measures including enclosures, containment structures, and impervious pavements to mitigate spills, should be used to reduce the likelihood of contamination.

Design Objectives

- Maximize Infiltration
- Provide Retention
- Slow Runoff
- Minimize Impervious Land Coverage
- Prohibit Dumping of Improper Materials
- ☒ Contain Pollutants
- Collect and Convey

Suitable Applications

Appropriate applications include residential, commercial and industrial areas planned for development or redevelopment. (Detached residential single-family homes are typically excluded from this requirement.)

Design Considerations

Design requirements for waste handling areas are governed by Building and Fire Codes, and by current local agency ordinances and zoning requirements. The design criteria described in this fact sheet are meant to enhance and be consistent with these code and ordinance requirements. Hazardous waste should be handled in accordance with legal requirements established in Title 22, California Code of Regulation.

Wastes from commercial and industrial sites are typically hauled by either public or commercial carriers that may have design or access requirements for waste storage areas. The design criteria in this fact sheet are recommendations and are not intended to be in conflict with requirements established by the waste hauler. The waste hauler should be contacted prior to the design of your site trash collection areas. Conflicts or issues should be discussed with the local agency.

Designing New Installations

Trash storage areas should be designed to consider the following structural or treatment control BMPs:

- Design trash container areas so that drainage from adjoining roofs and pavement is diverted around the area(s) to avoid run-on. This might include berming or grading the waste handling area to prevent run-on of stormwater.
- Make sure trash container areas are screened or walled to prevent off-site transport of trash.



- Use lined bins or dumpsters to reduce leaking of liquid waste.
- Provide roofs, awnings, or attached lids on all trash containers to minimize direct precipitation and prevent rainfall from entering containers.
- Pave trash storage areas with an impervious surface to mitigate spills.
- Do not locate storm drains in immediate vicinity of the trash storage area.
- Post signs on all dumpsters informing users that hazardous materials are not to be disposed of therein.

Redeveloping Existing Installations

Various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.) define “redevelopment” in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land disturbing activities with structural or impervious surfaces. The definition of “redevelopment” must be consulted to determine whether or not the requirements for new development apply to areas intended for redevelopment. If the definition applies, the steps outlined under “designing new installations” above should be followed.

Additional Information***Maintenance Considerations***

The integrity of structural elements that are subject to damage (i.e., screens, covers, and signs) must be maintained by the owner/operator. Maintenance agreements between the local agency and the owner/operator may be required. Some agencies will require maintenance deed restrictions to be recorded of the property title. If required by the local agency, maintenance agreements or deed restrictions must be executed by the owner/operator before improvement plans are approved.

Other Resources

A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.

EMPLOYEE SELF CERTIFICATION STATEMENT

As an employee of City of Perris for Patriot Park which a Water Quality Management Plan (WQMP) was approved by the City, I hereby certify under penalty of law that I have received the employee training information and am familiar with the proper use of Source Control and Treatment Control BMPs.

Signature: _____

Name: _____

Title: _____

Company: _____

Address: _____

Telephone Number: _____

Date: _____

Description

Improper storage and handling of solid wastes can allow toxic compounds, oils and greases, heavy metals, nutrients, suspended solids, and other pollutants to enter stormwater runoff. The discharge of pollutants to stormwater from waste handling and disposal can be prevented and reduced by tracking waste generation, storage, and disposal; reducing waste generation and disposal through source reduction, reuse, and recycling; and preventing run-on and runoff.

Approach

Reduce potential for pollutant discharge through source control pollution prevention and BMP implementation. Successful implementation depends on effective training of employees on applicable BMPs and general pollution prevention strategies and objectives.

General Pollution Prevention Protocols

- Accomplish reduction in the amount of waste generated using the following source controls:
 - ✓ Production planning and sequencing;
 - ✓ Process or equipment modification;
 - ✓ Raw material substitution or elimination;
 - ✓ Loss prevention and housekeeping;
 - ✓ Waste segregation and separation; and
 - ✓ Close loop recycling.
- Establish a material tracking system to increase awareness about material usage. This may reduce spills and minimize contamination, thus reducing the amount of waste produced.
- Recycle materials whenever possible.

Objectives

- Cover
- Contain
- Educate
- Reduce/Minimize
- Product Substitution

Targeted Constituents

Sediment

Nutrients

Trash

Metals

✓

Bacteria

✓

Oil and Grease

✓

Organics

✓

Minimum BMPs Covered



Good Housekeeping

✓



Preventative Maintenance

✓



Spill and Leak Prevention and Response

✓



Material Handling & Waste Management

✓



Erosion and Sediment Controls



Employee Training Program

✓



Quality Assurance Record Keeping

✓



- ❑ Use the entire product before disposing of the container.
- ❑ To the extent possible, store wastes under cover or indoors after ensuring all safety concerns such as fire hazard and ventilation are addressed.
- ❑ Provide containers for each waste stream at each work station. Allow time after shift to clean area.



Good Housekeeping

- ❑ Cover storage containers with leak proof lids or some other means. If waste is not in containers, cover all waste piles (plastic tarps are acceptable coverage) and prevent stormwater run-on and runoff with a berm. The waste containers or piles must be covered except when in use.
- ❑ Use drip pans or absorbent materials whenever grease containers are emptied by vacuum trucks or other means. Grease cannot be left on the ground. Collected grease must be properly disposed of as garbage.
- ❑ Dispose of rinse and wash water from cleaning waste containers into a sanitary sewer if allowed by the local sewer authority. Do not discharge wash water to the street or storm drain. Clean in a designated wash area that drains to a clarifier.
- ❑ Transfer waste from damaged containers into safe containers.
- ❑ Take special care when loading or unloading wastes to minimize losses. Loading systems can be used to minimize spills and fugitive emission losses such as dust or mist. Vacuum transfer systems can minimize waste loss.
- ❑ Keep the waste management area clean at all times by sweeping and cleaning up spills immediately.
- ❑ Use dry methods when possible (e.g., sweeping, use of absorbents) when cleaning around restaurant/food handling dumpster areas. If water must be used after sweeping/using absorbents, collect water and discharge through grease interceptor to the sewer.
- ❑ Stencil or demarcate storm drains on the facility's property with prohibitive message regarding waste disposal.
- ❑ Cover waste piles with temporary covering material such as reinforced tarpaulin, polyethylene, polyurethane, polypropylene or hypalon.
- ❑ If possible, move the activity indoor after ensuring all safety concerns such as fire hazard and ventilation are addressed.



Preventative Maintenance

- ❑ Prevent stormwater run-on from entering the waste management area by enclosing the area or building a berm around the area.
- ❑ Prevent waste materials from directly contacting rain.

- ☐ Cover waste piles with temporary covering material such as reinforced tarpaulin, polyethylene, polyurethane, polypropylene or hypalon.
- ☐ Cover the area with a permanent roof if feasible.
- ☐ Cover dumpsters to prevent rain from washing waste out of holes or cracks in the bottom of the dumpster.
- ☐ Check waste containers weekly for leaks and to ensure that lids are on tightly. Replace any that are leaking, corroded, or otherwise deteriorating.
- ☐ Sweep and clean the waste management area regularly. Use dry methods when possible (e.g., sweeping, vacuuming, use of absorbents) when cleaning around restaurant/food handling dumpster areas. If water must be used after sweeping/using absorbents, collect water and discharge through grease interceptor to the sewer.
- ☐ Inspect and replace faulty pumps or hoses regularly to minimize the potential of releases and spills.
- ☐ Repair leaking equipment including valves, lines, seals, or pumps promptly.



Spill Response and Prevention Procedures

- ☐ Keep your spill prevention and plan up-to-date.
- ☐ Have an emergency plan, equipment and trained personnel ready at all times to deal immediately with major spills.
- ☐ Collect all spilled liquids and properly dispose of them.
- ☐ Store and maintain appropriate spill cleanup materials in a location known to all near the designated wash area.
- ☐ Ensure that vehicles transporting waste have spill prevention equipment that can prevent spills during transport. Spill prevention equipment includes:
 - ✓ Vehicles equipped with baffles for liquid waste; and
 - ✓ Trucks with sealed gates and spill guards for solid waste.



Material Handling and Waste Management

Litter Control

- ☐ Post “No Littering” signs and enforce anti-litter laws.
- ☐ Provide a sufficient number of litter receptacles for the facility.
- ☐ Clean out and cover litter receptacles frequently to prevent spillage.

Waste Collection

- ☐ Keep waste collection areas clean.

- ☐ Inspect solid waste containers for structural damage regularly. Repair or replace damaged containers as necessary.
- ☐ Secure solid waste containers; containers must be closed tightly when not in use.
- ☐ Do not fill waste containers with washout water or any other liquid.
- ☐ Ensure that only appropriate solid wastes are added to the solid waste container. Certain wastes such as hazardous wastes, appliances, fluorescent lamps, pesticides, etc., may not be disposed of in solid waste containers (see chemical/ hazardous waste collection section below).
- ☐ Do not mix wastes; this can cause chemical reactions, make recycling impossible, and complicate disposal. Affix labels to all waste containers.

Chemical/Hazardous Wastes

- ☐ Select designated hazardous waste collection areas on-site.
- ☐ Store hazardous materials and wastes in covered containers and protect them from vandalism.
- ☐ Place hazardous waste containers in secondary containment.
- ☐ Make sure that hazardous waste is collected, removed, and disposed of only at authorized disposal areas.
- ☐ Hazardous waste cannot be reused or recycled; it must be disposed of by a licensed hazardous waste hauler.



Employee Training Program

- ☐ Educate employees about pollution prevention measures and goals.
- ☐ Train employees how to properly handle and dispose of waste using the source control BMPs described above.
- ☐ Train employees and subcontractors in proper hazardous waste management.
- ☐ Use a training log or similar method to document training.
- ☐ Ensure that employees are familiar with the site's spill control plan and/or proper spill cleanup procedures.



Quality Assurance and Record Keeping

- ☐ Keep accurate maintenance logs that document minimum BMP activities performed for waste handling and disposal, types and quantities of waste disposed of, and any improvement actions.
- ☐ Keep accurate logs of spill response actions that document what was spilled, how it was cleaned up, and how the waste was disposed.

- Establish procedures to complete logs and file them in the central office.

Potential Capital Facility Costs and Operation & Maintenance Requirements

Facilities

- Capital costs will vary substantially depending on the size of the facility and the types of waste handled. Significant capital costs may be associated with reducing wastes by modifying processes or implementing closed-loop recycling.
- Many facilities will already have indoor covered areas where waste materials will be stored and will require no additional capital expenditures for providing cover.
- If outdoor storage of wastes is required, construction of berms or other means to prevent stormwater run-on and runoff may require appropriate constructed systems for containment.
- Capital investments will likely be required at some sites if adequate cover and containment facilities do not exist and can vary significantly depending upon site conditions.

Maintenance

- Check waste containers weekly for leaks and to ensure that lids are on tightly. Replace any that are leaking, corroded, or otherwise deteriorating.
- Sweep and clean the waste management area regularly. Use dry methods when possible (e.g., sweeping, use of absorbents) when cleaning around restaurant/food handling dumpster areas. If water must be used after sweeping/using absorbents, collect water and discharge through grease interceptor to the sewer.
- Inspect and replace faulty pumps or hoses regularly to minimize the potential of releases and spills.
- Repair leaking equipment including valves, lines, seals, or pumps promptly.

References and Resources

Minnesota Pollution Control Agency, *Industrial Stormwater Best Management Practices Guidebook*. Available online at: <http://www.pca.state.mn.us/index.php/view-document.html?gid=10557>.

New Jersey Department of Environmental Protection, 2013. *Basic Industrial Stormwater General Permit Guidance Document NJPDES General Permit No NJ0088315*, Revised. Available online at: http://www.nj.gov/dep/dwq/pdf/5G2_guidance_color.pdf.

Orange County Stormwater Program, Best Management Practices for Industrial/Commercial Business Activities. Available online at: <http://ocwatersheds.com/documents/bmp/industrialcommercialbusinessesactivities>

Oregon Department of Environmental Quality, 2013. *Industrial Stormwater Best Management Practices Manual- BMP 26 Fueling and Liquid Loading/Unloading Operations*. Available online at:
<http://www.deq.state.or.us/wq/wqpermit/docs/IndBMP021413.pdf>.

Sacramento Stormwater Management Program. *Best Management Practices for Industrial Storm Water Pollution Control*. Available online at:
<http://www.msa.saccounty.net/sactostormwater/documents/guides/industrial-BMP-manual.pdf>.

Sacramento County Environmental Management Stormwater Program: Best Management Practices. Available online at:
<http://www.emd.saccounty.net/EnvHealth/Stormwater/Stormwater-BMPs.html>.

Santa Clara Valley Urban Runoff Pollution Prevention Program. <http://www.scvurppp-w2k.com/>

US EPA. National Pollutant Discharge Elimination System – Industrial Fact Sheet Series for Activities Covered by EPA’s Multi Sector General Permit. Available online at:
<http://cfpub.epa.gov/npdes/stormwater/swsectors.cfm>.

Description

Parking lots can contribute a number of substances, such as trash, suspended solids, hydrocarbons, oil and grease, and heavy metals that can enter receiving waters through stormwater runoff or non-stormwater discharges. The protocols in this fact sheet are intended to prevent or reduce the discharge of pollutants from parking areas and include using good housekeeping practices, following appropriate cleaning BMPs, and training employees.

BMPs for other outdoor areas on site (loading/unloading, material storage, and equipment operations) are described in SC-30 through SC-33.

Approach

The goal of this program is to ensure stormwater pollution prevention practices are considered when conducting activities on or around parking areas to reduce potential for pollutant discharge to receiving waters. Successful implementation depends on effective training of employees on applicable BMPs and general pollution prevention strategies and objectives.

General Pollution Prevention Protocols

- ❑ Encourage advanced designs and maintenance strategies for impervious parking lots. Refer to the treatment control BMP fact sheets in this manual for additional information.
- ❑ Keep accurate maintenance logs to evaluate BMP implementation.



Good Housekeeping

- ❑ Keep all parking areas clean and orderly. Remove debris, litter, and sediments in a timely fashion.
- ❑ Post “No Littering” signs and enforce anti-litter laws.

Objectives

- Cover
- Contain
- Educate
- Reduce/Minimize
- Product Substitution

Targeted Constituents

<i>Sediment</i>	✓
<i>Nutrients</i>	
<i>Trash</i>	✓
<i>Metals</i>	✓
<i>Bacteria</i>	
<i>Oil and Grease</i>	✓
<i>Organics</i>	✓

Minimum BMPs Covered

	<i>Good Housekeeping</i>	✓
	<i>Preventative Maintenance</i>	✓
	<i>Spill and Leak Prevention and Response</i>	✓
	<i>Material Handling & Waste Management</i>	
	<i>Erosion and Sediment Controls</i>	
	<i>Employee Training Program</i>	✓
	<i>Quality Assurance Record Keeping</i>	✓



- ☐ Provide an adequate number of litter receptacles.
- ☐ Clean out and cover litter receptacles frequently to prevent spillage.



Preventative Maintenance

Inspection

Have designated personnel conduct inspections of parking facilities and stormwater conveyance systems associated with parking facilities on a regular basis.

- ☐ Inspect cleaning equipment/sweepers for leaks on a regular basis.

Surface Cleaning

- ☐ Use dry cleaning methods (e.g., sweeping, vacuuming) to prevent the discharge of pollutants into the stormwater conveyance system if possible.
- ☐ Establish frequency of public parking lot sweeping based on usage and field observations of waste accumulation.
- ☐ Sweep all parking lots at least once before the onset of the wet season.
- ☐ Dispose of parking lot sweeping debris and dirt at a landfill.
- ☐ Follow the procedures below if water is used to clean surfaces:
 - ✓ Block the storm drain or contain runoff.
 - ✓ Collect and pump wash water to the sanitary sewer or discharge to a pervious surface. Do not allow wash water to enter storm drains.
- ☐ Follow the procedures below when cleaning heavy oily deposits:
 - ✓ Clean oily spots with absorbent materials.
 - ✓ Use a screen or filter fabric over inlet, then wash surfaces.
 - ✓ Do not allow discharges to the storm drain.
 - ✓ Vacuum/pump discharges to a tank or discharge to sanitary sewer.
 - ✓ Dispose of spilled materials and absorbents appropriately.

Surface Repair

- ☐ Check local ordinance for SUSMP/LID ordinance.
- ☐ Preheat, transfer or load hot bituminous material away from storm drain inlets.
- ☐ Apply concrete, asphalt, and seal coat during dry weather to prevent contamination from contacting stormwater runoff.
- ☐ Cover and seal nearby storm drain inlets where applicable (with waterproof material or mesh) and manholes before applying seal coat, slurry seal, etc. Leave covers in

place until job is complete and all water from emulsified oil sealants has drained or evaporated. Clean any debris from these covered manholes and drains for proper disposal.

- ☐ Use only as much water as necessary for dust control during sweeping to avoid runoff.
- ☐ Catch drips from paving equipment that is not in use with pans or absorbent material placed under the machines. Dispose of collected material and absorbents properly.



Spill Response and Prevention Procedures

- ☐ Keep your Spill Prevention Control and Countermeasure (SPCC) Plan up-to-date.
- ☐ Place a stockpile of spill cleanup materials where it will be readily accessible or at a central location.
- ☐ Clean up fluid spills immediately with absorbent rags or material.
- ☐ Dispose of spilled material and absorbents properly.



Employee Training Program

- ☐ Provide regular training to field employees and/or contractors regarding cleaning of paved areas and proper operation of equipment.
- ☐ Train employees and contractors in proper techniques for spill containment and cleanup.
- ☐ Use a training log or similar method to document training.



Quality Assurance and Record Keeping

- ☐ Keep accurate maintenance logs that document minimum BMP activities performed for parking area maintenance, types and quantities of waste disposed of, and any improvement actions.
- ☐ Keep accurate logs of spill response actions that document what was spilled, how it was cleaned up, and how the waste was disposed.
- ☐ Establish procedures to complete logs and file them in the central office.

Potential Capital Facility Costs and Operation & Maintenance Requirements

Facilities

- ☐ Capital investments may be required at some sites to purchase sweeping equipment, train sweeper operators, install oil/water/sand separators, or implement advanced BMPs. These costs can vary significantly depending upon site conditions and the amount of BMPs required.

Maintenance

- ❑ Sweep and clean parking lots regularly to minimize pollutant transport into storm drains from stormwater runoff.
- ❑ Clean out oil/water/sand separators regularly, especially after heavy storms.
- ❑ Maintain advanced BMPs such as vegetated swales, infiltration trenches, or detention basins as appropriate. Refer to the treatment control fact sheets for more information.

Supplemental Information

Advanced BMPs

Some parking areas may require advanced BMPs to further reduce pollutants in stormwater runoff, and a few examples are listed below. Refer to the Treatment Control Fact Sheets and the New Development and Redevelopment Manual for more information.

- ❑ When possible, direct sheet runoff to flow into biofilters (vegetated strip and swale) and/or infiltration devices.
- ❑ Utilize sand filters or oleophilic collectors for oily waste in low quantities.
- ❑ Arrange rooftop drains to prevent drainage directly onto paved surfaces.
- ❑ Design lot to include semi-permeable hardscape.

References and Resources

City of Seattle, Seattle Public Utilities Department of Planning and Development, 2009. *Stormwater Manual Vol. 1 Source Control Technical Requirements Manual*.

California Stormwater Quality Association, 2003. *New Development and Redevelopment Stormwater Best Management Practice Handbook*. Available online at: <https://www.casqa.org/resources/bmp-handbooks/new-development-redevelopment-bmp-handbook>.

Kennedy/Jenks Consultants, 2007. *The Truckee Meadows Industrial and Commercial Storm Water Best Management Practices Handbook*. Available online at: [http://www.cityofsparks.us/sites/default/files/assets/documents/env-control/construction/TM-I-C BMP Handbook 2-07-final.pdf](http://www.cityofsparks.us/sites/default/files/assets/documents/env-control/construction/TM-I-C_BMP_Handbook_2-07-final.pdf).

Orange County Stormwater Program, Best Management Practices for Industrial/Commercial Business Activities. Available online at: <http://ocwatersheds.com/documents/bmp/industrialcommercialbusinessesactivities>.

Pollution from Surface Cleaning Folder, 1996, 2003. Bay Area Stormwater Management Agencies Association. Available online at:

<http://basmaa.org/Portals/o/documents/pdf/Pollution%20from%20Surface%20Cleaning.pdf>.

Sacramento Stormwater Management Program. *Best Management Practices for Industrial Storm Water Pollution Control*. Available online at:

<http://www.msa.saccounty.net/sactostormwater/documents/guides/industrial-BMP-manual.pdf>.

The Storm Water Managers Resource Center, <http://www.stormwatercenter.net>.

US EPA. *Post-Construction Stormwater Management in New Development and Redevelopment*. BMP Fact Sheets. Available online at:

http://cfpub.epa.gov/npdes/stormwater/menuofbmps/index.cfm?action=min_measure&min_measure_id=5.



Description

Pollutants on sidewalks and other pedestrian traffic areas and plazas are typically due to littering and vehicle use. This fact sheet describes good housekeeping practices that can be incorporated into the municipality's existing cleaning and maintenance program.

Approach

Pollution Prevention

- Use dry cleaning methods whenever practical for surface cleaning activities.
- Use the least toxic materials available (e.g. water based paints, gels or sprays for graffiti removal).

Suggested Protocols

Surface Cleaning

- Regularly broom (dry) sweep sidewalk, plaza and parking lot areas to minimize cleaning with water.
- Dry cleanup first (sweep, collect, and dispose of debris and trash) when cleaning sidewalks or plazas, then wash with or without soap.
- Block the storm drain or contain runoff when cleaning with water. Discharge wash water to landscaping or collect water and pump to a tank or discharge to sanitary sewer if allowed. (Permission may be required from local sanitation district.)

Objectives

- Cover
- Contain
- Educate
- Reduce/Minimize
- Product Substitution

Targeted Constituents

Sediment	☒
Nutrients	☒
Trash	☒
Metals	☒
Bacteria	☒
Oil and Grease	☒
Organics	☒
Oxygen Demanding	☒



- Block the storm drain or contain runoff when washing parking areas, driveways or drive-throughs. Use absorbents to pick up oil; then dry sweep. Clean with or without soap. Collect water and pump to a tank or discharge to sanitary sewer if allowed. Street Repair and Maintenance.

Graffiti Removal

- Avoid graffiti abatement activities during rain events.
- Implement the procedures under Painting and Paint Removal in SC-70 Roads, Streets, and Highway Operation and Maintenance fact sheet when graffiti is removed by painting over.
- Direct runoff from sand blasting and high pressure washing (with no cleaning agents) into a dirt or landscaped area after treating with an appropriate filtering device.
- Plug nearby storm drain inlets and vacuum/pump wash water to the sanitary sewer if authorized to do so if a graffiti abatement method generates wash water containing a cleaning compound (such as high pressure washing with a cleaning compound). Ensure that a non-hazardous cleaning compound is used or dispose as hazardous waste, as appropriate.

Surface Removal and Repair

- Schedule surface removal activities for dry weather if possible.
- Avoid creating excess dust when breaking asphalt or concrete.
- Take measures to protect nearby storm drain inlets prior to breaking up asphalt or concrete (e.g. place hay bales or sand bags around inlets). Clean afterwards by sweeping up as much material as possible.
- Designate an area for clean up and proper disposal of excess materials.
- Remove and recycle as much of the broken pavement as possible to avoid contact with rainfall and stormwater runoff.
- When making saw cuts in pavement, use as little water as possible. Cover each storm drain inlet completely with filter fabric during the sawing operation and contain the slurry by placing straw bales, sandbags, or gravel dams around the inlets. After the liquid drains or evaporates, shovel or vacuum the slurry residue from the pavement or gutter and remove from site.
- Always dry sweep first to clean up tracked dirt. Use a street sweeper or vacuum truck. Do not dump vacuumed liquid in storm drains. Once dry sweeping is complete, the area may be hosed down if needed. Wash water should be directed to landscaping or collected and pumped to the sanitary sewer if allowed.

Concrete Installation and Repair

- Schedule asphalt and concrete activities for dry weather.

- Take measures to protect any nearby storm drain inlets and adjacent watercourses, prior to breaking up asphalt or concrete (e.g. place sand bags around inlets or work areas).
- Limit the amount of fresh concrete or cement mortar mixed, mix only what is needed for the job.
- Store concrete materials under cover, away from drainage areas. Secure bags of cement after they are open. Be sure to keep wind-blown cement powder away from streets, gutters, storm drains, rainfall, and runoff.
- Return leftover materials to the transit mixer. Dispose of small amounts of hardened excess concrete, grout, and mortar in the trash.
- Do not wash sweepings from exposed aggregate concrete into the street or storm drain. Collect and return sweepings to aggregate base stockpile, or dispose in the trash.
- Protect applications of fresh concrete from rainfall and runoff until the material has dried.
- Do not allow excess concrete to be dumped onsite, except in designated areas.
- Wash concrete trucks off site or in designated areas on site designed to preclude discharge of wash water to drainage system.

Controlling Litter

- Post “No Littering” signs and enforce anti-litter laws.
- Provide litter receptacles in busy, high pedestrian traffic areas of the community, at recreational facilities, and at community events.
- Cover litter receptacles and clean out frequently to prevent leaking/spillage or overflow.
- Clean parking lots on a regular basis with a street sweeper.

Training

- Provide regular training to field employees and/or contractors regarding surface cleaning and proper operation of equipment.
- Train employee and contractors in proper techniques for spill containment and cleanup.
- Use a training log or similar method to document training.

Spill Response and Prevention

- Refer to SC-11, Spill Prevention, Control & Cleanup.
- Have spill cleanup materials readily available and in a known location.
- Cleanup spills immediately and use dry methods if possible.
- Properly dispose of spill cleanup material.

Other Considerations

- Limitations related to sweeping activities at large parking facilities may include current sweeper technology to remove oil and grease.
- Surface cleaning activities that require discharges to the local sewerage agency will require coordination with the agency.
- Arrangements for disposal of the swept material collected must be made, as well as accurate tracking of the areas swept and the frequency of sweeping.

Requirements***Costs***

- The largest expenditures for sweeping and cleaning of sidewalks, plazas, and parking lots are in staffing and equipment. Sweeping of these areas should be incorporated into street sweeping programs to reduce costs.

Maintenance

Not applicable

Supplemental Information***Further Detail of the BMP***

Community education, such as informing residents about their options for recycling and waste disposal, as well as the consequences of littering, can instill a sense of citizen responsibility and potentially reduce the amount of maintenance required by the municipality.

Additional BMPs that should be considered for parking lot areas include:

- Allow sheet runoff to flow into biofilters (vegetated strip and swale) and infiltration devices.
- Utilize sand filters or oleophilic collectors for oily waste in low concentrations.
- Arrange rooftop drains to prevent drainage directly onto paved surfaces.
- Design lot to include semi-permeable hardscape.
- Structural BMPs such as storm drain inlet filters can be very effective in reducing the amount of pollutants discharged from parking facilities during periods of rain.

References and Resources

Bay Area Stormwater Management Agencies Association (BASMAA). 1996. Pollution From Surface Cleaning Folder <http://www.basmaa.org>

Model Urban Runoff Program: A How-To Guide for Developing Urban Runoff Programs for Small Municipalities. Prepared by City of Monterey, City of Santa Cruz, California Coastal Commission, Monterey Bay National Marine Sanctuary, Association of Monterey Bay Area Governments, Woodward-Clyde, Central Coast Regional Water Quality Control Board. July. 1998.

Oregon Association of Clean Water Agencies. Oregon Municipal Stormwater Toolbox for Maintenance Practices. June 1998.

Orange County Stormwater Program

http://www.ocwatersheds.com/stormwater/swp_introduction.asp

Santa Clara Valley Urban Runoff Pollution Prevention Program. 1997 Urban Runoff Management Plan. September 1997, updated October 2000.

Santa Clara Valley Urban Runoff Pollution Prevention Program. Maintenance Best Management Practices for the Construction Industry. Brochures: Landscaping, Gardening, and Pool; Roadwork and Paving; and Fresh Concrete and Mortar Application. June 2001.

San Diego Stormwater Co-permittees Jurisdictional Urban Runoff Management Plan. 2001. Municipal Activities Model Program Guidance. November.



Description

Landscape maintenance activities include vegetation removal; herbicide and insecticide application; fertilizer application; watering; and other gardening and lawn care practices. Vegetation control typically involves a combination of chemical (herbicide) application and mechanical methods. All of these maintenance practices have the potential to contribute pollutants to the storm drain system. The major objectives of this BMP are to minimize the discharge of pesticides, herbicides and fertilizers to the storm drain system and receiving waters; prevent the disposal of landscape waste into the storm drain system by collecting and properly disposing of clippings and cuttings, and educating employees and the public.

Approach

Pollution Prevention

- Implement an integrated pest management (IPM) program. IPM is a sustainable approach to managing pests by combining biological, cultural, physical, and chemical tools.
- Choose low water using flowers, trees, shrubs, and groundcover.
- Consider alternative landscaping techniques such as naturescaping and xeriscaping.
- Conduct appropriate maintenance (i.e. properly timed fertilizing, weeding, pest control, and pruning) to help preserve the landscapes water efficiency.

Objectives

- Contain
- Educate
- Reduce/Minimize
- Product Substitution

Targeted Constituents

Sediment	☒
Nutrients	☒
Trash	☒
Metals	
Bacteria	
Oil and Grease	
Organics	
Oxygen Demanding	☒



- Consider grass cycling (grass cycling is the natural recycling of grass by leaving the clippings on the lawn when mowing. Grass clippings decompose quickly and release valuable nutrients back into the lawn).

Suggested Protocols***Mowing, Trimming, and Weeding***

- Whenever possible use mechanical methods of vegetation removal (e.g mowing with tractor-type or push mowers, hand cutting with gas or electric powered weed trimmers) rather than applying herbicides. Use hand weeding where practical.
- Avoid loosening the soil when conducting mechanical or manual weed control, this could lead to erosion. Use mulch or other erosion control measures when soils are exposed.
- Performing mowing at optimal times. Mowing should not be performed if significant rain events are predicted.
- Mulching mowers may be recommended for certain flat areas. Other techniques may be employed to minimize mowing such as selective vegetative planting using low maintenance grasses and shrubs.
- Collect lawn and garden clippings, pruning waste, tree trimmings, and weeds. Chip if necessary, and compost or dispose of at a landfill (see waste management section of this fact sheet).
- Place temporarily stockpiled material away from watercourses, and berm or cover stockpiles to prevent material releases to storm drains.

Planting

- Determine existing native vegetation features (location, species, size, function, importance) and consider the feasibility of protecting them. Consider elements such as their effect on drainage and erosion, hardiness, maintenance requirements, and possible conflicts between preserving vegetation and the resulting maintenance needs.
- Retain and/or plant selected native vegetation whose features are determined to be beneficial, where feasible. Native vegetation usually requires less maintenance (e.g., irrigation, fertilizer) than planting new vegetation.
- Consider using low water use groundcovers when planting or replanting.

Waste Management

- Compost leaves, sticks, or other collected vegetation or dispose of at a permitted landfill. Do not dispose of collected vegetation into waterways or storm drainage systems.
- Place temporarily stockpiled material away from watercourses and storm drain inlets, and berm or cover stockpiles to prevent material releases to the storm drain system.
- Reduce the use of high nitrogen fertilizers that produce excess growth requiring more frequent mowing or trimming.

- Avoid landscape wastes in and around storm drain inlets by either using bagging equipment or by manually picking up the material.

Irrigation

- Where practical, use automatic timers to minimize runoff.
- Use popup sprinkler heads in areas with a lot of activity or where there is a chance the pipes may be broken. Consider the use of mechanisms that reduce water flow to sprinkler heads if broken.
- Ensure that there is no runoff from the landscaped area(s) if re-claimed water is used for irrigation.
- If bailing of muddy water is required (e.g. when repairing a water line leak), do not put it in the storm drain; pour over landscaped areas.
- Irrigate slowly or pulse irrigate to prevent runoff and then only irrigate as much as is needed.
- Apply water at rates that do not exceed the infiltration rate of the soil.

Fertilizer and Pesticide Management

- Utilize a comprehensive management system that incorporates integrated pest management (IPM) techniques. There are many methods and types of IPM, including the following:
 - Mulching can be used to prevent weeds where turf is absent, fencing installed to keep rodents out, and netting used to keep birds and insects away from leaves and fruit.
 - Visible insects can be removed by hand (with gloves or tweezers) and placed in soapy water or vegetable oil. Alternatively, insects can be sprayed off the plant with water or in some cases vacuumed off of larger plants.
 - Store-bought traps, such as species-specific, pheromone-based traps or colored sticky cards, can be used.
 - Slugs can be trapped in small cups filled with beer that are set in the ground so the slugs can get in easily.
 - In cases where microscopic parasites, such as bacteria and fungi, are causing damage to plants, the affected plant material can be removed and disposed of (pruning equipment should be disinfected with bleach to prevent spreading the disease organism).
 - Small mammals and birds can be excluded using fences, netting, tree trunk guards.
 - Beneficial organisms, such as bats, birds, green lacewings, ladybugs, praying mantis, ground beetles, parasitic nematodes, trichogramma wasps, seed head weevils, and spiders that prey on detrimental pest species can be promoted.
- Follow all federal, state, and local laws and regulations governing the use, storage, and disposal of fertilizers and pesticides and training of applicators and pest control advisors.

- Use pesticides only if there is an actual pest problem (not on a regular preventative schedule).
- Do not use pesticides if rain is expected. Apply pesticides only when wind speeds are low (less than 5 mph).
- Do not mix or prepare pesticides for application near storm drains.
- Prepare the minimum amount of pesticide needed for the job and use the lowest rate that will effectively control the pest.
- Employ techniques to minimize off-target application (e.g. spray drift) of pesticides, including consideration of alternative application techniques.
- Fertilizers should be worked into the soil rather than dumped or broadcast onto the surface.
- Calibrate fertilizer and pesticide application equipment to avoid excessive application.
- Periodically test soils for determining proper fertilizer use.
- Sweep pavement and sidewalk if fertilizer is spilled on these surfaces before applying irrigation water.
- Purchase only the amount of pesticide that you can reasonably use in a given time period (month or year depending on the product).
- Triple rinse containers, and use rinse water as product. Dispose of unused pesticide as hazardous waste.
- Dispose of empty pesticide containers according to the instructions on the container label.

Inspection

- Inspect irrigation system periodically to ensure that the right amount of water is being applied and that excessive runoff is not occurring. Minimize excess watering, and repair leaks in the irrigation system as soon as they are observed.
- Inspect pesticide/fertilizer equipment and transportation vehicles daily.

Training

- Educate and train employees on use of pesticides and in pesticide application techniques to prevent pollution. Pesticide application must be under the supervision of a California qualified pesticide applicator.
- Train/encourage municipal maintenance crews to use IPM techniques for managing public green areas.
- Annually train employees within departments responsible for pesticide application on the appropriate portions of the agency's IPM Policy, SOPs, and BMPs, and the latest IPM techniques.

- Employees who are not authorized and trained to apply pesticides should be periodically (at least annually) informed that they cannot use over-the-counter pesticides in or around the workplace.
- Use a training log or similar method to document training.

Spill Response and Prevention

- Refer to SC-11, Spill Prevention, Control & Cleanup
- Have spill cleanup materials readily available and in a known location
- Cleanup spills immediately and use dry methods if possible.
- Properly dispose of spill cleanup material.

Other Considerations

- The Federal Pesticide, Fungicide, and Rodenticide Act and California Title 3, Division 6, Pesticides and Pest Control Operations place strict controls over pesticide application and handling and specify training, annual refresher, and testing requirements. The regulations generally cover: a list of approved pesticides and selected uses, updated regularly; general application information; equipment use and maintenance procedures; and record keeping. The California Department of Pesticide Regulations and the County Agricultural Commission coordinate and maintain the licensing and certification programs. All public agency employees who apply pesticides and herbicides in “agricultural use” areas such as parks, golf courses, rights-of-way and recreation areas should be properly certified in accordance with state regulations. Contracts for landscape maintenance should include similar requirements.
- All employees who handle pesticides should be familiar with the most recent material safety data sheet (MSDS) files.
- Municipalities do not have the authority to regulate the use of pesticides by school districts, however the California Healthy Schools Act of 2000 (AB 2260) has imposed requirements on California school districts regarding pesticide use in schools. Posting of notification prior to the application of pesticides is now required, and IPM is stated as the preferred approach to pest management in schools.

Requirements

Costs

Additional training of municipal employees will be required to address IPM techniques and BMPs. IPM methods will likely increase labor cost for pest control which may be offset by lower chemical costs.

Maintenance

Not applicable

Supplemental Information***Further Detail of the BMP******Waste Management***

Composting is one of the better disposal alternatives if locally available. Most municipalities either have or are planning yard waste composting facilities as a means of reducing the amount of waste going to the landfill. Lawn clippings from municipal maintenance programs as well as private sources would probably be compatible with most composting facilities

Contractors and Other Pesticide Users

Municipal agencies should develop and implement a process to ensure that any contractor employed to conduct pest control and pesticide application on municipal property engages in pest control methods consistent with the IPM Policy adopted by the agency. Specifically, municipalities should require contractors to follow the agency's IPM policy, SOPs, and BMPs; provide evidence to the agency of having received training on current IPM techniques when feasible; provide documentation of pesticide use on agency property to the agency in a timely manner.

References and Resources

King County Stormwater Pollution Control Manual. Best Management Practices for Businesses. 1995. King County Surface Water Management. July. On-line:
<http://dnr.metrokc.gov/wlr/dss/spcm.htm>

Los Angeles County Stormwater Quality Model Programs. Public Agency Activities
http://ladpw.org/wmd/npdes/model_links.cfm

Model Urban Runoff Program: A How-To Guide for Developing Urban Runoff Programs for Small Municipalities. Prepared by City of Monterey, City of Santa Cruz, California Coastal Commission, Monterey Bay National Marine Sanctuary, Association of Monterey Bay Area Governments, Woodward-Clyde, Central Coast Regional Water Quality Control Board. July. 1998.

Orange County Stormwater Program
http://www.ocwatersheds.com/StormWater/swp_introduction.asp

Santa Clara Valley Urban Runoff Pollution Prevention Program. 1997 Urban Runoff Management Plan. September 1997, updated October 2000.

United States Environmental Protection Agency (USEPA). 2002. Pollution Prevention/Good Housekeeping for Municipal Operations Landscaping and Lawn Care. Office of Water. Office of Wastewater Management. On-line: http://www.epa.gov/npdes/menuofbmps/poll_8.htm



Photo Credit: Geoff Brosseau

Description

As a consequence of its function, the stormwater conveyance system collects and transports urban runoff that may contain certain pollutants. Maintaining catch basins, stormwater inlets, and other stormwater conveyance structures on a regular basis will remove pollutants, prevent clogging of the downstream conveyance system, restore catch basins' sediment trapping capacity, and ensure the system functions properly hydraulically to avoid flooding.

Approach

Suggested Protocols

Catch Basins/Inlet Structures

- Municipal staff should regularly inspect facilities to ensure the following:
 - Immediate repair of any deterioration threatening structural integrity.
 - Cleaning before the sump is 40% full. Catch basins should be cleaned as frequently as needed to meet this standard.
 - Stenciling of catch basins and inlets (see SC-75 Waste Handling and Disposal).
- Clean catch basins, storm drain inlets, and other conveyance structures in high pollutant load areas just before the wet season to remove sediments and debris accumulated during the summer.

Objectives

- Contain
- Educate
- Reduce/Minimize

Targeted Constituents

Sediment	☒
Nutrients	☒
Trash	☒
Metals	☒
Bacteria	☒
Oil and Grease	☒
Organics	☒
Oxygen Demanding	☒



SC-74 **Drainage System Maintenance**

- Conduct inspections more frequently during the wet season for problem areas where sediment or trash accumulates more often. Clean and repair as needed.
- Keep accurate logs of the number of catch basins cleaned.
- Record the amount of waste collected.
- Store wastes collected from cleaning activities of the drainage system in appropriate containers or temporary storage sites in a manner that prevents discharge to the storm drain.
- Dewater the wastes with outflow into the sanitary sewer if permitted. Water should be treated with an appropriate filtering device prior to discharge to the sanitary sewer. If discharge to the sanitary sewer is not allowed, water should be pumped or vacuumed to a tank and properly disposed of. Do not dewater near a storm drain or stream.
- Except for small communities with relatively few catch basins that may be cleaned manually, most municipalities will require mechanical cleaners such as eductors, vacuums, or bucket loaders.

Storm Drain Conveyance System

- Locate reaches of storm drain with deposit problems and develop a flushing schedule that keeps the pipe clear of excessive buildup.
- Collect flushed effluent and pump to the sanitary sewer for treatment.

Pump Stations

- Clean all storm drain pump stations prior to the wet season to remove silt and trash.
- Do not allow discharge from cleaning a storm drain pump station or other facility to reach the storm drain system.
- Conduct quarterly routine maintenance at each pump station.
- Inspect, clean, and repair as necessary all outlet structures prior to the wet season.
- Sample collected sediments to determine if landfill disposal is possible, or illegal discharges in the watershed are occurring.

Open Channel

- Consider modification of storm channel characteristics to improve channel hydraulics, to increase pollutant removals, and to enhance channel/creek aesthetic and habitat value.
- Conduct channel modification/improvement in accordance with existing laws. Any person, government agency, or public utility proposing an activity that will change the natural (emphasis added) state of any river, stream, or lake in California, must enter into a stream or Lake Alteration Agreement with the Department of Fish and Game. The developer-applicant should also contact local governments (city, county, special districts), other state agencies

(SWRCB, RWQCB, Department of Forestry, Department of Water Resources), and Federal Corps of Engineers and USFWS

Illicit Connections and Discharges

- During routine maintenance of conveyance system and drainage structures field staff should look for evidence of illegal discharges or illicit connections:
 - Is there evidence of spills such as paints, discoloring, etc.
 - Are there any odors associated with the drainage system
 - Record locations of apparent illegal discharges/illicit connections
 - Track flows back to potential dischargers and conduct aboveground inspections. This can be done through visual inspection of up gradient manholes or alternate techniques including zinc chloride smoke testing, fluorometric dye testing, physical inspection testing, or television camera inspection.
 - Once the origin of flow is established, require illicit discharger to eliminate the discharge.
- Stencil storm drains, where applicable, to prevent illegal disposal of pollutants. Storm drain inlets should have messages such as “Dump No Waste Drains to Stream” stenciled next to them to warn against ignorant or intentional dumping of pollutants into the storm drainage system.
- Refer to fact sheet SC-10 Non-Stormwater Discharges.

Illegal Dumping

- Regularly inspect and clean up hot spots and other storm drainage areas where illegal dumping and disposal occurs.
- Establish a system for tracking incidents. The system should be designed to identify the following:
 - Illegal dumping hot spots
 - Types and quantities (in some cases) of wastes
 - Patterns in time of occurrence (time of day/night, month, or year)
 - Mode of dumping (abandoned containers, “midnight dumping” from moving vehicles, direct dumping of materials, accidents/spills)
 - Responsible parties
- Post “No Dumping” signs in problem areas with a phone number for reporting dumping and disposal. Signs should also indicate fines and penalties for illegal dumping.
- Refer to fact sheet SC-10 Non-Stormwater Discharges.

SC-74 Drainage System Maintenance

- The State Department of Fish and Game has a hotline for reporting violations called Cal TIP (1-800-952-5400). The phone number may be used to report any violation of a Fish and Game code (illegal dumping, poaching, etc.).
- The California Department of Toxic Substances Control's Waste Alert Hotline, 1-800-69TOXIC, can be used to report hazardous waste violations.

Training

- Train crews in proper maintenance activities, including record keeping and disposal.
- Only properly trained individuals are allowed to handle hazardous materials/wastes.
- Train municipal employees from all departments (public works, utilities, street cleaning, parks and recreation, industrial waste inspection, hazardous waste inspection, sewer maintenance) to recognize and report illegal dumping.
- Train municipal employees and educate businesses, contractors, and the general public in proper and consistent methods for disposal.
- Train municipal staff regarding non-stormwater discharges (See SC-10 Non-Stormwater Discharges).

Spill Response and Prevention

- Refer to SC-11, Prevention, Control & Cleanup
- Have spill cleanup materials readily available and in a known location.
- Cleanup spills immediately and use dry methods if possible.
- Properly dispose of spill cleanup material.

Other Considerations

- Cleanup activities may create a slight disturbance for local aquatic species. Access to items and material on private property may be limited. Trade-offs may exist between channel hydraulics and water quality/riparian habitat. If storm channels or basins are recognized as wetlands, many activities, including maintenance, may be subject to regulation and permitting.
- Storm drain flushing is most effective in small diameter pipes (36-inch diameter pipe or less, depending on water supply and sediment collection capacity). Other considerations associated with storm drain flushing may include the availability of a water source, finding a downstream area to collect sediments, liquid/sediment disposal, and disposal of flushed effluent to sanitary sewer may be prohibited in some areas.
- Regulations may include adoption of substantial penalties for illegal dumping and disposal.
- Municipal codes should include sections prohibiting the discharge of soil, debris, refuse, hazardous wastes, and other pollutants into the storm drain system.
- Private property access rights may be needed to track illegal discharges up gradient.

- Requirements of municipal ordinance authority for suspected source verification testing for illicit connections necessary for guaranteed rights of entry.

Requirements

Costs

- An aggressive catch basin cleaning program could require a significant capital and O&M budget. A careful study of cleaning effectiveness should be undertaken before increased cleaning is implemented. Catch basin cleaning costs are less expensive if vacuum street sweepers are available; cleaning catch basins manually can cost approximately twice as much as cleaning the basins with a vacuum attached to a sweeper.
- Methods used for illicit connection detection (smoke testing, dye testing, visual inspection, and flow monitoring) can be costly and time-consuming. Site-specific factors, such as the level of impervious area, the density and ages of buildings, and type of land use will determine the level of investigation necessary. Encouraging reporting of illicit discharges by employees can offset costs by saving expense on inspectors and directing resources more efficiently. Some programs have used funds available from “environmental fees” or special assessment districts to fund their illicit connection elimination programs.

Maintenance

- Two-person teams may be required to clean catch basins with vactor trucks.
- Identifying illicit discharges requires teams of at least two people (volunteers can be used), plus administrative personnel, depending on the complexity of the storm sewer system.
- Arrangements must be made for proper disposal of collected wastes.
- Requires technical staff to detect and investigate illegal dumping violations, and to coordinate public education.

Supplemental Information

Further Detail of the BMP

Storm Drain flushing

Sanitary sewer flushing is a common maintenance activity used to improve pipe hydraulics and to remove pollutants in sanitary sewer systems. The same principles that make sanitary sewer flushing effective can be used to flush storm drains. Flushing may be designed to hydraulically convey accumulated material to strategic locations, such as to an open channel, to another point where flushing will be initiated, or over to the sanitary sewer and on to the treatment facilities, thus preventing re-suspension and overflow of a portion of the solids during storm events. Flushing prevents “plug flow” discharges of concentrated pollutant loadings and sediments. The deposits can hinder the designed conveyance capacity of the storm drain system and potentially cause backwater conditions in severe cases of clogging.

Storm drain flushing usually takes place along segments of pipe with grades that are too flat to maintain adequate velocity to keep particles in suspension. An upstream manhole is selected to place an inflatable device that temporarily plugs the pipe. Further upstream, water is pumped into the line to create a flushing wave. When the upstream reach of pipe is sufficiently full to

SC-74 Drainage System Maintenance

cause a flushing wave, the inflated device is rapidly deflated with the assistance of a vacuum pump, releasing the backed up water and resulting in the cleaning of the storm drain segment.

To further reduce the impacts of stormwater pollution, a second inflatable device, placed well downstream, may be used to re-collect the water after the force of the flushing wave has dissipated. A pump may then be used to transfer the water and accumulated material to the sanitary sewer for treatment. In some cases, an interceptor structure may be more practical or required to re-collect the flushed waters.

It has been found that cleansing efficiency of periodic flush waves is dependent upon flush volume, flush discharge rate, sewer slope, sewer length, sewer flow rate, sewer diameter, and population density. As a rule of thumb, the length of line to be flushed should not exceed 700 feet. At this maximum recommended length, the percent removal efficiency ranges between 65-75 percent for organics and 55-65 percent for dry weather grit/inorganic material. The percent removal efficiency drops rapidly beyond that. Water is commonly supplied by a water truck, but fire hydrants can also supply water. To make the best use of water, it is recommended that reclaimed water be used or that fire hydrant line flushing coincide with storm drain flushing.

Flow Management

Flow management has been one of the principal motivations for designing urban stream corridors in the past. Such needs may or may not be compatible with the stormwater quality goals in the stream corridor.

Downstream flood peaks can be suppressed by reducing through flow velocity. This can be accomplished by reducing gradient with grade control structures or increasing roughness with boulders, dense vegetation, or complex banks forms. Reducing velocity correspondingly increases flood height, so all such measures have a natural association with floodplain open space. Flood elevations laterally adjacent to the stream can be lowered by increasing through flow velocity.

However, increasing velocity increases flooding downstream and inherently conflicts with channel stability and human safety. Where topography permits, another way to lower flood elevation is to lower the level of the floodway with drop structures into a large but subtly excavated bowl where flood flows are allowed to spread out.

Stream Corridor Planning

Urban streams receive and convey stormwater flows from developed or developing watersheds. Planning of stream corridors thus interacts with urban stormwater management programs. If local programs are intended to control or protect downstream environments by managing flows delivered to the channels, then it is logical that such programs should be supplemented by management of the materials, forms, and uses of the downstream riparian corridor. Any proposal for stream alteration or management should be investigated for its potential flow and stability effects on upstream, downstream, and laterally adjacent areas. The timing and rate of flow from various tributaries can combine in complex ways to alter flood hazards. Each section of channel is unique, influenced by its own distribution of roughness elements, management activities, and stream responses.

Flexibility to adapt to stream features and behaviors as they evolve must be included in stream reclamation planning. The amenity and ecology of streams may be enhanced through the landscape design options of 1) corridor reservation, 2) bank treatment, 3) geomorphic restoration, and 4) grade control.

Corridor reservation - Reserving stream corridors and valleys to accommodate natural stream meandering, aggradation, degradation, and over bank flows allows streams to find their own form and generate less ongoing erosion. In California, open stream corridors in recent urban developments have produced recreational open space, irrigation of streamside plantings, and the aesthetic amenity of flowing water.

Bank treatment - The use of armoring, vegetative cover, and flow deflection may be used to influence a channel's form, stability, and biotic habitat. To prevent bank erosion, armoring can be done with rigid construction materials, such as concrete, masonry, wood planks and logs, riprap, and gabions. Concrete linings have been criticized because of their lack of provision of biotic habitat. In contrast, riprap and gabions make relatively porous and flexible linings. Boulders, placed in the bed reduce velocity and erosive power.

Riparian vegetation can stabilize the banks of streams that are at or near a condition of equilibrium. Binding networks of roots increase bank shear strength. During flood flows, resilient vegetation is forced into erosion-inhibiting mats. The roughness of vegetation leads to lower velocity, further reducing erosive effects. Structural flow deflection can protect banks from erosion or alter fish habitat. By concentrating flow, a deflector causes a pool to be scoured in the bed.

Geomorphic restoration – Restoration refers to alteration of disturbed streams so their form and behavior emulate those of undisturbed streams. Natural meanders are retained, with grading to gentle slopes on the inside of curves to allow point bars and riffle-pool sequences to develop. Trees are retained to provide scenic quality, biotic productivity, and roots for bank stabilization, supplemented by plantings where necessary.

A restorative approach can be successful where the stream is already approaching equilibrium. However, if upstream urbanization continues new flow regimes will be generated that could disrupt the equilibrium of the treated system.

Grade Control - A grade control structure is a level shelf of a permanent material, such as stone, masonry, or concrete, over which stream water flows. A grade control structure is called a sill, weir, or drop structure, depending on the relation of its invert elevation to upstream and downstream channels.

A sill is installed at the preexisting channel bed elevation to prevent upstream migration of nick points. It establishes a firm base level below which the upstream channel can not erode.

A weir or check dam is installed with invert above the preexisting bed elevation. A weir raises the local base level of the stream and causes aggradation upstream. The gradient, velocity, and erosive potential of the stream channel are reduced. A drop structure lowers the downstream invert below its preexisting elevation, reducing downstream gradient and velocity. Weirs and drop structure control erosion by dissipating energy and reducing slope velocity.

SC-74 Drainage System Maintenance

When carefully applied, grade control structures can be highly versatile in establishing human and environmental benefits in stabilized channels. To be successful, application of grade control structures should be guided by analysis of the stream system both upstream and downstream from the area to be reclaimed.

Examples

The California Department of Water Resources began the Urban Stream Restoration Program in 1985. The program provides grant funds to municipalities and community groups to implement stream restoration projects. The projects reduce damages from streambank and watershed instability and floods while restoring streams' aesthetic, recreational, and fish and wildlife values.

In Buena Vista Park, upper floodway slopes are gentle and grassed to achieve continuity of usable park land across the channel of small boulders at the base of the slopes.

The San Diego River is a large, vegetative lined channel, which was planted in a variety of species to support riparian wildlife while stabilizing the steep banks of the floodway.

References and Resources

Ferguson, B.K. 1991. Urban Stream Reclamation, p. 324-322, *Journal of Soil and Water Conservation*.

Los Angeles County Stormwater Quality. Public Agency Activities Model Program. On-line: http://ladpw.org/wmd/npdes/public_TC.cfm

Model Urban Runoff Program: A How-To Guide for Developing Urban Runoff Programs for Small Municipalities. Prepared by City of Monterey, City of Santa Cruz, California Coastal Commission, Monterey Bay National Marine Sanctuary, Association of Monterey Bay Area Governments, Woodward-Clyde, Central Coast Regional Water Quality Control Board. July. 1998.

Orange County Stormwater Program
http://www.ocwatersheds.com/StormWater/swp_introduction.asp

Santa Clara Valley Urban Runoff Pollution Prevention Program. 1997 Urban Runoff Management Plan. September 1997, updated October 2000.

San Diego Stormwater Co-permittees Jurisdictional Urban Runoff Management Program (URMP) Municipal Activities Model Program Guidance. 2001. Project Clean Water. November.

United States Environmental Protection Agency (USEPA). 1999. Stormwater Management Fact Sheet Non-stormwater Discharges to Storm Sewers. EPA 832-F-99-022. Office of Water, Washington, D.C. September.

United States Environmental Protection Agency (USEPA). 1999. Stormwater O&M Fact Sheet Catch Basin Cleaning. EPA 832-F-99-011. Office of Water, Washington, D.C. September.

United States Environmental Protection Agency (USEPA). 2002. Pollution Prevention/Good Housekeeping for Municipal Operations Illegal Dumping Control. On line:
http://www.epa.gov/npdes/menuofbmps/poll_7.htm

United States Environmental Protection Agency (USEPA). 2002. Pollution Prevention/Good Housekeeping for Municipal Operations Storm Drain System Cleaning. On line:
http://www.epa.gov/npdes/menuofbmps/poll_16.htm



Design Objectives

- Maximize Infiltration
- Provide Retention
- Slow Runoff
- Minimize Impervious Land Coverage
- ☒ Prohibit Dumping of Improper Materials
- Contain Pollutants
- Collect and Convey

Description

Waste materials dumped into storm drain inlets can have severe impacts on receiving and ground waters. Posting notices regarding discharge prohibitions at storm drain inlets can prevent waste dumping. Storm drain signs and stencils are highly visible source controls that are typically placed directly adjacent to storm drain inlets.

Approach

The stencil or affixed sign contains a brief statement that prohibits dumping of improper materials into the urban runoff conveyance system. Storm drain messages have become a popular method of alerting the public about the effects of and the prohibitions against waste disposal.

Suitable Applications

Stencils and signs alert the public to the destination of pollutants discharged to the storm drain. Signs are appropriate in residential, commercial, and industrial areas, as well as any other area where contributions or dumping to storm drains is likely.

Design Considerations

Storm drain message markers or placards are recommended at all storm drain inlets within the boundary of a development project. The marker should be placed in clear sight facing toward anyone approaching the inlet from either side. All storm drain inlet locations should be identified on the development site map.

Designing New Installations

The following methods should be considered for inclusion in the project design and show on project plans:

- Provide stenciling or labeling of all storm drain inlets and catch basins, constructed or modified, within the project area with prohibitive language. Examples include “NO DUMPING



– DRAINS TO OCEAN” and/or other graphical icons to discourage illegal dumping.

- Post signs with prohibitive language and/or graphical icons, which prohibit illegal dumping at public access points along channels and creeks within the project area.

Note - Some local agencies have approved specific signage and/or storm drain message placards for use. Consult local agency stormwater staff to determine specific requirements for placard types and methods of application.

Redeveloping Existing Installations

Various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.) define “redevelopment” in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land disturbing activities with structural or impervious surfaces. If the project meets the definition of “redevelopment”, then the requirements stated under “designing new installations” above should be included in all project design plans.

Additional Information

Maintenance Considerations

- Legibility of markers and signs should be maintained. If required by the agency with jurisdiction over the project, the owner/operator or homeowner’s association should enter into a maintenance agreement with the agency or record a deed restriction upon the property title to maintain the legibility of placards or signs.

Placement

- Signage on top of curbs tends to weather and fade.
- Signage on face of curbs tends to be worn by contact with vehicle tires and sweeper brooms.

Supplemental Information

Examples

- Most MS4 programs have storm drain signage programs. Some MS4 programs will provide stencils, or arrange for volunteers to stencil storm drains as part of their outreach program.

Other Resources

A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.



Design Considerations

- Tributary Area
- Area Required
- Slope
- Water Availability

Description

Vegetated swales are open, shallow channels with vegetation covering the side slopes and bottom that collect and slowly convey runoff flow to downstream discharge points. They are designed to treat runoff through filtering by the vegetation in the channel, filtering through a subsoil matrix, and/or infiltration into the underlying soils. Swales can be natural or manmade. They trap particulate pollutants (suspended solids and trace metals), promote infiltration, and reduce the flow velocity of stormwater runoff. Vegetated swales can serve as part of a stormwater drainage system and can replace curbs, gutters and storm sewer systems.

California Experience

Caltrans constructed and monitored six vegetated swales in southern California. These swales were generally effective in reducing the volume and mass of pollutants in runoff. Even in the areas where the annual rainfall was only about 10 inches/yr, the vegetation did not require additional irrigation. One factor that strongly affected performance was the presence of large numbers of gophers at most of the sites. The gophers created earthen mounds, destroyed vegetation, and generally reduced the effectiveness of the controls for TSS reduction.

Advantages

- If properly designed, vegetated, and operated, swales can serve as an aesthetic, potentially inexpensive urban development or roadway drainage conveyance measure with significant collateral water quality benefits.

Targeted Constituents

☒	Sediment	▲
☒	Nutrients	●
☒	Trash	●
☒	Metals	▲
☒	Bacteria	●
☒	Oil and Grease	▲
☒	Organics	▲

Legend (Removal Effectiveness)

- Low
- High
- ▲ Medium



- Roadside ditches should be regarded as significant potential swale/buffer strip sites and should be utilized for this purpose whenever possible.

Limitations

- Can be difficult to avoid channelization.
- May not be appropriate for industrial sites or locations where spills may occur
- Grassed swales cannot treat a very large drainage area. Large areas may be divided and treated using multiple swales.
- A thick vegetative cover is needed for these practices to function properly.
- They are impractical in areas with steep topography.
- They are not effective and may even erode when flow velocities are high, if the grass cover is not properly maintained.
- In some places, their use is restricted by law: many local municipalities require curb and gutter systems in residential areas.
- Swales are more susceptible to failure if not properly maintained than other treatment BMPs.

Design and Sizing Guidelines

- Flow rate based design determined by local requirements or sized so that 85% of the annual runoff volume is discharged at less than the design rainfall intensity.
- Swale should be designed so that the water level does not exceed 2/3rds the height of the grass or 4 inches, whichever is less, at the design treatment rate.
- Longitudinal slopes should not exceed 2.5%
- Trapezoidal channels are normally recommended but other configurations, such as parabolic, can also provide substantial water quality improvement and may be easier to mow than designs with sharp breaks in slope.
- Swales constructed in cut are preferred, or in fill areas that are far enough from an adjacent slope to minimize the potential for gopher damage. Do not use side slopes constructed of fill, which are prone to structural damage by gophers and other burrowing animals.
- A diverse selection of low growing, plants that thrive under the specific site, climatic, and watering conditions should be specified. Vegetation whose growing season corresponds to the wet season are preferred. Drought tolerant vegetation should be considered especially for swales that are not part of a regularly irrigated landscaped area.
- The width of the swale should be determined using Manning's Equation using a value of 0.25 for Manning's n.

Construction/Inspection Considerations

- Include directions in the specifications for use of appropriate fertilizer and soil amendments based on soil properties determined through testing and compared to the needs of the vegetation requirements.
- Install swales at the time of the year when there is a reasonable chance of successful establishment without irrigation; however, it is recognized that rainfall in a given year may not be sufficient and temporary irrigation may be used.
- If sod tiles must be used, they should be placed so that there are no gaps between the tiles; stagger the ends of the tiles to prevent the formation of channels along the swale or strip.
- Use a roller on the sod to ensure that no air pockets form between the sod and the soil.
- Where seeds are used, erosion controls will be necessary to protect seeds for at least 75 days after the first rainfall of the season.

Performance

The literature suggests that vegetated swales represent a practical and potentially effective technique for controlling urban runoff quality. While limited quantitative performance data exists for vegetated swales, it is known that check dams, slight slopes, permeable soils, dense grass cover, increased contact time, and small storm events all contribute to successful pollutant removal by the swale system. Factors decreasing the effectiveness of swales include compacted soils, short runoff contact time, large storm events, frozen ground, short grass heights, steep slopes, and high runoff velocities and discharge rates.

Conventional vegetated swale designs have achieved mixed results in removing particulate pollutants. A study performed by the Nationwide Urban Runoff Program (NURP) monitored three grass swales in the Washington, D.C., area and found no significant improvement in urban runoff quality for the pollutants analyzed. However, the weak performance of these swales was attributed to the high flow velocities in the swales, soil compaction, steep slopes, and short grass height.

Another project in Durham, NC, monitored the performance of a carefully designed artificial swale that received runoff from a commercial parking lot. The project tracked 11 storms and concluded that particulate concentrations of heavy metals (Cu, Pb, Zn, and Cd) were reduced by approximately 50 percent. However, the swale proved largely ineffective for removing soluble nutrients.

The effectiveness of vegetated swales can be enhanced by adding check dams at approximately 17 meter (50 foot) increments along their length (See Figure 1). These dams maximize the retention time within the swale, decrease flow velocities, and promote particulate settling. Finally, the incorporation of vegetated filter strips parallel to the top of the channel banks can help to treat sheet flows entering the swale.

Only 9 studies have been conducted on all grassed channels designed for water quality (Table 1). The data suggest relatively high removal rates for some pollutants, but negative removals for some bacteria, and fair performance for phosphorus.

Table 1 Grassed swale pollutant removal efficiency data

Removal Efficiencies (% Removal)							
Study	TSS	TP	TN	NO ₃	Metals	Bacteria	Type
Caltrans 2002	77	8	67	66	83-90	-33	dry swales
Goldberg 1993	67.8	4.5	-	31.4	42-62	-100	grassed channel
Seattle Metro and Washington Department of Ecology 1992	60	45	-	-25	2-16	-25	grassed channel
Seattle Metro and Washington Department of Ecology, 1992	83	29	-	-25	46-73	-25	grassed channel
Wang et al., 1981	80	-	-	-	70-80	-	dry swale
Dorman et al., 1989	98	18	-	45	37-81	-	dry swale
Harper, 1988	87	83	84	80	88-90	-	dry swale
Kercher et al., 1983	99	99	99	99	99	-	dry swale
Harper, 1988.	81	17	40	52	37-69	-	wet swale
Koon, 1995	67	39	-	9	-35 to 6	-	wet swale

While it is difficult to distinguish between different designs based on the small amount of available data, grassed channels generally have poorer removal rates than wet and dry swales, although some swales appear to export soluble phosphorus (Harper, 1988; Koon, 1995). It is not clear why swales export bacteria. One explanation is that bacteria thrive in the warm swale soils.

Siting Criteria

The suitability of a swale at a site will depend on land use, size of the area serviced, soil type, slope, imperviousness of the contributing watershed, and dimensions and slope of the swale system (Schueler et al., 1992). In general, swales can be used to serve areas of less than 10 acres, with slopes no greater than 5 %. Use of natural topographic lows is encouraged and natural drainage courses should be regarded as significant local resources to be kept in use (Young et al., 1996).

Selection Criteria (NCTCOG, 1993)

- Comparable performance to wet basins
- Limited to treating a few acres
- Availability of water during dry periods to maintain vegetation
- Sufficient available land area

Research in the Austin area indicates that vegetated controls are effective at removing pollutants even when dormant. Therefore, irrigation is not required to maintain growth during dry periods, but may be necessary only to prevent the vegetation from dying.

The topography of the site should permit the design of a channel with appropriate slope and cross-sectional area. Site topography may also dictate a need for additional structural controls. Recommendations for longitudinal slopes range between 2 and 6 percent. Flatter slopes can be used, if sufficient to provide adequate conveyance. Steep slopes increase flow velocity, decrease detention time, and may require energy dissipating and grade check. Steep slopes also can be managed using a series of check dams to terrace the swale and reduce the slope to within acceptable limits. The use of check dams with swales also promotes infiltration.

Additional Design Guidelines

Most of the design guidelines adopted for swale design specify a minimum hydraulic residence time of 9 minutes. This criterion is based on the results of a single study conducted in Seattle, Washington (Seattle Metro and Washington Department of Ecology, 1992), and is not well supported. Analysis of the data collected in that study indicates that pollutant removal at a residence time of 5 minutes was not significantly different, although there is more variability in that data. Therefore, additional research in the design criteria for swales is needed. Substantial pollutant removal has also been observed for vegetated controls designed solely for conveyance (Barrett et al, 1998); consequently, some flexibility in the design is warranted.

Many design guidelines recommend that grass be frequently mowed to maintain dense coverage near the ground surface. Recent research (Colwell et al., 2000) has shown mowing frequency or grass height has little or no effect on pollutant removal.

Summary of Design Recommendations

- 1) The swale should have a length that provides a minimum hydraulic residence time of at least 10 minutes. The maximum bottom width should not exceed 10 feet unless a dividing berm is provided. The depth of flow should not exceed 2/3rds the height of the grass at the peak of the water quality design storm intensity. The channel slope should not exceed 2.5%.
- 2) A design grass height of 6 inches is recommended.
- 3) Regardless of the recommended detention time, the swale should be not less than 100 feet in length.
- 4) The width of the swale should be determined using Manning's Equation, at the peak of the design storm, using a Manning's n of 0.25.
- 5) The swale can be sized as both a treatment facility for the design storm and as a conveyance system to pass the peak hydraulic flows of the 100-year storm if it is located "on-line." The side slopes should be no steeper than 3:1 (H:V).
- 6) Roadside ditches should be regarded as significant potential swale/buffer strip sites and should be utilized for this purpose whenever possible. If flow is to be introduced through curb cuts, place pavement slightly above the elevation of the vegetated areas. Curb cuts should be at least 12 inches wide to prevent clogging.
- 7) Swales must be vegetated in order to provide adequate treatment of runoff. It is important to maximize water contact with vegetation and the soil surface. For general purposes, select fine, close-growing, water-resistant grasses. If possible, divert runoff (other than necessary irrigation) during the period of vegetation

establishment. Where runoff diversion is not possible, cover graded and seeded areas with suitable erosion control materials.

Maintenance

The useful life of a vegetated swale system is directly proportional to its maintenance frequency. If properly designed and regularly maintained, vegetated swales can last indefinitely. The maintenance objectives for vegetated swale systems include keeping up the hydraulic and removal efficiency of the channel and maintaining a dense, healthy grass cover.

Maintenance activities should include periodic mowing (with grass never cut shorter than the design flow depth), weed control, watering during drought conditions, reseeding of bare areas, and clearing of debris and blockages. Cuttings should be removed from the channel and disposed in a local composting facility. Accumulated sediment should also be removed manually to avoid concentrated flows in the swale. The application of fertilizers and pesticides should be minimal.

Another aspect of a good maintenance plan is repairing damaged areas within a channel. For example, if the channel develops ruts or holes, it should be repaired utilizing a suitable soil that is properly tamped and seeded. The grass cover should be thick; if it is not, reseed as necessary. Any standing water removed during the maintenance operation must be disposed to a sanitary sewer at an approved discharge location. Residuals (e.g., silt, grass cuttings) must be disposed in accordance with local or State requirements. Maintenance of grassed swales mostly involves maintenance of the grass or wetland plant cover. Typical maintenance activities are summarized below:

- Inspect swales at least twice annually for erosion, damage to vegetation, and sediment and debris accumulation preferably at the end of the wet season to schedule summer maintenance and before major fall runoff to be sure the swale is ready for winter. However, additional inspection after periods of heavy runoff is desirable. The swale should be checked for debris and litter, and areas of sediment accumulation.
- Grass height and mowing frequency may not have a large impact on pollutant removal. Consequently, mowing may only be necessary once or twice a year for safety or aesthetics or to suppress weeds and woody vegetation.
- Trash tends to accumulate in swale areas, particularly along highways. The need for litter removal is determined through periodic inspection, but litter should always be removed prior to mowing.
- Sediment accumulating near culverts and in channels should be removed when it builds up to 75 mm (3 in.) at any spot, or covers vegetation.
- Regularly inspect swales for pools of standing water. Swales can become a nuisance due to mosquito breeding in standing water if obstructions develop (e.g. debris accumulation, invasive vegetation) and/or if proper drainage slopes are not implemented and maintained.

Cost

Construction Cost

Little data is available to estimate the difference in cost between various swale designs. One study (SWRPC, 1991) estimated the construction cost of grassed channels at approximately \$0.25 per ft². This price does not include design costs or contingencies. Brown and Schueler (1997) estimate these costs at approximately 32 percent of construction costs for most stormwater management practices. For swales, however, these costs would probably be significantly higher since the construction costs are so low compared with other practices. A more realistic estimate would be a total cost of approximately \$0.50 per ft², which compares favorably with other stormwater management practices.

Table 2 Swale Cost Estimate (SEWRPC, 1991)

Component	Unit	Extent	Unit Cost			Total Cost		
			Low	Moderate	High	Low	Moderate	High
Mobilization / Demobilization-Light	Swale	1	\$107	\$274	\$441	\$107	\$274	\$441
Site Preparation								
Clearing ^b	Acre	0.5	\$2,200	\$3,800	\$5,400	\$1,100	\$1,900	\$2,700
Grubbing ^c	Acre	0.25	\$3,800	\$5,200	\$6,600	\$950	\$1,300	\$1,650
General Excavation ^d	Yd ³	372	\$2.10	\$3.70	\$5.30	\$781	\$1,376	\$1,972
Level and Till ^e	Yd ²	1,210	\$0.20	\$0.35	\$0.50	\$242	\$424	\$605
Sites Development								
Salvaged Topsoil	Yd ²	1,210	\$0.40	\$1.00	\$1.60	\$484	\$1,210	\$1,936
Seed, and Mulch ^f ..	Yd ²	1,210	\$1.20	\$2.40	\$3.60	\$1,452	\$2,904	\$4,356
Sod ^g								
Subtotal	--	--	--	--	--	\$5,116	\$9,388	\$13,660
Contingencies	Swale	1	25%	25%	25%	\$1,279	\$2,347	\$3,415
Total	--	--	--	--	--	\$6,395	\$11,735	\$17,075

Source: (SEWRPC, 1991)

Note: Mobilization/demobilization refers to the organization and planning involved in establishing a vegetative swale.

^a Swale has a bottom width of 1.0 foot, a top width of 10 feet with 1:3 side slopes, and a 1,000-foot length.^b Area cleared = (top width + 10 feet) x swale length.^c Area grubbed = (top width x swale length).^d Volume excavated = (0.67 x top width x swale depth) x swale length (parabolic cross-section).^e Area tilled = (top width + $\frac{8(\text{swale depth}^2)}{3(\text{top width})}$) x swale length (parabolic cross-section).^f Area seeded = area cleared x 0.5.^g Area sodded = area cleared x 0.5.

Table 3 Estimated Maintenance Costs (SEWRPC, 1991)

Component	Unit Cost	Swale Size (Depth and Top Width)		Comment
		1.5 Foot Depth, One-Foot Bottom Width, 10-Foot Top Width	3-Foot Depth, 3-Foot Bottom Width, 21-Foot Top Width	
Lawn Mowing	\$0.85 / 1,000 ft ² / mowing	\$0.14 / linear foot	\$0.21 / linear foot	Lawn maintenance area = (top width + 10 feet) x length. Mow eight times per year
General Lawn Care	\$9.00 / 1,000 ft ² / year	\$0.18 / linear foot	\$0.28 / linear foot	Lawn maintenance area = (top width + 10 feet) x length
Swale Debris and Litter Removal	\$0.10 / linear foot / year	\$0.10 / linear foot	\$0.10 / linear foot	—
Grass Reseeding with Mulch and Fertilizer	\$0.30 / yd ²	\$0.01 / linear foot	\$0.01 / linear foot	Area revegetated equals 1% of lawn maintenance area per year
Program Administration and Swale Inspection	\$0.15 / linear foot / year, plus \$25 / inspection	\$0.15 / linear foot	\$0.15 / linear foot	Inspect four times per year
Total	--	\$0.58 / linear foot	\$ 0.75 / linear foot	--

Maintenance Cost

Caltrans (2002) estimated the expected annual maintenance cost for a swale with a tributary area of approximately 2 ha at approximately \$2,700. Since almost all maintenance consists of mowing, the cost is fundamentally a function of the mowing frequency. Unit costs developed by SEWRPC are shown in Table 3. In many cases vegetated channels would be used to convey runoff and would require periodic mowing as well, so there may be little additional cost for the water quality component. Since essentially all the activities are related to vegetation management, no special training is required for maintenance personnel.

References and Sources of Additional Information

Barrett, Michael E., Walsh, Patrick M., Malina, Joseph F., Jr., Charbeneau, Randall J, 1998, "Performance of vegetative controls for treating highway runoff," *ASCE Journal of Environmental Engineering*, Vol. 124, No. 11, pp. 1121-1128.

Brown, W., and T. Schueler. 1997. *The Economics of Stormwater BMPs in the Mid-Atlantic Region*. Prepared for the Chesapeake Research Consortium, Edgewater, MD, by the Center for Watershed Protection, Ellicott City, MD.

Center for Watershed Protection (CWP). 1996. *Design of Stormwater Filtering Systems*. Prepared for the Chesapeake Research Consortium, Solomons, MD, and USEPA Region V, Chicago, IL, by the Center for Watershed Protection, Ellicott City, MD.

Colwell, Shanti R., Horner, Richard R., and Booth, Derek B., 2000. *Characterization of Performance Predictors and Evaluation of Mowing Practices in Biofiltration Swales*. Report to King County Land And Water Resources Division and others by Center for Urban Water Resources Management, Department of Civil and Environmental Engineering, University of Washington, Seattle, WA

Dorman, M.E., J. Hartigan, R.F. Steg, and T. Quasebarth. 1989. *Retention, Detention and Overland Flow for Pollutant Removal From Highway Stormwater Runoff. Vol. 1*. FHWA/RD 89/202. Federal Highway Administration, Washington, DC.

Goldberg. 1993. *Dayton Avenue Swale Biofiltration Study*. Seattle Engineering Department, Seattle, WA.

Harper, H. 1988. *Effects of Stormwater Management Systems on Groundwater Quality*. Prepared for Florida Department of Environmental Regulation, Tallahassee, FL, by Environmental Research and Design, Inc., Orlando, FL.

Kercher, W.C., J.C. Landon, and R. Massarelli. 1983. Grassy swales prove cost-effective for water pollution control. *Public Works*, 16: 53-55.

Koon, J. 1995. *Evaluation of Water Quality Ponds and Swales in the Issaquah/East Lake Sammamish Basins*. King County Surface Water Management, Seattle, WA, and Washington Department of Ecology, Olympia, WA.

Metzger, M. E., D. F. Messer, C. L. Beitia, C. M. Myers, and V. L. Kramer. 2002. The Dark Side Of Stormwater Runoff Management: Disease Vectors Associated With Structural BMPs. *Stormwater* 3(2): 24-39. Oakland, P.H. 1983. An evaluation of stormwater pollutant removal

through grassed swale treatment. In *Proceedings of the International Symposium of Urban Hydrology, Hydraulics and Sediment Control*, Lexington, KY. pp. 173–182.

Occoquan Watershed Monitoring Laboratory. 1983. Final Report: **Metropolitan Washington Urban Runoff Project**. Prepared for the Metropolitan Washington Council of Governments, Washington, DC, by the Occoquan Watershed Monitoring Laboratory, Manassas, VA.

Pitt, R., and J. McLean. 1986. **Toronto Area Watershed Management Strategy Study: Humber River Pilot Watershed Project**. Ontario Ministry of Environment, Toronto, ON.

Schueler, T. 1997. Comparative Pollutant Removal Capability of Urban BMPs: A reanalysis. *Watershed Protection Techniques* 2(2):379–383.

Seattle Metro and Washington Department of Ecology. 1992. **Biofiltration Swale Performance: Recommendations and Design Considerations**. Publication No. 657. Water Pollution Control Department, Seattle, WA.

Southeastern Wisconsin Regional Planning Commission (SWRPC). 1991. **Costs of Urban Nonpoint Source Water Pollution Control Measures**. Technical report no. 31. Southeastern Wisconsin Regional Planning Commission, Waukesha, WI.

U.S. EPA, 1999, Stormwater Fact Sheet: Vegetated Swales, Report # 832-F-99-006 <http://www.epa.gov/owm/mtb/vegswale.pdf>, Office of Water, Washington DC.

Wang, T., D. Spyridakis, B. Mar, and R. Horner. 1981. **Transport, Deposition and Control of Heavy Metals in Highway Runoff**. FHWA-WA-RD-39-10. University of Washington, Department of Civil Engineering, Seattle, WA.

Washington State Department of Transportation, 1995, **Highway Runoff Manual**, Washington State Department of Transportation, Olympia, Washington.

Welborn, C., and J. Veenhuis. 1987. **Effects of Runoff Controls on the Quantity and Quality of Urban Runoff in Two Locations in Austin, TX**. USGS Water Resources Investigations Report No. 87-4004. U.S. Geological Survey, Reston, VA.

Yousef, Y., M. Wanielista, H. Harper, D. Pearce, and R. Tolbert. 1985. **Best Management Practices: Removal of Highway Contaminants By Roadside Swales**. University of Central Florida and Florida Department of Transportation, Orlando, FL.

Yu, S., S. Barnes, and V. Gerde. 1993. **Testing of Best Management Practices for Controlling Highway Runoff**. FHWA/VA-93-R16. Virginia Transportation Research Council, Charlottesville, VA.

Information Resources


Maryland Department of the Environment (MDE). 2000. **Maryland Stormwater Design Manual**. www.mde.state.md.us/environment/wma/stormwatermanual. Accessed May 22, 2001.

Reeves, E. 1994. Performance and Condition of Biofilters in the Pacific Northwest. *Watershed Protection Techniques* 1(3):117–119.

Seattle Metro and Washington Department of Ecology. 1992. ***Biofiltration Swale Performance***. Recommendations and Design Considerations. Publication No. 657. Seattle Metro and Washington Department of Ecology, Olympia, WA.

USEPA 1993. ***Guidance Specifying Management Measures for Sources of Nonpoint Pollution in Coastal Waters***. EPA-840-B-92-002. U.S. Environmental Protection Agency, Office of Water. Washington, DC.

Watershed Management Institute (WMI). 1997. ***Operation, Maintenance, and Management of Stormwater Management Systems***. Prepared for U.S. Environmental Protection Agency, Office of Water. Washington, DC, by the Watershed Management Institute, Ingleside, MD.

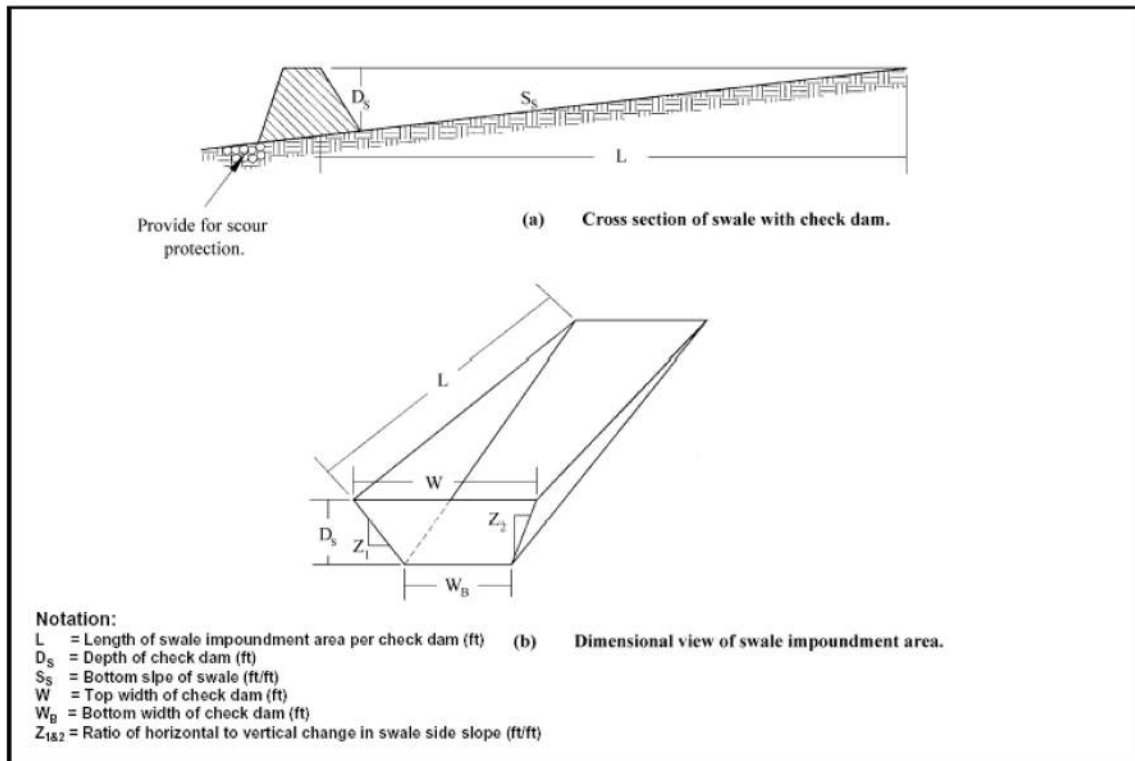

Description

Water quality inlets (WQIs), also commonly called trapping catch basins, oil/grit separators or oil/water separators, consist of one or more chambers that promote sedimentation of coarse materials and separation of free oil (as opposed to emulsified or dissolved oil) from stormwater. Some WQIs also contain screens to help retain larger or floating debris, and many of the newer designs also include a coalescing unit that helps promote oil/water separation. A typical WQI, as shown in the schematic, consists of a sedimentation chamber, an oil separation chamber, and a discharge chamber.

These devices are appropriate for capturing hydrocarbon spills, but provide very marginal sediment removal and are not very effective for treatment of stormwater runoff. WQIs typically capture only the first portion of runoff for treatment and are generally used for pretreatment before discharging to other best management practices (BMPs).

California Experience

Caltrans investigated the use of coalescing plate oil/water separators at maintenance stations in Southern California. Twenty-two maintenance stations were originally considered for implementation of this technology; however, only one site appeared to have concentrations that were sufficiently high to warrant installation of an oil-water separator. Concentrations of free oil in stormwater runoff observed during the course of the study even from this site were too low for effective operation of this technology, and no free oil was ever captured by the device.

Advantages

- Can provide spill control.

Limitations

- WQIs generally provide limited hydraulic and residuals storage. Due to the limited storage, WQIs do not provide substantial stormwater improvement.
- Standing water in the devices can provide a breeding ground for mosquitoes.
- Certain designs maintain permanent sources of standing water where mosquito and other vector breeding may occur.

Design and Sizing Guidelines

- Water quality inlets are most effective for spill control and should be sized accordingly.

Design Considerations

- Area Required

Targeted Constituents

✓	Sediment	●
✓	Nutrients	●
✓	Trash	▲
✓	Metals	●
✓	Bacteria	●
✓	Oil and Grease	▲
✓	Organics	●

Legend (Removal Effectiveness)

- Low
- High
- ▲ Medium



- Designs that utilize covered sedimentation and filtration basins should be accessible to vector control personnel via access doors to facilitate vector surveillance and controlling the basins if needed.

Performance

WQIs are primarily utilized to remove sediment from stormwater runoff. Grit and sediment are partially removed by gravity settling within the first two chambers. A WQI with a detention time of 1 hour may expect to have 20 to 40 percent removal of sediments. Hydrocarbons associated with the accumulated sediments are also often removed from the runoff through this process. The WQI achieves slight, if any, removal of nutrients, metals and organic pollutants other than free petroleum products (Schueler, 1992).

A 1993 MWCOG study found that an average of less than 5 centimeters (2 inches) of sediments (mostly coarse-grained grit and organic matter) were trapped in the WQIs. Hydrocarbon and total organic carbon (TOC) concentrations of the sediments averaged 8,150 and 53,900 milligrams per kilogram, respectively. The mean hydrocarbon concentration in the WQI water column was 10 milligrams per liter. The study also indicated that sediment accumulation did not increase over time, suggesting that the sediments become re-suspended during storm events. The authors concluded that although the WQI effectively separates oil and grease from water, re-suspension of the settled matter appears to limit removal efficiencies. Actual removal only occurs when the residuals are removed from the WQI (Schueler 1992).

A 1990 report by API found that the efficiency of oil and water separation in a WQI is inversely proportional to the ratio of the discharge rate to the unit's surface area. Due to the small capacity of the WQI, the discharge rate is typically very high and the detention time is very short. For example, the MWCOG study found that the average detention time in a WQI is less than 0.5 hour. This can result in minimal pollutant settling (API, 1990). However, the addition of coalescing units in many current WQI units may increase oil/water separation efficiency. Most coalescing units are designed to achieve a specific outlet concentration of oil and grease (for example, 10-15 mg/L oil and grease).

Pollutant removal in stormwater inlets can be somewhat improved using inserts, which are promoted for removal of oil and grease, trash, debris, and sediment. Some inserts are designed to drop directly into existing catch basins, while others may require extensive retrofit construction.

Siting Criteria

Oil/water separation units are often utilized in specific industrial areas, such as airport aprons, equipment washdown areas, or vehicle storage areas. In these instances, runoff from the area of concern will usually be diverted directly into the unit, while all other runoff is sent to the storm drain downstream from the oil/water separator. Oil/water separation tanks are often fitted with diffusion baffles at the inlets to prevent turbulent flow from entering the unit and resuspending settled pollutants.

Additional Design Guidelines

Prior to WQI design, the site should be evaluated to determine if another BMP would be more cost-effective in removing the pollutants of concern. WQIs should be used when no other BMP is feasible. The WQI should be constructed near a storm drain network so that flow can be easily diverted to the WQI for treatment (NVPDC, 1992). Any construction activities within the

drainage area should be completed before installation of the WQI, and the drainage area should be revegetated so that the sediment loading to the WQI is minimized.

WQIs are most effective for small drainage areas. Drainage areas of 0.4 hectares (1 acre) or less are often recommended. WQIs are typically used in an off-line configuration (i.e., portions of runoff are diverted to the WQI), but they can be used as on-line units (i.e., receive all runoff). Generally, off-line units are designed to handle the first 1.3 centimeters (0.5 inches) of runoff from the drainage areas. Upstream isolation/diversion structures can be used to divert the water to the off-line structure (Schueler, 1992). On-line units receive higher flows that will likely cause increased turbulence and resuspension of settled material, thereby reducing WQI performance.

Oil/water separation tanks are often fitted with diffusion baffles at the inlets to prevent turbulent flow from entering the unit and resuspending settled pollutants. WQIs are available as pre-manufactured units or can be cast in place. Reinforced concrete should be used to construct below-grade WQIs. The WQIs should be water tight to prevent possible ground water contamination.

Maintenance

Typical maintenance of WQIs includes trash removal if a screen or other debris capturing device is used, and removal of sediment using a vacuum truck. Operators need to be properly trained in WQI maintenance. Maintenance should include keeping a log of the amount of sediment collected and the date of removal. Some cities have incorporated the use of GIS systems to track sediment collection and to optimize future catch basin cleaning efforts.

One study (Pitt, 1985) concluded that WQIs can capture sediments up to approximately 60 percent of the sump volume. When sediment fills greater than 60 percent of their volume, catch basins reach steady state. Storm flows can then resuspend sediments trapped in the catch basin, and will bypass treatment. Frequent clean-out can retain the volume in the catch basin sump available for treatment of stormwater flows.

At a minimum, these inlets should be cleaned at least twice during the wet season. Two studies suggest that increasing the frequency of maintenance can improve the performance of catch basins, particularly in industrial or commercial areas. One study of 60 catch basins in Alameda County, California, found that increasing the maintenance frequency from once per year to twice per year could increase the total sediment removed by catch basins on an annual basis (Mineart and Singh, 1994). Annual sediment removed per inlet was 54 pounds for annual cleaning, 70 pounds for semi-annual and quarterly cleaning, and 160 pounds for monthly cleaning. For catch basins draining industrial uses, monthly cleaning increased total annual sediment collected to six times the amount collected by annual cleaning (180 pounds versus 30 pounds). These results suggest that, at least for industrial uses, more frequent cleaning of catch basins may improve efficiency.

BMPs designed with permanent water sumps, vaults, and/or catch basins (frequently installed below-ground) can become a nuisance due to mosquito and other vector breeding. Preventing mosquito access to standing water sources in BMPs (particularly below-ground) is the best prevention plan, but can prove challenging due to multiple entrances and the need to maintain the hydraulic integrity of the system. BMPs that maintain permanent standing water may require routine inspections and treatments by local mosquito and vector control agencies to

suppress mosquito production. Standing water in oil/water separators may contain sufficient floating hydrocarbons to prevent mosquito breeding, but this is not a reliable control alternative to vector exclusion or chemical treatment.

Cost

A typical pre-cast catch basin costs between \$2,000 and \$3,000; however, oil/water separators can be much more expensive. The true pollutant removal cost associated with catch basins, however, is the long-term maintenance cost. A vactor truck, the most common method of catch basin cleaning, costs between \$125,000 and \$150,000. This initial cost may be high for smaller Phase II communities. However, it may be possible to share a vactor truck with another community. Typical vactor trucks can store between 10 and 15 cubic yards of material, which is enough storage for three to five catch basins. Assuming semi-annual cleaning, and that the vactor truck could be filled and material disposed of twice in one day, one truck would be sufficient to clean between 750 and 1,000 catch basins. Another maintenance cost is the staff time needed to operate the truck. Depending on the regulations within a community, disposal costs of the sediment captured in catch basins may be significant.

References and Sources of Additional Information

American Petroleum Institute (API), 1990. *Monographs on Refinery Environmental Control - Management of Water Discharges (Design and Operation of Oil-Water Separators)*. Publication 421, First Edition.

Aronson, G., D. Watson, and W. Pisaro. *Evaluation of Catch Basin Performance for Urban Stormwater Pollution Control*. U.S. Environmental Protection Agency, Washington, DC.

Berg, V.H., 1991. *Water Quality Inlets (Oil/Grit Separators)*. Maryland Department of the Environment, Sediment and Stormwater Administration.

Lager, J., W. Smith, R. Finn, and E. Finnemore. 1977. *Urban Stormwater Management and Technology: Update and Users' Guide*. Prepared for U.S. Environmental Protection Agency. EPA-600/8-77-014. 313 pp.

Metropolitan Washington Council of Governments (MWCOC), 1993. *The Quality of Trapped Sediments and Pool Water Within Oil Grit Separators in Suburban Maryland*. Interim Report.

Metzger, M. E., D. F. Messer, C. L. Beitia, C. M. Myers, and V. L. Kramer. 2002. The Dark Side Of Stormwater Runoff Management: Disease Vectors Associated With Structural Bmps. *Stormwater* 3(2): 24-39.

Metzger, M. E., and S. Kluh. 2003. Surface Hydrocarbons Vs. Mosquito Breeding. *Stormwater* 4(1): 10.

Mineart, P., and S. Singh. 1994. *Storm Inlet Pilot Study*. Alameda County Urban Runoff Clean Water Program, Oakland, CA.


Northern Virginia Planning District Commission (NVPDC) and Engineers and Surveyors Institute, 1992. *Northern Virginia BMP Handbook*.

Pitt, R., and P. Bissonnette. 1984. *Bellevue Urban Runoff Program Summary Report*. U.S. Environmental Protection Agency, Water Planning Division, Washington, DC.

Pitt, R., M. Lilburn, S. Nix, S.R. Durrans, S. Burian, J. Voorhees, and J. Martinson. 2000. *Guidance Manual for Integrated Wet Weather Flow (WWF) Collection and Treatment Systems for Newly Urbanized Areas (New WWF Systems)*. U.S. Environmental Protection Agency, Office of Research and Development, Cincinnati, OH.

Schueler, T.R., 1992. *A Current Assessment of Urban Best Management Practices*. Metropolitan Washington Council of Governments.

U.S. EPA, 1999, Stormwater Technology Fact Sheet: Water Quality Inlets, EPA 832-F-99-029, Office of Water, Washington DC.

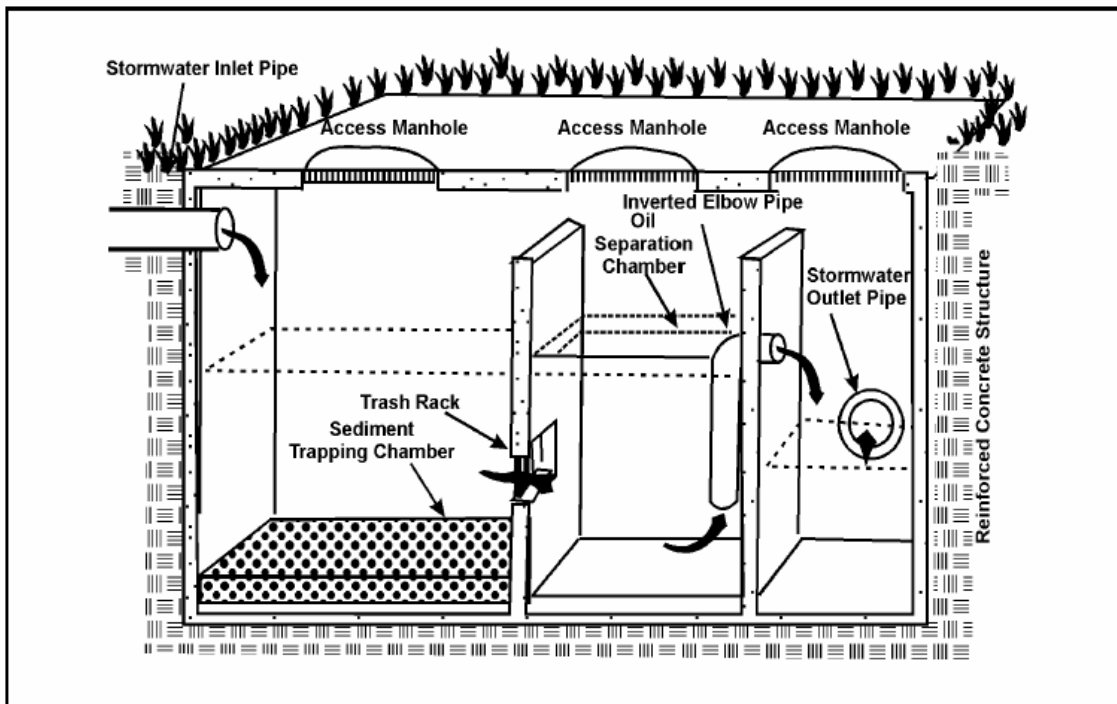



Landscaping and garden maintenance activities can be major contributors to water pollution. Soils, yard wastes, over-watering and garden chemicals become part of the urban runoff mix that winds its way through streets, gutters and storm drains before entering lakes, rivers, streams, etc. Urban runoff pollution contaminates water and harms aquatic life!

In Riverside County, report illegal discharges into the storm drain, call
1-800-506-2555
"Only Rain Down the Storm Drain"

Important Links:

Riverside County Household Hazardous Waste Collection Information
1-800-304-2226 or www.rivcowm.org

Riverside County Backyard Composting Program
1-800-366-SAVE

Integrated Pest Management (IPM) Solutions
www.ipm.ucdavis.edu

California Master Gardener Programs
www.mastergardeners.org
www.camastergardeners.ucdavis.edu

California Native Plant Society
www.cnps.org

The Riverside County "Only Rain Down the Storm Drain" Pollution Prevention Program gratefully acknowledges Orange County's Storm Water Program for their contribution to this brochure.




...Only Rain Down ...the Storm Drain

*What you should know for...
Landscape and Gardening*

Best Management tips for:

- Professionals
- Novices
- Landscapers
- Gardeners
- Cultivators

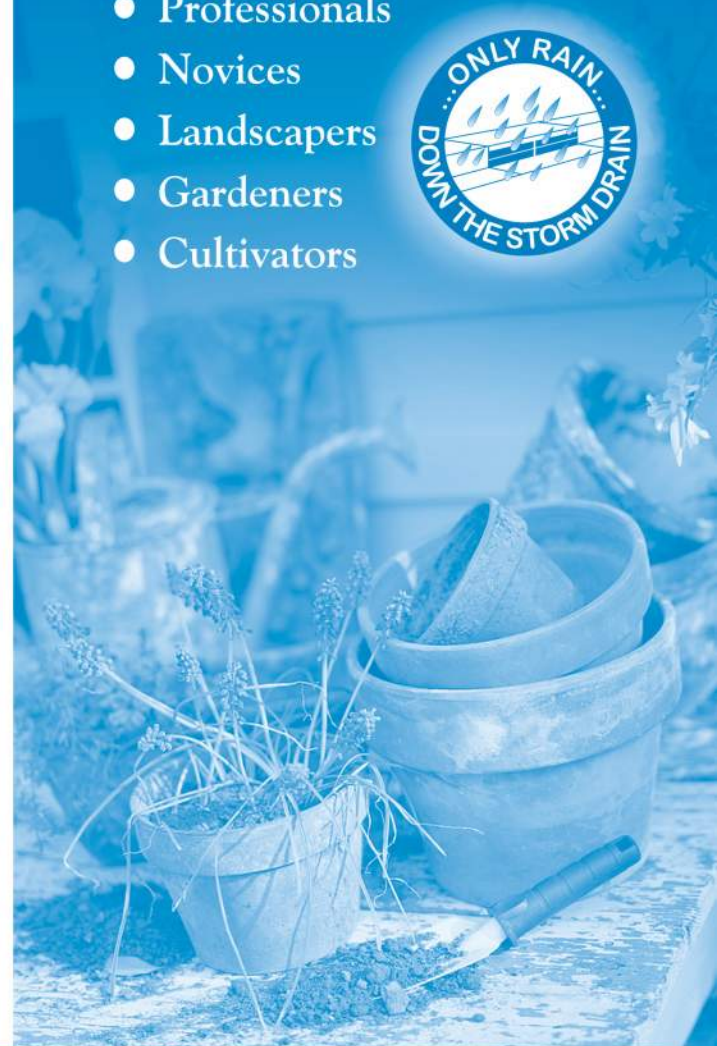

Tips for Landscape & Gardening

This brochure will help you to get the most of your lawn and gardening efforts and keep our waterways clean. Clean waterways provide recreation, establish thriving fish habitats, secure safe sanctuaries for wildlife, and add beauty to our communities. NEVER allow gardening products or waste water to enter the street, gutter or storm drain.

General Landscaping Tips

- Protect stockpiles and materials from wind and rain by storing them under tarps or secured plastic sheeting.
- Prevent erosion of slopes by planting fast-growing, dense ground covering plants. These will shield and bind the soil.
- Plant native vegetation to reduce the amount of water, fertilizers and pesticides applied to the landscape.
- Never apply pesticides or fertilizers when rain is predicted within the next 48 hours.



Garden & Lawn Maintenance

- Do not overwater. Use irrigation practices such as drip irrigation, soaker hoses or micro-spray systems. Periodically inspect and fix leaks and misdirected sprinklers.

- Do not rake or blow leaves, clippings or pruning waste into the street, gutter or storm drain. Instead, dispose of green waste by composting, hauling it to a permitted landfill, or recycling it through your city's program.



- Consider recycling your green waste and adding "nature's own fertilizer" to your lawn or garden.
- Read labels and use only as directed. Do not over-apply pesticides or fertilizers. Apply to spots as needed, rather than blanketing an entire area.
- Store pesticides, fertilizers and other chemicals in a dry covered area to prevent exposure that may result in the deterioration of containers and packaging.
- Rinse empty pesticide containers and re-use rinse water as you would use the product. Do not dump rinse water down storm drains or sewers. Dispose of empty containers in the trash.
- When available, use non-toxic alternatives to traditional pesticides, and use pesticides specifically designed to control the pest you are targeting.

- Try natural long-term common sense solutions first. Integrated Pest Management (IPM) can provide landscaping guidance and solutions, such as:

- ◆ **Physical Controls** - Try hand picking, barriers, traps or caulking holes to control weeds and pests.
- ◆ **Biological Controls** - Use predatory insects to control harmful pests.
- ◆ **Chemical Controls** - Check out www.ipm.ucdavis.edu before using chemicals. Remember, all chemicals should be used cautiously and in moderation.

- If fertilizer is spilled, sweep up the spill before irrigating. If the spill is liquid, apply an absorbent material such as cat litter, and then sweep it up and dispose of it in the trash.
- Take unwanted pesticides to a Household Waste Collection Center to be recycled.
- *Dumping toxics into the street, gutter or storm drain is illegal!*

www.bewaterwise.com Great water conservation tips and drought tolerant garden designs.

www.ourwaterourworld.com Learn how to safely manage home and garden pests.

Additional information can also be found on the back of this brochure.

For Information:

For information on “closed-loop” suppliers and recycling/disposal vendors, contact:

County of Riverside
Health Services Agency
Department of Environmental Health
at (909) 358-5055.

SPILL RESPONSE AGENCY:

HAZ-MAT: (909) 358-5055
AFTER 5:00 P.M.: (909) 358-5245 OR 911

HAZARDOUS WASTE DISPOSAL: (909) 358-5055

RECYCLING INFORMATION: 1-800-366-SAVE

TO REPORT ILLEGAL DUMPING OR A CLOGGED
STORM DRAIN: 1-800-506-2555

To order additional brochures or to obtain information on other pollution prevention activities, call: (909) 955-1111.

The Cities and County of Riverside
StormWater/CleanWater Protection Program

1-800-506-2555



Riverside County gratefully acknowledges the Santa Clara Valley Nonpoint Source Pollution Control Program, Alameda Countywide Clean Water Program and the San Bernardino County Stormwater Program for information provided in this brochure.

StormWater Pollution

What you should know for...



THE FOOD SERVICE INDUSTRY

Best Management Practices (BMPs) for:

- Restaurants
- Grocery Stores
- Delicatessens
- Bakeries

StormWater Pollution . . . What You Should Know

Riverside County has two drainage systems - sanitary sewers and storm drains. The storm drain system is designed to help prevent flooding by carrying excess rainwater away from streets. Since the storm drain system does not provide for water treatment, it also serves the *unintended* function of transporting pollutants directly to our waterways.

Unlike sanitary sewers, storm drains are not connected to a treatment plant - they flow directly to our local streams, rivers and lakes.

Waste or washwater generated by the food service industry often contains materials such as food wastes, oil, grease, detergents, and degreasers. These materials can degrade local waters when allowed to flow into a storm drain system.

Stormwater pollution causes as much as 60% of our water pollution problem. It jeopardizes the quality of our waterways and poses a threat to groundwater resources if pollutants percolate through soil.



The Cities and County of Riverside StormWater/CleanWater Protection Program

Since preventing pollution is much easier, and less costly, than cleaning up “after the fact,” the Cities and County of Riverside StormWater/CleanWater Protection Program informs residents and businesses on pollution prevention activities such as the Best Management Practices (BMPs) described in this pamphlet.


The Cities and County of Riverside have adopted ordinances for stormwater management and discharge control. In accordance with state and federal law, these local stormwater ordinances **prohibit** the discharge of wastes into the storm drain system or local surface waters. This includes discharges from the food service industry containing food wastes, oil, grease, detergents, and degreasers.

PLEASE NOTE: A common stormwater pollution problem associated with the food service industry is the discharge of washwater into alleys and gutters, and the hosing down of outdoor areas. Often, these activities flush pollutants into the storm drain system. The discharges of pollutants is **strictly prohibited** by local ordinances and state and federal regulations.

A Menu of Activities . . . to Keep Our Water Clean

Cleanin' It Right . . .

Pour mop and wash water into the mop sink or down floor drains . . . not into gutters, alleys, parking lots or a storm drain. Wash greasy equipment only in designated wash areas which are properly connected to the sewer system with an appropriate oil/water separator. Also, avoid washing kitchen mats, garbage containers, and other items in areas where wastewater is likely to flow into a storm drain.



Watch Out For Spills . . .

Use dry methods for spill cleanup. Don't hose down outside spills. Use rags or absorbents such as cat litter and then dispose of in the garbage, or handle as hazardous waste as appropriate. If necessary, mop the area with a minimum amount of water.



Proper Storage and Disposal . . .


General cleaners, floor cleaners, solvents, and detergents often contain toxic substances. Read labels carefully and store and dispose of these products properly.

REMEMBER: Don't throw toxic waste into the trash or into a storm drain. To report toxic spill call 911. For information on hazardous waste pick-up call (909) 358-5055.



Grease and Oil . . .

Handle and dispose of grease properly. Save used cooking grease and oil for recycling in tallow bins or sealed containers. Never pour grease into a sink, floor drain, dumpster or storm drain. Watch out for, and report to management, overflowing grease interceptors. Call (909) 358-5172 for disposal information.

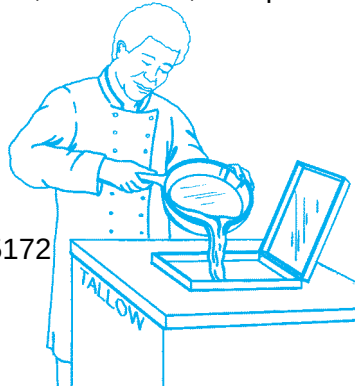


How 'Bout That Dumpster . . .

Keep dumpster and loading dock areas clean. Control litter by sweeping - don't hose down the area. Replace leaky dumpsters and keep lids closed to keep out rainwater.



Use Water-Friendly Products . . .

Whenever possible, purchase water-based cleaning products. Look for products labeled "non-toxic," "non-petroleum based," "ammonia-free," "phosphate-free," and "perfume-free," or "readily biodegradable."



Outdoor/Sidewalk Areas . . .

Sweep up food particles, cigarette butts, and trash from outdoor dining areas before rinsing or steam cleaning. Don't use toxic bleaches or detergents when you pressure wash outdoor dining areas, entrances or surrounding sidewalk areas.



You may be already implementing many of the BMPs prescribed in this brochure. However, if you discover any potential problem areas, please consider using one or more of the recommended BMPs.

Also, please note that the Riverside County Environmental Health Department will monitor potential sources of stormwater pollution activities during regularly scheduled inspections of food service facilities. If Health Department staff observe activities which may be contributing to stormwater pollution, suggestions will be provided and/or use of prescribed BMPs listed in this brochure will be offered.

Please remember:



Everyone contributes a little to the problem of stormwater pollution. Now it's time for all of us to become part of the solution!

Tips for

waterwise **LIVING**

in Southern California

home and garden



bewaterwise.com

Water Saving Tips for Home & Garden

Conserving water is nothing new to Southern Californians. We've been doing it for years, and our water-efficient practices have set standards that distinguish us from the rest of the nation.

But there's always room for improvement. Most of us have replaced our toilets and showerheads with more efficient models. When we turn our attention outdoors, we zero in on where the majority of water is used. Depending on lot size and climate zone, between 30 and 70 percent of all household water is used for landscape irrigation. And on top of that, the average homeowner uses twice the water needed to keep plants healthy.





The California Friendly® garden offers a less thirsty, more environmentally friendly and eye-catching way to save water.

The good news is that saving water—both indoor and outdoor—doesn't have to mean inconvenience if you are thoughtful and use only what you need. We've collected some easy tips and tasks you can do to make your home even more water efficient.

For a comprehensive list of current rebates and other incentive and training programs for both residential and business customers, visit *bewaterwise.com*.

bewaterwise.com





Beautiful and Water California Friendly Gardens—

You can have a garden that is beautiful and water-wise by following these basic principles:

- Use less thirsty plants in your garden. Keep turf grass (the thirstiest plant of all!) to a minimum. Use warm-season turf and look for native and California Friendly plants that are well suited to regional and local conditions. Warm season turf include St. Augustine for shaded lawns and Zoysia ‘Victoria’, De Anza or hybrid Bermuda for sunny lawns. Log on to *bewaterwise.com* and check out the California Friendly Gardening Guide, with garden templates, pictures and information on plants that look great and use little water.
- Water plants only when needed. Water in the early morning, when evaporation is low and air is calmer. Avoid runoff and over spray. Use tools such as the Watering Calculator and Watering Index (you can find them at *bewaterwise.com*) to adjust watering times to plant needs. Cash in on rebates for smart sprinkler controllers and precision rotating sprinkler heads.
- Group plants thoughtfully. When selecting trees, shrubs, ground covers, perennials and annuals for your garden, look for varieties that naturally grow together and use about the same amount of water.



Wise Landscapes

- Improve your soil. Routinely cultivate your soil, incorporating organic matter such as compost. This will help the soil's ability to resist evaporation and retain moisture. Aerate heavy or compacted soil around trees.
- Mulch. **Save 20-30 gallons** of water per day by using mulch around trees and plants. A two- to four-inch layer of mulch also evens out extreme temperature and retains moisture. It prevents soil from crusting, allowing better water penetration.
- Plant trees. Trees help to lower air and soil temperatures, reducing plant and soil moisture loss.
- Group container plants with similar needs. Arrange containers so they shade one another. During droughts or periods of drying winds, place them in the deepest shade they can tolerate. Wet the entire rootball; double the size by transferring plants from smaller pots into larger pots with a layer of soil around and under the root ball. Top-dress pots with a layer of mulch over the soil.
- Have turf only where you need it and water only when needed. Step on your grass. If it springs back when you lift your foot, it doesn't need water.
- Set lawn mower blades one notch higher. Longer grass means less evaporation.

Sprinklers



If you have automatic sprinklers, chances are you are watering more often than needed. Follow these simple steps to make sure you are using the right amount of water.

- Re-examine your watering schedule by using the Watering Calculator at bewaterwise.com. It takes into account variables like plant needs, soil conditions and weather.
- Reduce irrigation cycles by 1-3 minutes or eliminate one cycle per week and **save 15-25 gallons per minute** and up to **250 gallons per cycle**.
- Water only before 8 am to reduce evaporation and wind interference and **save 20-25 gallons per day**.
- Invest in a “smart controller” and let it adjust your watering needs automatically. Smart controllers take over decisions about when and how much to water and **save about 40 gallons a day**.
- Replace the sprinklers. Upgrade your sprinklers with new, water-saving rotary nozzles that keep your landscape healthy while reducing run-off.
- Adjust sprinklers to prevent overspray and runoff and **save 15-25 gallons per day**.
- Repair leaks and broken sprinkler heads and **save up to 20 gallons per leak per day**.
- If you consult a landscape contractor, ask them about their knowledge of water-efficient landscaping.

bewaterwise.com



- Don't water when it's raining, and adjust your sprinklers for cool, overcast days. Many automatic timers can be fitted with rain shutoff devices.
- If you decide to convert your landscape to a California Friendly version, don't be overwhelmed. You can work in sections, a little at a time, to make it more manageable and more fun. Start with container pots and keep on going! You can **save 33-60 gallons per day** per 1,000 square feet depending on climate if you replace some lawn with California Friendly plants.

For more product information, visit bewaterwise.com.

Other Outdoor Tips

- If you have a pool or spa, use an insulated cover to cut down on evaporation. Repairing leaks around the pool and spa pumps can **save 20 gallons per leak per day**.
- If you have an evaporative air conditioner, direct the water drain line to a flowerbed, tree base or lawn.
- Use a broom to clean your driveway or sidewalk, not your hose. Make sure your gardener also complies. **This saves 8-18 gallons per minute** depending on water pressure and hose size.
- Instead of washing your car at home, find a professional carwash that recycles water. Or if you wash your car at home, use a bucket and turn the hose off between rinses.

Indoor



Bathroom

- Replace your toilet with a new high-efficiency toilet, or dual-flush toilet. Go to bewaterwise.com for a list of models eligible for rebates.

- Remember not to use your toilet as a trash can.

You'll save 1.6 gallons every flush.

- Is your toilet leaking? Put food coloring in the tank and see if it enters the bowl without flushing. If it does, replace the flapper. A leaky toilet wastes 30-50 gallons per day.

- Install a new water-efficient showerhead. It stretches the availability of hot water and saves energy.

- While waiting for the shower to warm up, catch the cold water in a container to use on plants. **A shorter shower saves 2.5 gallons per minute.**

- Turn off the water while brushing your teeth or while shaving and **save 2 gallons per minute.**



Plumbing

- Fix leaky faucets and plumbing joints inside and outside of your home. **You'll save 15-20 gallons per leak per day.**
- The next time a plumber visits, have him or her check your household water pressure, and if it is more than 80 psi, ask the plumber to install a pressure regulator.
- If you have a rotary dial water meter, check to see if there are any leaks. If it's spinning and there's no water being used, there is probably an undetected leak somewhere.



Appliances

- Use the garbage disposal less and garbage can more. Consider composting.
- Run only full loads in the clothes washing machine. **You'll save 15-50 gallons per load.**
- Select a high-efficiency clothes washer when replacing your old machine. For a list of current models and rebates, visit bewaterwise.com. **Save 20-30 gallons per load.**
- When washing dishes by hand, use the least amount of detergent possible. If you have two sinks, fill one with rinse water. If you only have one sink, use a spray device or short blasts instead of letting the water run. If you don't leave the water running when rinsing dishes, **you'll save 2.5 gallons per minute.**



- Run only full loads in the dishwasher and **save 2-4.5 gallons per load.**
- If your automatic water softener recharges using a time clock, turn down its recharge frequency and remember to turn it off when you go away for a few days.

Kitchen

- Defrost frozen foods without running water. Either plan ahead by placing frozen items in the refrigerator overnight or defrost them in the microwave.
- Clean vegetables by rinsing them in a filled sink or pan.



bewaterwise.com



A Citizen's Guide to Understanding Stormwater



EPA 833-B-03-002

January 2003

Internet Address (URL) • HTTP://www.epa.gov
Recycled/Recyclable • Printed With Vegetable
Oil Based Inks on 100% Postconsumer
Process Chlorine Free Recycled Paper

For more information contact:
www.epa.gov/nps/stormwater
or visit
www.epa.gov/nps

After the Storm



What is stormwater runoff?



Stormwater runoff occurs when precipitation from rain or snowmelt flows over the ground. Impervious surfaces like driveways, sidewalks, and streets prevent stormwater from naturally soaking into the ground.

Why is stormwater runoff a problem?



Stormwater can pick up debris, chemicals, dirt, and other pollutants and flow into a storm sewer system or directly to a lake, stream, river, wetland, or coastal water. Anything that enters a storm sewer system is discharged untreated into the waterbodies we use for swimming, fishing, and providing drinking water.

The effects of pollution

Polluted stormwater runoff can have many adverse effects on plants, fish, animals, and people.

- ◆ Sediment can cloud the water and make it difficult or impossible for aquatic plants to grow. Sediment also can destroy aquatic habitats.
- ◆ Excess nutrients can cause algae blooms. When algae die, they sink to the bottom and decompose in a process that removes oxygen from the water. Fish and other aquatic organisms can't exist in water with low dissolved oxygen levels.
- ◆ Bacteria and other pathogens can wash into swimming areas and create health hazards, often making beach closures necessary.
- ◆ Debris—plastic bags, six-pack rings, bottles, and cigarette butts—washed into waterbodies can choke, suffocate, or disable aquatic life like ducks, fish, turtles, and birds.
- ◆ Household hazardous wastes like insecticides, pesticides, paint, solvents, used motor oil, and other auto fluids can poison aquatic life. Land animals and people can become sick or die from eating diseased fish and shellfish or ingesting polluted water.



- ◆ Polluted stormwater often affects drinking water sources. This, in turn, can affect human health and increase drinking water treatment costs.

Stormwater Pollution Solutions

Residential

Recycle or properly dispose of household products that contain chemicals, such as insecticides, pesticides, paint, solvents, and used motor oil and other auto fluids. Don't pour them onto the ground or into storm drains.

Lawn care

Excess fertilizers and pesticides applied to lawns and gardens wash off and pollute streams. In addition, yard clippings and leaves can wash into storm drains and contribute nutrients and organic matter to streams.

- ◆ Don't overwater your lawn. Consider using a soaker hose instead of a sprinkler.
- ◆ Use pesticides and fertilizers sparingly. When use is necessary, use these chemicals in the recommended amounts. Use organic mulch or safer pest control methods whenever possible.
- ◆ Compost or mulch yard waste. Don't leave it in the street or sweep it into storm drains or streams.
- ◆ Cover piles of dirt or mulch being used in landscaping projects.



Septic systems

Leaking and poorly maintained septic systems release nutrients and pathogens (bacteria and viruses) that can be picked up by stormwater and discharged into nearby waterbodies. Pathogens can cause public health problems and environmental concerns.

- ◆ Inspect your system every 3 years and pump your tank as necessary (every 3 to 5 years).
- ◆ Don't dispose of household hazardous waste in sinks or toilets.



Auto care

Washing your car and degreasing auto parts at home can send detergents and other contaminants through the storm sewer system. Dumping automotive fluids into storm drains has the same result as dumping the materials directly into a waterbody.

- ◆ Use a commercial car wash that treats or recycles its wastewater, or wash your car on your yard so the water infiltrates into the ground.
- ◆ Repair leaks and dispose of used auto fluids and batteries at designated drop-off or recycling locations.



Pet waste

Pet waste can be a major source of bacteria and excess nutrients in local waters.

- ◆ When walking your pet, remember to pick up the waste and dispose of it properly. Flushing pet waste is the best disposal method. Leaving pet waste on the ground increases public health risks by allowing harmful bacteria and nutrients to wash into the storm drain and eventually into local waterbodies.



Residential landscaping

Permeable Pavement—Traditional concrete and asphalt don't allow water to soak into the ground. Instead these surfaces rely on storm drains to divert unwanted water. Permeable pavement systems allow rain and snowmelt to soak through, decreasing stormwater runoff.

Rain Barrels—You can collect rainwater from rooftops in mosquito-proof containers. The water can be used later on lawn or garden areas.

Rain Gardens and Grassy Swales—Specially designed areas planted with native plants can provide natural places for rainwater to collect and soak into the ground. Rain from rooftop areas or paved areas can be diverted into these areas rather than into storm drains.

Vegetated Filter Strips—Filter strips are areas of native grass or plants created along roadways or streams. They trap the pollutants stormwater picks up as it flows across driveways and streets.



Commercial


Dirt, oil, and debris that collect in parking lots and paved areas can be washed into the storm sewer system and eventually enter local waterbodies.

- ◆ Sweep up litter and debris from sidewalks, driveways and parking lots, especially around storm drains.
- ◆ Cover grease storage and dumpsters and keep them clean to avoid leaks.
- ◆ Report any chemical spill to the local hazardous waste cleanup team. They'll know the best way to keep spills from harming the environment.

Erosion controls that aren't maintained can cause excessive amounts of sediment and debris to be carried into the stormwater system. Construction vehicles can leak fuel, oil, and other harmful fluids that can be picked up by stormwater and deposited into local waterbodies.

- ◆ Divert stormwater away from disturbed or exposed areas of the construction site.
- ◆ Install silt fences, vehicle mud removal areas, vegetative cover, and other sediment and erosion controls and properly maintain them, especially after rainstorms.
- ◆ Prevent soil erosion by minimizing disturbed areas during construction projects, and seed and mulch bare areas as soon as possible.

Construction

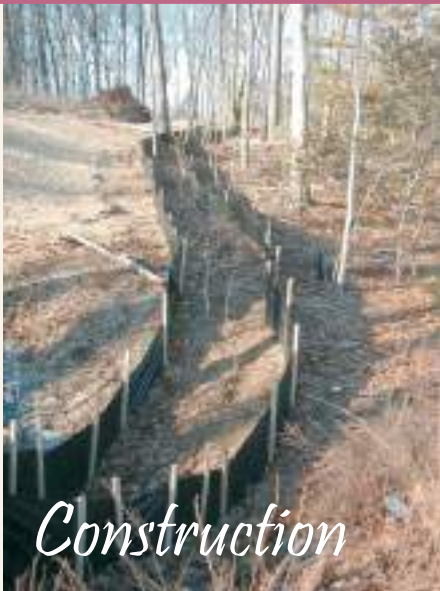

Agriculture

Lack of vegetation on streambanks can lead to erosion. Overgrazed pastures can also contribute excessive amounts of sediment to local waterbodies. Excess fertilizers and pesticides can poison aquatic animals and lead to destructive algae blooms. Livestock in streams can contaminate waterways with bacteria, making them unsafe for human contact.

- ◆ Keep livestock away from streambanks and provide them a water source away from waterbodies.
- ◆ Store and apply manure away from waterbodies and in accordance with a nutrient management plan.
- ◆ Vegetate riparian areas along waterways.
- ◆ Rotate animal grazing to prevent soil erosion in fields.
- ◆ Apply fertilizers and pesticides according to label instructions to save money and minimize pollution.



Forestry

Improperly managed logging operations can result in erosion and sedimentation.

- ◆ Conduct preharvest planning to prevent erosion and lower costs.
- ◆ Use logging methods and equipment that minimize soil disturbance.
- ◆ Plan and design skid trails, yard areas, and truck access roads to minimize stream crossings and avoid disturbing the forest floor.
- ◆ Construct stream crossings so that they minimize erosion and physical changes to streams.
- ◆ Expedite revegetation of cleared areas.




Automotive Facilities



Uncovered fueling stations allow spills to be washed into storm drains. Cars waiting to be repaired can leak fuel, oil, and other harmful fluids that can be picked up by stormwater.

- ◆ Clean up spills immediately and properly dispose of cleanup materials.
- ◆ Provide cover over fueling stations and design or retrofit facilities for spill containment.
- ◆ Properly maintain fleet vehicles to prevent oil, gas, and other discharges from being washed into local waterbodies.
- ◆ Install and maintain oil/water separators.

As stormwater flows over driveways, lawns, and sidewalks, it picks up debris, chemicals, dirt, and other pollutants. Stormwater can flow into a storm sewer system or directly to a lake, stream, river, wetland, or coastal water. Anything that enters a storm sewer system is discharged untreated into the waterbodies we use for swimming, fishing, and providing drinking water. Polluted runoff is the nation's greatest threat to clean water.

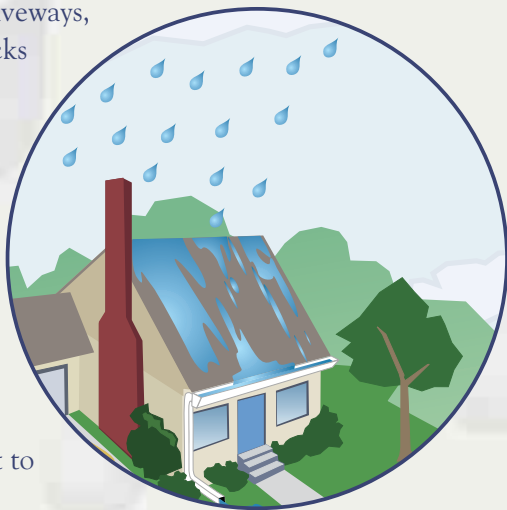

By practicing healthy household habits, homeowners can keep common pollutants like pesticides, pet waste, grass clippings, and automotive fluids off the ground and out of stormwater. Adopt these healthy household habits and help protect lakes, streams, rivers, wetlands, and coastal waters. Remember to share the habits with your neighbors!

Healthy Household Habits for Clean Water

Vehicle and Garage

- Use a commercial car wash or wash your car on a lawn or other unpaved surface to **minimize** the amount of dirty, soapy water flowing into the storm drain and eventually into your local waterbody.



- Check your car, boat, motorcycle, and other machinery and equipment for leaks and spills. Make repairs as soon as possible. Clean up **spilled fluids** with an absorbent material like kitty litter or sand, and don't rinse the spills into a nearby storm drain. Remember to properly dispose of the absorbent material.

- **Recycle** used oil and other automotive fluids at participating service stations. Don't dump these chemicals down the storm drain or dispose of them in your trash.


Lawn and Garden

- Use pesticides and fertilizers **sparingly**. When use is necessary, use these chemicals in the recommended amounts. Avoid application if the forecast calls for rain; otherwise, chemicals will be washed into your local stream.
- Select **native** plants and grasses that are drought- and pest-resistant. Native plants require less water, fertilizer, and pesticides.
- **Sweep up** yard debris, rather than hosing down areas. Compost or recycle yard waste when possible.

- Don't overwater your lawn. Water during the **cool** times of the day, and don't let water run off into the storm drain.
- Cover piles of dirt and mulch being used in landscaping projects to prevent these pollutants from blowing or washing off your yard and into local waterbodies. **Vegetate** bare spots in your yard to prevent soil erosion.

Home Repair and Improvement

- Before beginning an outdoor project, locate the nearest storm drains and **protect** them from debris and other materials.
- **Sweep up** and properly dispose of construction debris such as concrete and mortar.
- Use hazardous substances like paints, solvents, and cleaners in the **smallest amounts possible**, and follow the directions on the label. Clean up spills **immediately**, and dispose of the waste safely. Store substances properly to avoid leaks and spills.
- Purchase and use **nontoxic, biodegradable, recycled, and recyclable** products whenever possible.
- **Clean** paint brushes in a sink, not outdoors. Filter and reuse paint thinner when using oil-based paints. Properly dispose of excess paints through a household hazardous waste collection program, or donate unused paint to local organizations.
- **Reduce** the amount of paved area and increase the amount of vegetated area in your yard. Use native plants in your landscaping to reduce the need for watering during dry periods. Consider directing downspouts away from paved surfaces onto lawns and other measures to increase infiltration and reduce polluted runoff.

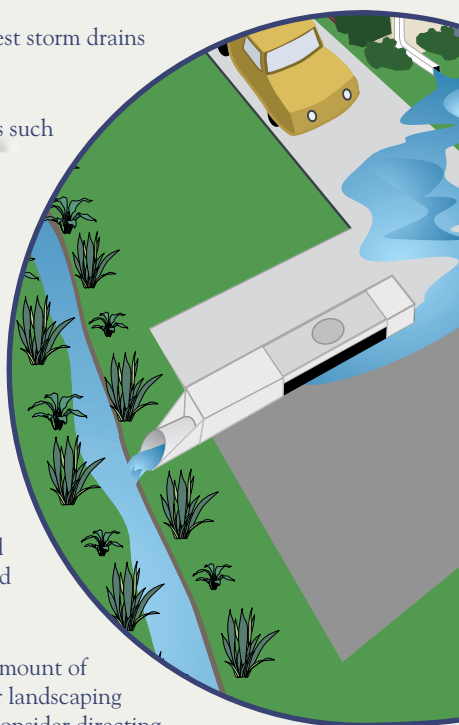



Make your home The SOLUTION TO STORMWATER POLLUTION!

A homeowner's guide to healthy
habits for clean water



Remember: Only rain down the drain!

For more information, visit
www.epa.gov/npdes/stormwater
or
www.epa.gov/nps



Internet Address (URL) • [HTTP://www.epa.gov](http://www.epa.gov)
Recycled/Recyclable • Printed With Vegetable Oil Based Inks on 100% Postconsumer,
Process Chlorine Free Recycled Paper

Storm drains connect to waterbodies!

- Flush responsibly. Flushing household chemicals like paint, pesticides, oil, and antifreeze can destroy the biological treatment taking place in the system. Other items, such as diapers, paper towels, and cat litter, can clog the septic system and potentially damage components.
- Care for the septic system drainfield by **not** driving or parking vehicles on it. Plant only grass over and near the drainfield to avoid damage from roots.
- Have your septic system **inspected** by a professional at least every 3 years, and have the septic tank **pumped** as necessary (usually every 3 to 5 years).

Septic System Use and Maintenance

- Properly store pool and spa chemicals to **prevent** leaks and spills, preferably in a covered area to avoid exposure to stormwater.
- Whenever possible, drain your pool or spa into the **sanitary** sewer system.
- **Drain** your swimming pool only when a test kit does not detect chlorine levels.

Swimming Pool and Spa

- When walking your pet, remember to **pick up** the waste and dispose of it properly. Flushing pet waste is the best disposal method. Leaving pet waste on the ground increases public health risks by allowing harmful bacteria and nutrients to wash into the storm drain and eventually into local waterbodies.

Pet Care